UTILITY TYPICAL APPLICATIONS

UTA-13 Closure in Center of Intersection

1. Prohibit left turns if required by traffic conditions. It may be physically impossible to turn left, especially for large vehicles.
2. A minimum of six channelizing devices shall be used for each taper.
3. For short-duration operations, the channelizing devices (cones, etc.) may be eliminated if a flashing or revolving yellow light is displayed in the work space.
4. Flashing warning lights may be used to call attention to the advance warning signs.
5. This is a special case. Check with local city or county permit agencies before proceeding with this or similar typicals.

TAFT

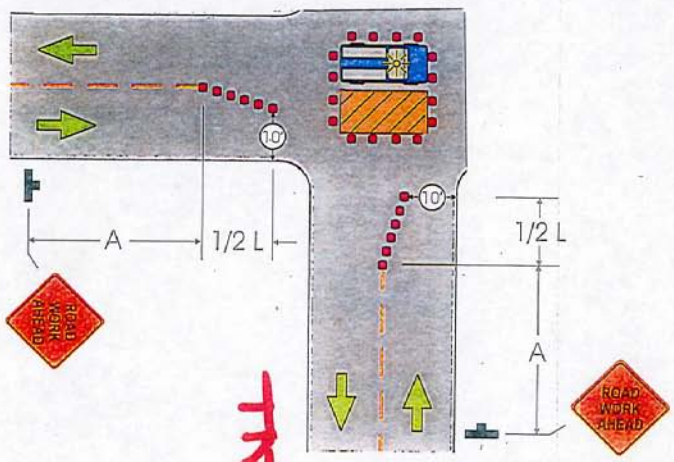

PM 31062515

SIGN SPACING	DISTANCE
ROAD TYPE	A
Urban - 25 MPH or less	200'
Urban - 30 MPH or more	350'
Rural	500'
Expressway/Freeway	1000'

SEE:
- TABLE 1 for Buffer Length (page 26)
- TABLE 4 for "L" & Channelizer (cones, etc.) Quantity (page 28)

NOTE: LOCAL REGULATIONS MAY VARY.

PGEFM1A

© Copyright 2002 InCom, Inc. All rights reserved.

MARSHALL