UTA-5 Lane Closure on Urban Street, Flagger Control

1. The traffic control procedure shown is appropriate only for low-speed, low-volume streets/roads where traffic cannot regulate itself due to visibility, conditions, volume, etc.
2. A single flagger can regulate traffic when volumes are low and the length of the work space is short, thus enabling drivers to readily see the roadway beyond.
3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. The one-lane, two-way taper is used in advance of an activity area that occupies part of a two-way roadway in such a manner that a portion of the roadway is used alternately by traffic on both directions. Typically, a flagger controls traffic. A short taper of 100 feet maximum with channelizing devices (cones, etc.) at approximately 16 foot spacing should be used to guide traffic into the one-way section.

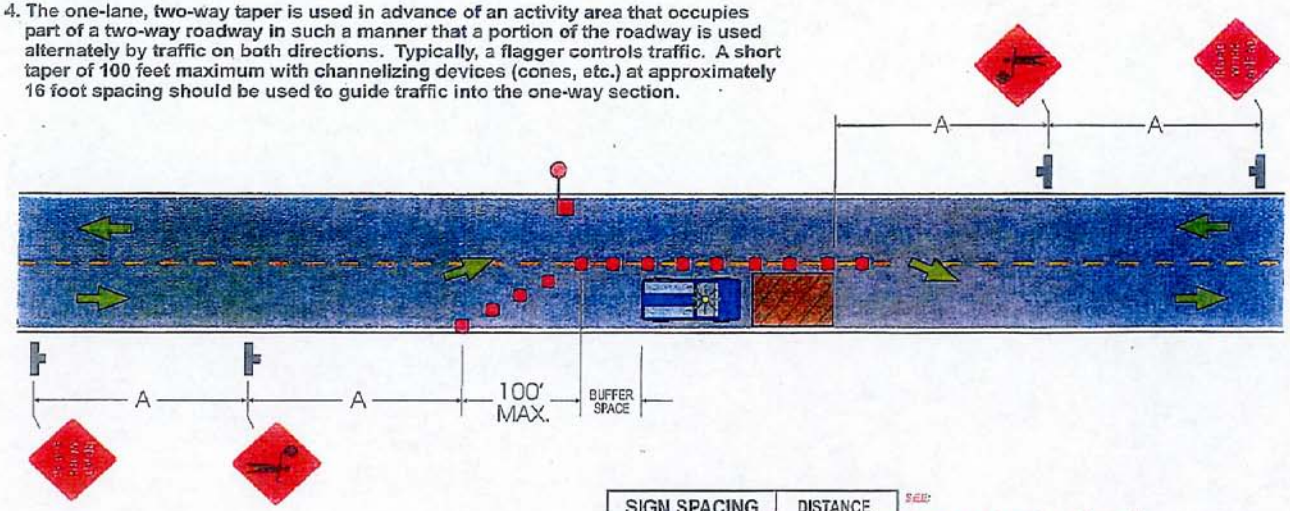

SIGN SPACING	DISTANCE
ROAD TYPE	A
Urban - 25 MPH or less	200'
Urban - 30 MPH or more	350'
Rural	500'
Expressway/Freeway	1000'

SEE:
- TABLE 1 for Buffer Length (page 26)
- TABLE 4 for "L" & Channelizer (cones, etc.) Quantity (page 28)

NOTE: LOCAL REGULATIONS MAY VARY.

PGEFM1A

© Copyright 2002 InCom, Inc. All rights reserved.

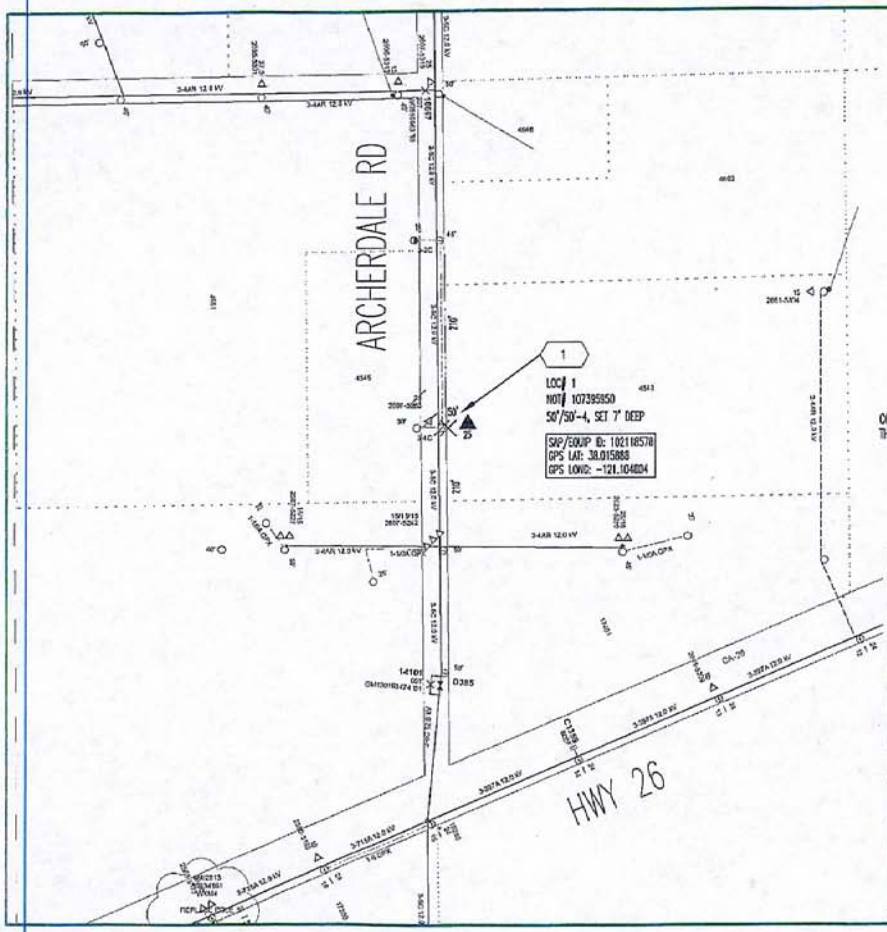

COORDINATE WITH COMCAST THE TRANSFER OF THEIR FACILITIES DURING THE POLE REPLACEMENT.

NOTE: CONTACT POLE INFO.
COMCAST
TOMMY HENSON 209-955-6550
6505 TAM O' SHANTER, STOCKTON 95210
AGREEMENT # 16-005 (2005-1007)

INSTALL
50' CL. 4 CONTACT POLE
25 KVA 1ø XF

REMOVE
50' CL. 4 CONTACT POLE
25 KVA 1ø XF

1
COORDINATE #
182607-55263
LOADING DISTRICT
SUMMER INTERIOR
TX SIZE – 15
KVA 1ø – 12
KVA 3ø – N/A
% L.F. – 34%

PROJECT CONDITIONS STAMP
Type(s) of Work:
☐ New Business
☒ PG&E Maintenance & Construction
Project Conditions:
☐ NONE APPARENT (if project design changes, contact ASC) or
☒ CONDITIONS APPLY:
☒ PERMITS ☐ RAILROAD ☐ OTHER
(Provide additional information on line below)
SAN JOAQUIN COUNTY ENCROACHMENT PERMIT
BY: _____
SIGNATURE, NAME, CORPORATE ID, DATE

PLAT MAP: T1513
CIRCUIT MAP: 30421
SSD: FUSE 14101
SUB/CIRCUIT: LINDEN 1102
LIGHT LOADING
SUMMER INTERIOR
B INSULATION DISTRICT
NON CORROSION AREA
RAPTOR AREA = YES
FIRE AREA = NO
CLASS 2 VOLTAGE AREA, 12KV
DISTRICT 3 SURGE PROTECTION

REPLACE 1 POLE

4561 ARCHERDALE RD
LINDEN
PM 31036461 / NOT# 107395950

PACIFIC GAS AND ELECTRIC COMPANY

CD:	
SD:	
NOTIF.: 107395950	
OTHER:	
SHT.: 1 OF 1	SHEETS
PM: 31036461	REV.

EST: JLRX 916-760-6828	
ADE: SJKA 916-760-1954	
SUPV: BXST 916-760-5360	
REP: KDY2 209-942-1622	
PLNR: N/A	
SCALE: NTS	DATE: 4/10/14

PAGE 1