UTA-10 Right lane Closure Far Side of Intersection

1. For intersection approaches reduced to a single lane, left turning movements may be prohibited to maintain capacity for through traffic.
2. The standard procedure is to close on the near side of the intersection any lane that is not carried through the intersection.
3. If the work space extends beyond a cross-walk then close the crosswalk.
4. Flashing warning lights may be used to call attention to the advance warning signs.

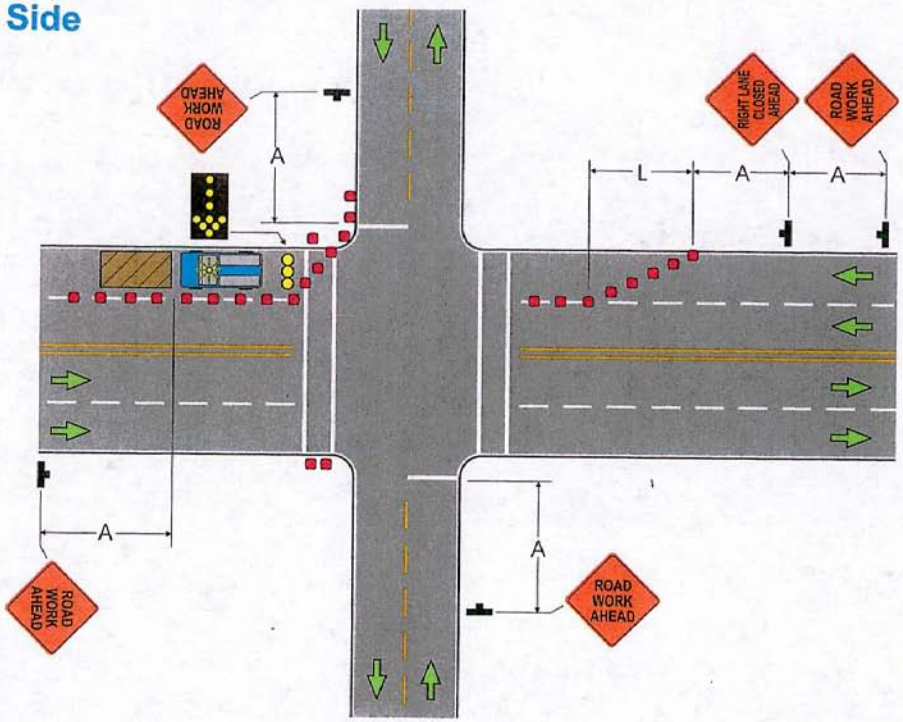

SIGN SPACING	DISTANCE
ROAD TYPE	A
Urban - 25 MPH or less	200'
Urban - 30 MPH or more	350'
Rural	500'
Expressway/Freeway	1000'

SEE:
• TABLE 1 for Buffer Length (page 26)
• TABLE 4 for "L" & Channelizer (cones, etc.) Quantity (page 28)

NOTE: LOCAL REGULATIONS MAY VARY.

PGEFM1A

© Copyright 2002 InCom, Inc. All rights reserved.