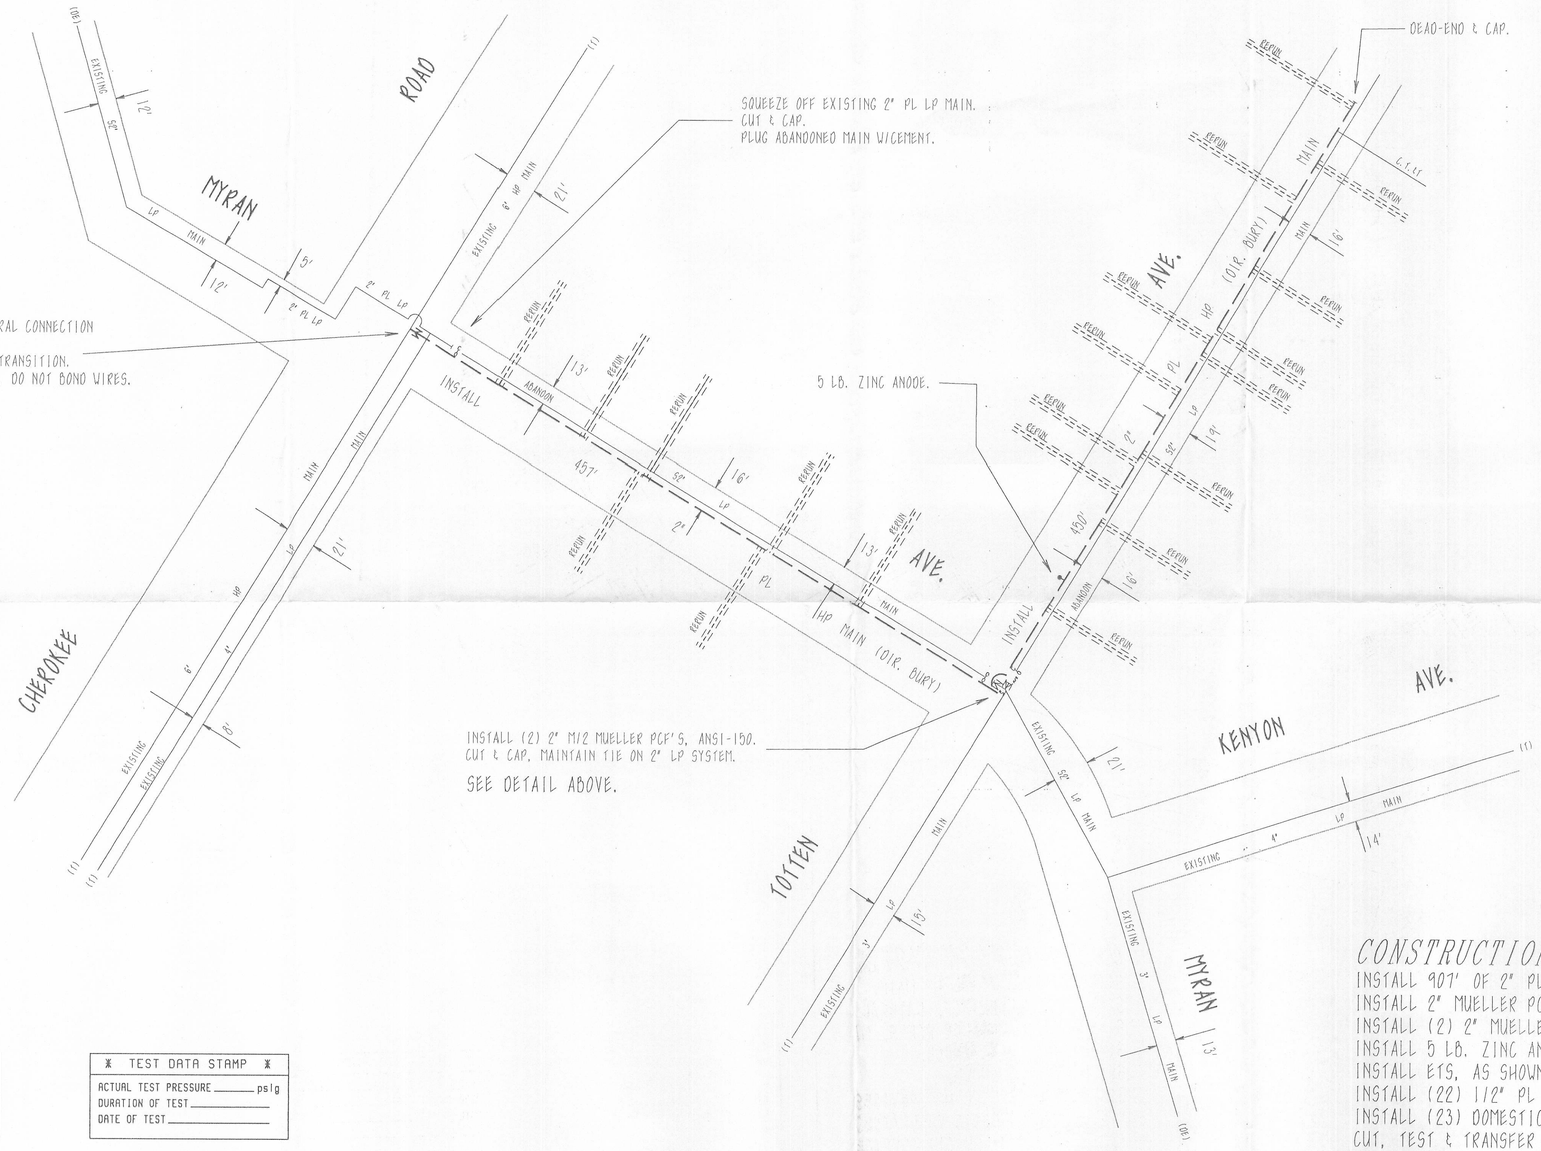

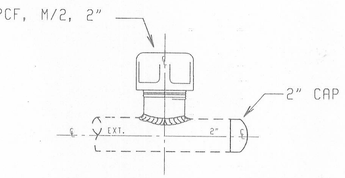

DETAIL
NOT TO SCALE

A PCF M/2

NOTE:
LEAK TEST THE MUELLER PCF AT 100 PSIG BEFORE TAPPING.

CONSTRUCTION NOTES:

INSTALL 907' OF 2" PL HP MAIN.
INSTALL 2" MUELLER PCF, LATERAL CONNECTION, ANSI-150.
INSTALL (2) 2" MUELLER PCF'S, M/2, ANSI-150.
INSTALL 5 LB. ZINC ANODE.
INSTALL ETS, AS SHOWN.
INSTALL (22) 1/2" PL HP SERVICES.
INSTALL (23) DOMESTIC REGULATORS.
CUT, TEST & TRANSFER (1) SERVICE.
SHUTDOWN AND RELITE (23) CUSTOMERS.
CUT OFF OLD MAIN.
TIE IN AS SHOWN.

WM 3005 - B4, B5
CPA #300514

PLASTIC PIPE INSPECTION/DATA
PIPE MANUFACTURER _____
DATE MANUFACTURED _____

* TEST DATA STAMP *
ACTUAL TEST PRESSURE _____ psig
DURATION OF TEST _____
DATE OF TEST _____

PLEASE CALL U.S.A. AT LEAST 48 HOURS PRIOR TO EXCAVATING IN THIS AREA
1-800-642-2444

WELDING INSPECTED PER P.G. & E. GAS STANDARD D-40
BY: _____ INSPECTOR

NO.	DATE	DESCRIPTION	GM/SPEC	DWN.	CHKD.	SUPV.	APVD. BY

REVISIONS

NO.	DATE	DESCRIPTION	GM/SPEC	DWN.	CHKD.	SUPV.	APVD. BY

REVISIONS

APPROVED BY

JN GM14151810
SUPV. G.D.W.
DSGN. R.D.G.
DWN. R.D.G.
CHKD. D.L.H.
O.K.
DATE 04/14/95
SCALES 1" = 50'

REPLACE GAS MAIN

INSTALL 907' - 2" PL HP MAIN
MYRAN AVE. & TOTTEN AVE.
STOCKTON DIV. - CITY OF STOCKTON
PACIFIC GAS AND ELECTRIC COMPANY
SAN FRANCISCO, CALIFORNIA

BILL OF MATL
DWG LIST TOTTEN
SUPSDS
SUPSD BY
SHEET NO. SHEETS
07316903070 REV.