



COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: PS-1601363
Date Issued: 05/13/2016
Start Date: 05/13/2016
Exp. Date: 06/01/2016
Project No: PWP730079
Quad: SE

UE/CR/PM NO:A00CGX9

ENCROACHMENT PERMIT

To: AT & T - FRESNO
5555 E. OLIVE RM#300III
FRESNO, CA 93727

Encroachment Type:

TCP			
-----	--	--	--

Location:

E/S HARLAN RD@ROTH RD

In compliance with your request of 05/13/2016, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD

FORMS:	SS/WW, R-29		
--------	-------------	--	--

Est. Permit Fee: \$436.00

KRIS BALAJI, Director
Department of Public Works

WHITE -Permittee
GOLDENROD -PWD Central File
YELLOW -Field Inspection
PINK -Permit Section

By: TU
Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1.

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:
STREETS AND HIGHWAYS CODE
 1. Division 1, Chapter 3
 2. Division 2, Chapter 2, Section 942
 3. Division 2, Chapter 4, Section 1126
 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

A00CGX9

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 04/07/2016

To: San Joaquin County
Department of Public Works

AT&T / Sherry Parks (Permits Desk)
(Applicant Name)

5555 E. Olive Ave

(Mailing Address)

Fresno, CA 93727

(City, State, Zip Code)

(559) 454-4900 g26977@att.com

(Area Code - Telephone Number)

OFFICE USE ONLY

JOB # 730079 REF #

APN CR #

EXP. DATE 6-1-16

VALID 5-13-16 TO 6-1-16

STREET Harlan Rd

AREA Lathrop QUAD SE

TYPE TCP

FORMS SS WR

NOTES

DRIVEWAYS:

*

*

*

Sketch (Detailed plans may be submitted)

Please see the attached drawings for A00CGX9

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the E side of Harlan Rd approximately 0 feet/mile Feet of Roth Rd, by performing the following work (description of work):
Traffic control plan is in place for access to manhole #2499

Work will commence on or about 05/10/16-05/24/16 for approximately 2 days


I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

Sherry Parks - Administrator
Signature of Applicant - Title


4-11-2016
Date

SS&C	DATE
at&t	4-6-16

MANHOLE 2499

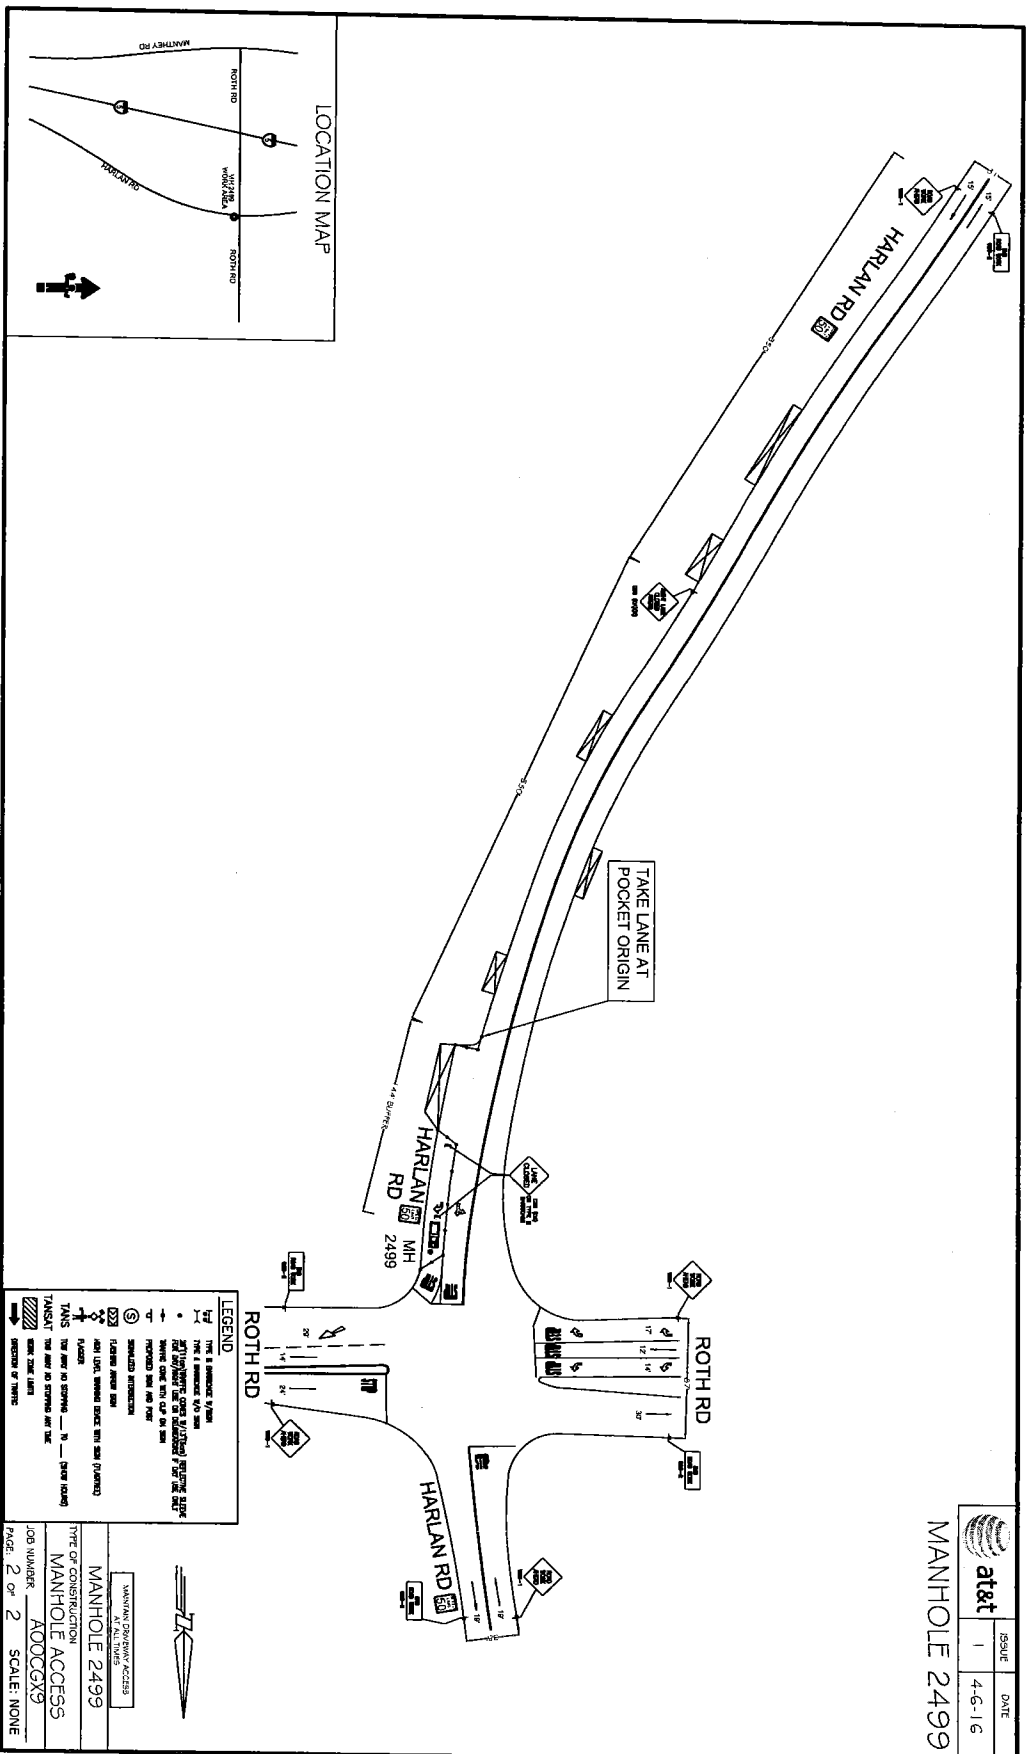

LOCATION MAP



LEGEND

	1/2 MILE
	1/4 MILE
	1/8 MILE
	1/16 MILE
	1/32 MILE
	1/64 MILE
	1/128 MILE
	1/256 MILE
	1/512 MILE
	1/1024 MILE
	1/2048 MILE
	1/4096 MILE
	1/8192 MILE
	1/16384 MILE
	1/32768 MILE
	1/65536 MILE
	1/131072 MILE
	1/262144 MILE
	1/524288 MILE
	1/1048576 MILE
	1/2097152 MILE
	1/4194304 MILE
	1/8388608 MILE
	1/16777216 MILE
	1/33554432 MILE
	1/67108864 MILE
	1/134217728 MILE
	1/268435456 MILE
	1/536870912 MILE
	1/1073741824 MILE
	1/2147483648 MILE
	1/4294967296 MILE
	1/8589934592 MILE
	1/17179869184 MILE
	1/34359738368 MILE
	1/68719476736 MILE
	1/137438953472 MILE
	1/274877906944 MILE
	1/549755813888 MILE
	1/1099511627776 MILE
	1/2199023255552 MILE
	1/4398046511104 MILE
	1/8796093022208 MILE
	1/17592186044416 MILE
	1/35184372088832 MILE
	1/70368744177664 MILE
	1/140737488355328 MILE
	1/281474976710656 MILE
	1/562949953421312 MILE
	1/1125899906842624 MILE
	1/2251799813685248 MILE
	1/4503599627370496 MILE
	1/9007199254740992 MILE
	1/18014398509481984 MILE
	1/36028797018963968 MILE
	1/72057594037927936 MILE
	1/144115188075855872 MILE
	1/288230376151711744 MILE
	1/576460752303423488 MILE
	1/1152921504606846976 MILE
	1/2305843009213693952 MILE
	1/4611686018427387904 MILE
	1/9223372036854775808 MILE
	1/18446744073709551616 MILE
	1/36893488147419103232 MILE
	1/73786976294838206464 MILE
	1/147573952589676412928 MILE
	1/295147905179352825856 MILE
	1/590295810358705651712 MILE
	1/1180591620717411303424 MILE
	1/2361183241434822606848 MILE
	1/4722366482869645213696 MILE
	1/9444732965739290427392 MILE
	1/18889465931478580854784 MILE
	1/37778931862957161709568 MILE
	1/75557863725914323419136 MILE
	1/151115727451828646838272 MILE
	1/302231454903657293676544 MILE
	1/604462909807314587353088 MILE
	1/1208925819614629174706176 MILE
	1/2417851639229258349412352 MILE
	1/4835703278458516698824704 MILE
	1/9671406556917033397649408 MILE
	1/19342813113834066795298816 MILE
	1/38685626227668133590597632 MILE
	1/77371252455336267181195264 MILE
	1/154742504910672534362390528 MILE
	1/309485009821345068724781056 MILE
	1/618970019642690137449562112 MILE
	1/1237940039285380274899124224 MILE
	1/2475880078570760549798248448 MILE
	1/4951760157141521099596496896 MILE
	1/9903520314283042199192993792 MILE
	1/19807040628566084398385987584 MILE
	1/39614081257132168796771975168 MILE
	1/79228162514264337593543950336 MILE
	1/158456325028528675187087900672 MILE
	1/316912650057057350374175801344 MILE
	1/633825300114114700748351602688 MILE
	1/1267650600228229401496703205376 MILE
	1/2535301200456458802993406410752 MILE
	1/5070602400912917605986812821504 MILE
	1/10141204801825835211973625643008 MILE
	1/20282409603651670423947251286016 MILE
	1/40564819207303340847894502572032 MILE
	1/81129638414606681695789005144064 MILE
	1/162259276829213363391578010288128 MILE
	1/324518553658426726783156020576256 MILE
	1/649037107316853453566312041152512 MILE
	1/1298074214633706907132624082305024 MILE
	1/2596148429267413814265248164610048 MILE
	1/5192296858534827628530496329220096 MILE
	1/10384593717069655257060992658440192 MILE
	1/20769187434139310514121985316880384 MILE
	1/41538374868278621028243970633760768 MILE
	1/83076749736557242056487941267521536 MILE
	1/166153499473114484112975882535043072 MILE
	1/332306998946228968225951765070086144 MILE
	1/664613997892457936451903530140172288 MILE
	1/1329227995784915872903807060280344576 MILE
	1/2658455991569831745807614120560689152 MILE
	1/5316911983139663491615228241121378304 MILE
	1/10633823966279326983230456482242756608 MILE
	1/21267647932558653966460912964485513216 MILE
	1/42535295865117307932921825928971026432 MILE
	1/85070591730234615865843651857942052864 MILE
	1/170141183460469231731687303715884105728 MILE
	1/340282366920938463463374607431768211456 MILE
	1/680564733841876926926749214863536422912 MILE
	1/1361129467683753853853498429727072845824 MILE
	1/2722258935367507707706996859454145691648 MILE
	1/5444517870735015415413993718908291383296 MILE
	1/10889035741470030830827987437816582766592 MILE
	1/21778071482940061661655974875633165533184 MILE
	1/43556142965880123323311949751266331066368 MILE
	1/87112285931760246646623899502532662132736 MILE
	1/174224571863520493293247799005065324265472 MILE
	1/348449143727040986586495598010130648530944 MILE
	1/696898287454081973172991196020261297061888 MILE
	1/1393796574908163946345982392040522594123776 MILE
	1/2787593149816327892691964784081045188247552 MILE
	1/5575186299632655785383929568162090376495104 MILE
	1/11150372599265311570767859136324180752990208 MILE
	1/22300745198530623141535718272648361505980416 MILE
	1/44601490397061246283071436545296723011960832 MILE
	1/89202980794122492566142873090593446023921664 MILE
	1/178405961588244985132285746181186892047843328 MILE
	1/356811923176489970264571492362373784095686656 MILE
	1/713623846352979940529142984724747568191373312 MILE
	1/1427247692705959881058285969449495136382746624 MILE
	1/2854495385411919762116571938898990272765493248 MILE

GENERAL PROVISIONS

GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

PUBLIC CONVENIENCE AND SAFETY:

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
 - 1. Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
 - 2. In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.
 - a. The County of San Joaquin Public Works Department
 - b. The County of San Joaquin Sheriff's Office
 - c. The local postal service
 - d. The local fire district
 - e. The local school district
 - f. The local residents involved
- B. Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- C. Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- D. Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and Transportation Officials (AASHTO) designations.
 - 1. For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M 170M.
 - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class III.
 - 3. Plastic pipe conforming to AASHTO Designation M294.
- B. All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1.06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- C. Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- D. All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- E. The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be installed.
- F. All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- A. All excavations shall be backfilled and compacted immediately after work therein has been completed.
- B. Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the Engineer.
- C. Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- D. Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one-foot where 90% compaction is required, and two-feet where 80% compaction is required.
- E. No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- F. Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- G. All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- H. All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
 - 1. Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch (1/2) maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
 - 2. Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- I. Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
 - 1. If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
 - 2. Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- J. Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

SPECIAL PROVISIONS

Winter Weather Utility Work

1. **SUPERVISION:** The utility company (permittee) shall furnish full-time supervision of all work to insure compliance with the permit provision.
2. **START OF WORK:** No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
3. **CLEAN PAVEMENT:** Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
5. **WEATHER-TIGHT CONDITIONS:** All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.