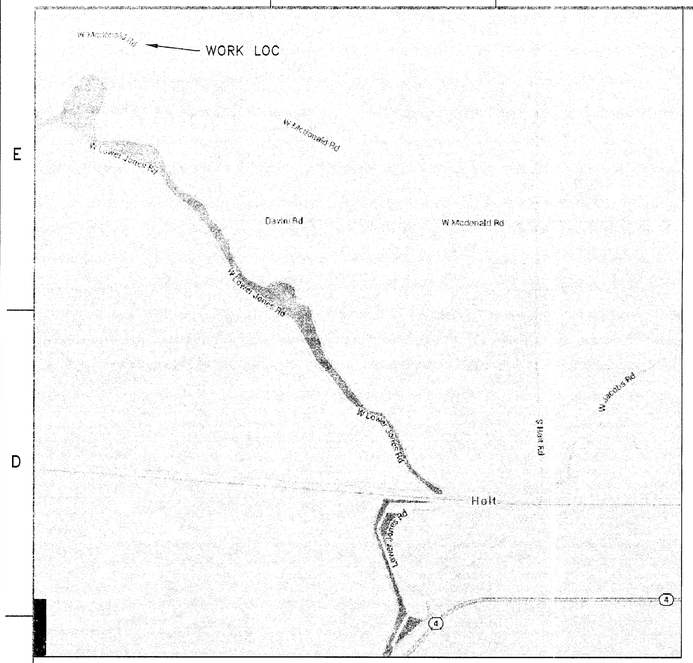

FOREMAN NOTE:
CALL LINDA OR DON @ 209-986-1744
OR 209-986-0554 BEFORE ARRIVING
TO LOCK UP DOGS.

LIGHT LOADING
LRA FIRE AREA
RAPTOR AREA
VOLTAGE AREA 2
NON CORROSIVE AREA
SURGE DISTRICT 3
INSULATION DIST B
SAN JOAQUIN CO
BLOCK MAP U06
CIR. MAP 3A41
SSD: SW 541, CIR BRK
FEEDER: MIDDLE RIVER 1102

REPACE 390' 3-4BC & 1306' 3-6BC
WITH 1696' 3-4/0AA 12KV. 9

8
COORDINATE #
317 2203 53591
LOADING DISTRICT
SI
TX SIZE - 15
KVA 1Ø - 12
KVA 3Ø -
% L.F. - 28

45'cL4 @ 37.96729 -121.46563
INSTALL 3/8" DWN GUY 10M SWAMP 15'L REPLACE LEANING TX.

45'cL5 @ 37.96725 -121.46494 PT 4717-14185 SET & SOLD 1950
D0729 PT NOT ATTACHED.

GATE CODE 1959

399

Twentyone Mile Cut

REPLACE CORRODED ANCHOR
WITH 7/16"DWN GUY
10M SWAMP 25'LEAD

W MCDONALD RD

BOULTON RD

PVT RD

1
REPLACE 45'/50'CL4 FULL TREATED. SET MIN 9' DEEP @ 37.96976 -121.46117
INSTALL 2-5/16 DWN GUYS. 10M SWAMP 15'L

2
50'cl2 @ 37.96954 -121.46173 PT4717-14184 SET & SOLD 1950 10-4-3 GRADE
INSTALL 50'CL4 FULL TREATED. PER PG150132XT-1. SET MIN 9' DEEP.
INSTALL 5/16" DWN GUY & 10M SWAMP 4'LEAD.

3
50'cL2 @ 37.96872 -121.46239 PG000289XT-1 SET & SOLD 2001 21' GRADE

4
50'cL2 @ 37.96823 -121.46306 PT13873-2 SET & SOLD 1994 21' GRADE

5
40'cL2 @ 37.96770 -121.46368 PT1629-1 SET & SOLD 1963 22' GRADE
1476 INSTALL 50'CL3 FULL TREATED. SET MIN 10' DEEP. PER PG150132XT-2. REPLACE 400A/900A BYPASS SWITCH.
TRANSFER SR 11476 & PT SVC DROP. ASSIGN DISC# 784351 TO MAINTENANCE DISCONNECT. PT44HSB/PT57HSB

6
50'cL2 @ 37.96720 -121.46432 PT1056-1 SET & SOLD 1962 24' GRADE
REPLACE ANCHOR WITH 2-3/8"DWN GUYS 20M 15' LEAD

7

COUNTY PERMIT DETAIL
SCALE NONE

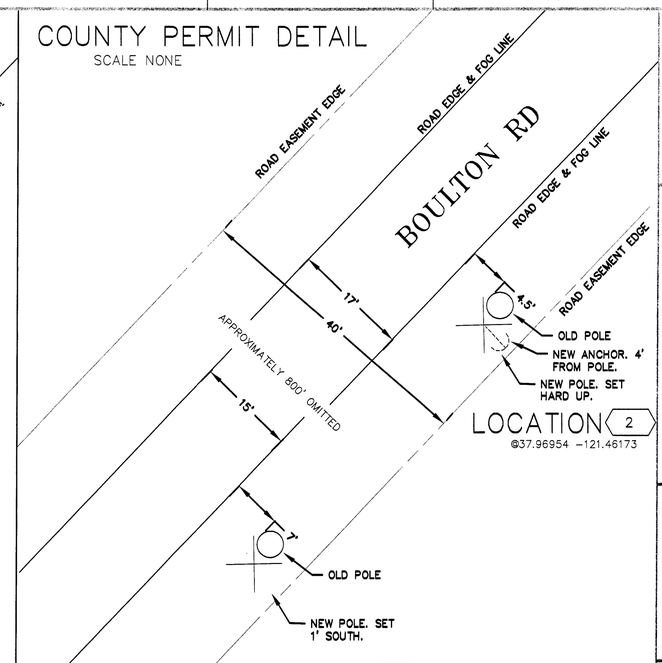

Underground Service Alert
CALL BEFORE YOU DIG
Call: TOLL FREE
811
TWO WORKING DAYS BEFORE YOU DIG

NO APPARENT PG&E GAS CONFLICTS FOR THIS PROJECT
GAS PLATS: Map# NONE

FIRE AREA NON-EXEMPT EQUIPMENT STAMP
Identify the Subject Pole Fire Area District (per Doc. #072148 and Utility Bulletin TD-23018-004):
☐ FRA ☐ SRA ☒ LRA
☐ OWF ☐ UWF
Per the Power Line Fire Prevention Field Guide, the equipment being installed is:
☒ Exempt ☐ Non-Exempt ☐ N/A
☐ If installing Non-Exempt Equipment in a Fire Area, verify in SAP that the the CN-25 has been activated.
By: David Uhlich, DDU1 5/11/15
Signature, Name [Corp ID], Date

PROJECT CONDITIONS STAMP
Type(s) of Work:
☐ New Business
☒ PG&E Maintenance & Construction
Project Conditions:
☐ NONE APPARENT (if project design changes, contact ADE)
or
☒ CONDITIONS APPLY:
☐ PERMITS ☐ TAILBOARD ☐ OTHER
(Provide additional information on line below)
BY: David Uhlich, DDU1 5/11/15
SIGNATURE, NAME, [CORPORATE ID], DATE

CO:
SD:
NOTIF.: 108134789
Other:
SHT: 1 OF 1
SHEETS
REV.
PM: 31076536

ENGINEERING AND PLANNING DEPT.
850 STILLWATER RD
WEST SACRAMENTO
PHONE #:
FAX #:
PACIFIC GAS AND ELECTRIC COMPANY

EST: DDU1 916-760-5305
ADE: SLS 916-760-5311
SUPV: CKM7 916-760-1954
REP: JVE 209-742-1641
PLNR: SZC1 209-742-1405
SCALE: 1"=100'
DATE: 5/18/15

NO.	DATE	DESCRIPTION	ORDER #	DWN	CHKD	SUPV	APVD BY

REVISIONS

PG&E
MIDDLE RIVER 1102RECONDUCTOR
MCDONALD & BOULTON RD
STOCKTON

0 INCH 1