



# COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS  
P.O. BOX 1810-1810 E. HAZELTON AVENUE  
STOCKTON, CALIFORNIA 95201  
(209) 468-3000  
FAX # (209) 468-9324

Permit No: **PS-1501504**  
Date Issued: 06/05/2015  
Start Date: 06/08/2015  
Exp. Date: 08/01/2015  
Project No: PWP730052  
Quad: SE

UE/CR/PM NO:PM:31103050

## ENCROACHMENT PERMIT

To: PACIFIC GAS & ELECTRIC - FRESNO  
P.O. BOX 3031  
FRESNO, CA 93720

### Encroachment Type:

POLE REPLACEMENT	Bore (over 12 inch Dia)		
------------------	-------------------------	--	--

### Location:

N/S OF CARTER RD. 0.5 MILES E/O ESCALON BELLOTA RD. AND AT THE W/S OF THE INTERSECTION OF ESCALON BELLOTA RD. AND GAWNE RD.

In compliance with your request of **06/05/2015**, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

### Special Comments:

Traffic Control Per MUTCD

FORMS: 

SS/WW, R-29		
-------------	--	--

Est. Permit Fee: \$1,861.00

MIKE SELLING, Deputy Director  
Department of Public Works

- WHITE -Permittee
- GOLDENROD -PWD Central File
- YELLOW -Field Inspection
- PINK -Permit Section

By:   
Permit Section

## ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:

### STREETS AND HIGHWAYS CODE

1. Division 1, Chapter 3
2. Division 2, Chapter 2, Section 942
3. Division 2, Chapter 4, Section 1126
4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

PM 31103050  
Notif 108596031

### APPLICATION FOR ENCROACHMENT PERMIT

**PLEASE PRINT:**

Date 2/23/15

To: San Joaquin County  
Department of Public Works

Chris Hester - PG+E  
(Applicant Name)

8 River Park Place East  
(Mailing Address)

Fresno, CA 93720  
(City, State, Zip Code)

(559) 347-5293  
(Area Code - Telephone Number)

OFFICE USE ONLY	
JOB #	<u>PWP-73062-5</u> REF # _____
APN	_____ CR # _____
EXP. DATE	<u>8-1-2015</u>
VALID	<u>6-8-2015 TO 8-1-2015</u> DRIVEWAYS: _____
STREET	<u>Carter Rd. Escalon Bellota Rd.</u>
AREA	<u>Escalon</u> QUAD <u>SE</u>
TYPE	<u>Pole Replacement</u>
FORMS	<u>SS/WW, R29</u>
NOTES	_____
	_____
	_____
	_____

Sketch (Detailed plans may be submitted)

( Please See Attached Sketch )

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the North side of Carter Road approximately .5 feet/mile East of Escalon - Bellota Road, Escalon, by performing the following work (description of work):

This is for a PG+E Power Pole Replacement

Work will commence on or about \_\_\_\_\_ for approximately \_\_\_\_\_ days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

[Signature]  
Signature of Applicant - Title Estimator

2/23/15  
Date

REC'D & RECD  
[Signature]

PM 3103050  
Notif 108596002

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 2/23/15

To: San Joaquin County  
Department of Public Works

Chris Hester - PG+E  
(Applicant Name)

8 River Park Place East  
(Mailing Address)

Fresno, CA 93720  
(City, State, Zip Code)

(559) 347-5293  
(Area Code - Telephone Number)

OFFICE USE ONLY	
JOB #	<u>PWP-230825</u> REF # _____
APN	_____ CR # _____
EXP. DATE	<u>8-1-2015</u>
VALID	<u>6-8-2015</u> TO <u>8-1-2015</u> DRIVEWAYS: _____
STREET	<u>Cornor Rd + Escalon Belmont</u>
AREA	<u>Escalon QUAD SE</u>
TYPE	<u>Pole Replacement</u>
FORMS	<u>SYW 1/12/29</u>
NOTES	_____
	_____
	_____
	_____

Sketch (Detailed plans may be submitted)

( Please see attached sketch )

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the southwest side of Cornor Rd + Escalon Belmont approximately \_\_\_\_\_ feet/mile of \_\_\_\_\_, Escalon, by performing the following work (description of work):

This is for a PG+E Power Pole Replacement


Work will commence on or about \_\_\_\_\_ for approximately \_\_\_\_\_ days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

[Signature] Estimator  
Signature of Applicant - Title

2/23/15  
Date

[Signature]

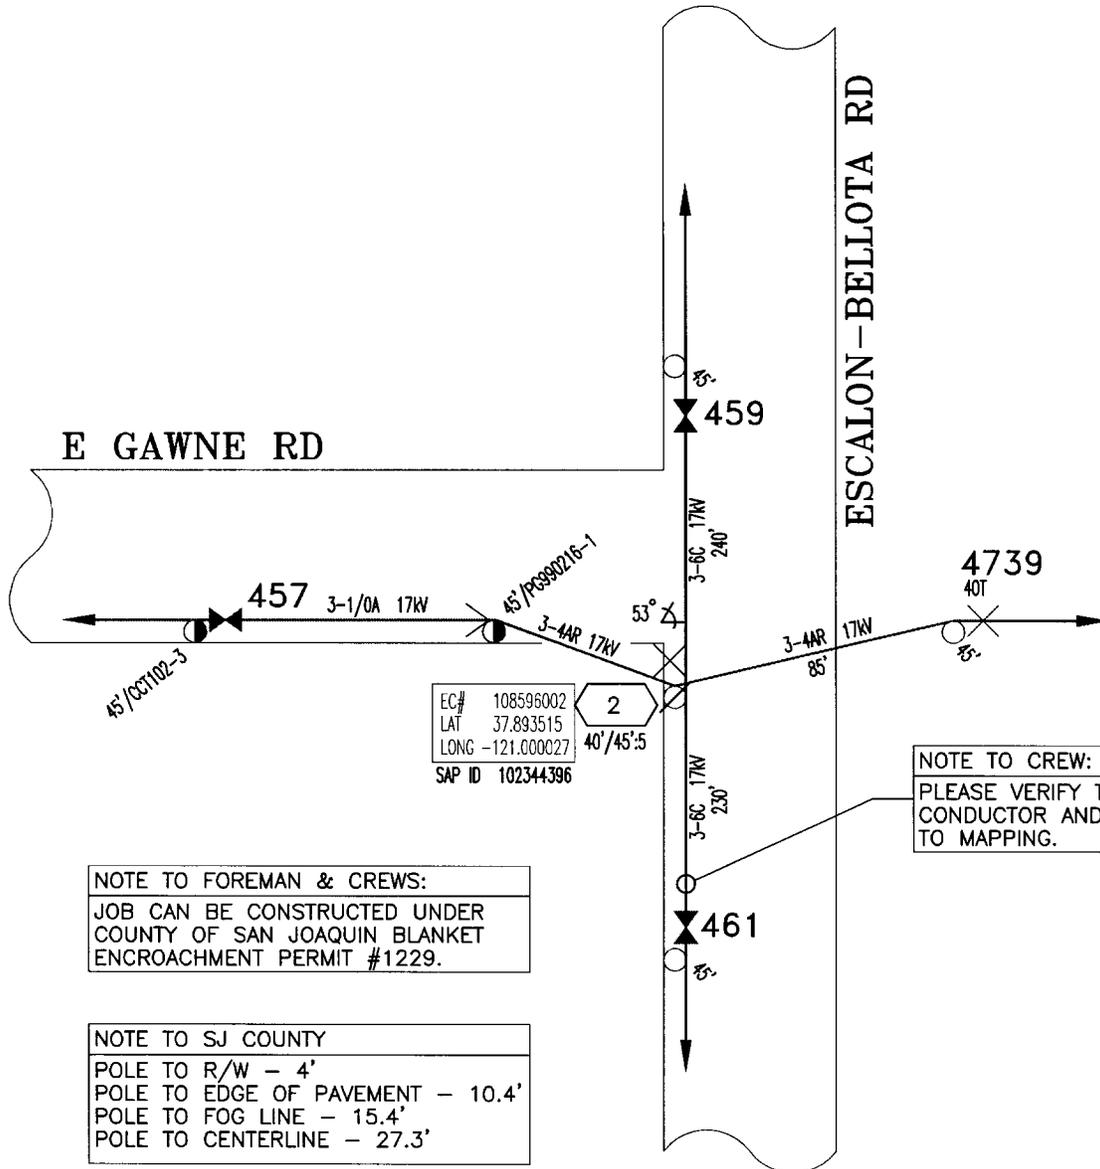

**NOTE TO FOREMAN & CREWS:**  
 JOB CAN BE CONSTRUCTED UNDER  
 COUNTY OF SAN JOAQUIN BLANKET  
 ENCROACHMENT PERMIT #1229.

**NOTE TO SJ COUNTY**  
 POLE TO R/W - 4'  
 POLE TO EDGE OF PAVEMENT - 10.4'  
 POLE TO FOG LINE - 15.4'  
 POLE TO CENTERLINE - 27.3'

**NOTE TO CREW:**  
 PLEASE VERIFY THE SIZE OF  
 CONDUCTOR AND REPORT  
 TO MAPPING.

**17kV**  
 PLAT: W18  
 SSD: SWITCH 457  
 CKT: AVENA 1702  
 DESIGN VOLT: 17kV  
 INSL DIST: D  
 LOADING AREA: LIGHT  
 CORR AREA: NON  
 ARRESTOR DIST: 3  
 RAPTOR FRAMING: YES

**PROJECT CONDITIONS STAMP**

Type(s) of Work:  
 New Business  
 PG&E Maintenance & Construction

Project Conditions:  
 NONE APPARENT (if project design changes, contact ADE)  
 or  
 CONDITIONS APPLY:  
 PERMITS     TAILBOARD     OTHER  
 (Provide additional information on line below)

BY: CHRIS HESTER [C4H5] 1/1/15  
SIGNATURE, NAME, [CORPORATE ID], DATE

**UNDERGROUND SERVICE ALERT**  
 CALL: TOLL FREE  
**811**  
 TWO WORKING DAYS  
 BEFORE YOU DIG




EST:	C. HESTER	559.347.5293
ADE:	K. MALAMPHY	559.347.5276
SUPV:	T. COPELAND	559.960.1359
REP:	D. TALENT	209.726.5592
PLNR:	A. BARRON	209.842.6442
SCALE:	N.T.S.	DATE: 1/1/15

**POLE REPLACEMENT**  
 1 ON/ 2E GAWNE RD & ESCALON BELLOTA  
 ESCALON, CA 95320  
 PACIFIC GAS AND ELECTRIC COMPANY

JP#	N/A
REV:	0
SHEET:	2 OF 4
NOTIF:	109237737
PM:	31103050



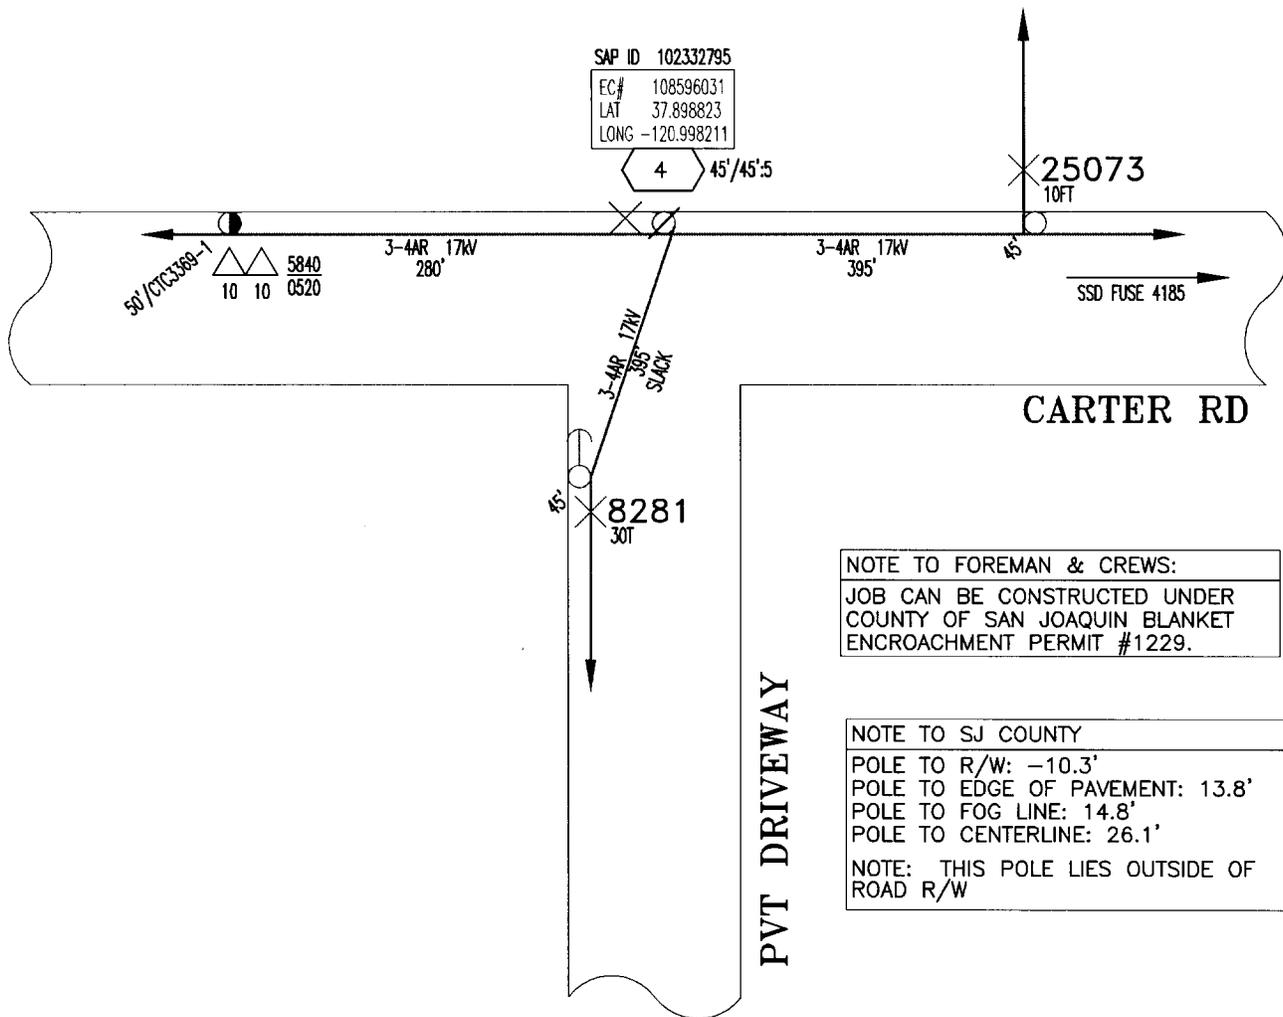

**NOTE TO FOREMAN & CREWS:**  
 JOB CAN BE CONSTRUCTED UNDER  
 COUNTY OF SAN JOAQUIN BLANKET  
 ENCROACHMENT PERMIT #1229.

**NOTE TO SJ COUNTY**  
 POLE TO R/W: -10.3'  
 POLE TO EDGE OF PAVEMENT: 13.8'  
 POLE TO FOG LINE: 14.8'  
 POLE TO CENTERLINE: 26.1'  
 NOTE: THIS POLE LIES OUTSIDE OF  
 ROAD R/W

**UNDERGROUND SERVICE ALERT**



CALL: TOLL FREE  
**811**  
 TWO WORKING DAYS  
 BEFORE YOU DIG



**17kV**  
 PLAT: W18  
 SSD: FUSE 4185  
 CKT: RIVERBANK 1711  
 DESIGN VOLT: 17kV  
 INSL DIST: D  
 LOADING AREA: LIGHT  
 CORR AREA: NON  
 ARRESTOR DIST: 3  
 RAPTOR FRAMING: YES

**PROJECT CONDITIONS STAMP**

Type(s) of Work:  
 New Business  
 PG&E Maintenance & Construction

Project Conditions:  
 NONE APPARENT (if project design changes, contact ADE)  
 or  
 CONDITIONS APPLY:  
 PERMITS     TAILBOARD     OTHER  
 (Provide additional information on line below)

by: CHRIS HESTER [C4H5] 1/1/15  
 SIGNATURE, NAME, [CORPORATE ID], DATE



EST:	C. HESTER	559.347.5293
ADE:	K. MALAMPHY	559.347.5276
SUPV:	T. COPELAND	559.960.1359
REP:	D. TALENT	209.726.5592
PLNR:	S. CHEN	209.842.1406
SCALE:	N.T.S.	DATE: 1/1/15

**POLE REPLACEMENT**  
 AF MB 26250 CARTER RD  
 ESCALON, CA 95320  
 PACIFIC GAS AND ELECTRIC COMPANY

JP#	N/A
REV:	0
SHEET:	4 OF 4
NOTIF:	109237737
PM:	31103050



## **CLOSURE STIPULATIONS AND REQUIREMENTS THAT MUST BE FOLLOWED AT ALL TIMES DRIVEWAY ACCESS SHALL REMAIN OPEN OR ACCESSIBLE AT ALL TIMES**

- All lane closures shall meet or exceed CA MUTCD 2014 specifications as well as conform to hours of work set forth by the County.
- All areas of work when encroaching upon sidewalk access OR pedestrian safety shall have the latest CA MUTCD 2014 Edition, Temporary Traffic Control, sidewalk closure detail in place to ensure pedestrian and public safety.
- Pedestrian traffic shall at all time have a minimum 4 feet wide area of travel.
- All open excavation areas shall be backfilled or trench plated prior to public usage.
- All closures set forth in this TCP are the minimum allowed on project, field conditions may change requiring further traffic safety devices or traffic control person to ensure safety of traveling public, pedestrians as well as work forces.
- All changes to ensure safety will be made immediately to ensure a safe environment for all parties.
- All traffic control devices, vehicles and personnel must be suited for the purpose intended as well as meet or exceed latest CA MUTCD 2014 Edition, Temporary Traffic Control requirements as well as County requirements.
- All Devices shall be removed when no longer required.
- All flaggers shall be certified and all intersections shall be flagged when required as shown on plans.
- If work is done at night or encroaches on the hours of darkness all road work ahead signs shall have a flashing beacon, light towers will be used for flaggers and work areas and all other latest CA MUTCD 2014 Edition, Temporary Traffic Control requirements shall be met or exceeded as well.
- **NOT TO SCALE—SPACING OF SIGNS, TAPER AND TANGENTS WILL BE SPACED AS PER TABLE HAS SET FORTH AS GOVERNED BY TRAVEL SPEEDS.**
- All traffic devices shall meet or exceed latest CA MUTCD 2014 Edition, Temporary Traffic Control. All signs shall be high intensity night time reflective, 48"x48" roll up signs. All signs shall have a minimum of 2, 18" day time flags attached to sign stands during day time hours and if applicable flashing 12", 12v beacons for night time work.
- Sign stands shall meet latest CA MUTCD 2014 Edition, Temporary Traffic Control, as well as allowing for 18" to 7' height for signs and spring equipped for windy conditions.
- All hours of work shall be dictated by the County specified lane closure charts or as directed by the County Inspector.
- Vehicle path of travel shall never be less than 12' in width. Closures and excavation not to exceed what forces expect to excavate per the daily shift.
- Roadway shall not be opened until safe for public use. All open trenches must be plated or backfilled prior to public usage.
- All areas of excavation must have a valid USA dig tag with corresponding dig ticket number. Proof must be carried with the excavating forces at all times.