



COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: PS-1600714
Date Issued: 03/16/2016
Start Date: 03/16/2016
Exp. Date: 04/15/2016
Project No: PWP730079
Quad: NW
Extended To: 07/15/2016
UE/CR/PM NO:A008V01

ENCROACHMENT PERMIT

To: AT & T - FRESNO
5555 E. OLIVE RM#300III
FRESNO, CA 93727

Encroachment Type:

Bore (over 12 inch Dia)			
-------------------------	--	--	--

Location:

HWY 99 FRONTAGE N/O MORADA LN

In compliance with your request of **03/16/2016**, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD

FORMS: SS/WW, R-29

Est. Permit Fee: \$1,050.00

KRIS BALAJI, Director
Department of Public Works

WHITE -Permittee
GOLDENROD -PWD Central File
YELLOW -Field Inspection
PINK -Permit Section

By: 
Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1.

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:
STREETS AND HIGHWAYS CODE
 1. Division 1, Chapter 3
 2. Division 2, Chapter 2, Section 942
 3. Division 2, Chapter 4, Section 1126
 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.



COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: **PS-1600714**
Date Issued: 03/16/2016
Start Date: 03/16/2016
Exp. Date: 04/15/2016
Project No: PWP730079
Quad: NW

UE/CR/PM NO:A008V01

ENCROACHMENT PERMIT

To: AT & T - FRESNO
5555 E. OLIVE RM#300III
FRESNO, CA 93727

Encroachment Type:

Bore (over 12 inch Dia)			
-------------------------	--	--	--

Location:

HWY 99 FRONTAGE N/O MORADA LN

In compliance with your request of **03/16/2016**, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD

FORMS: SS/WW, R-29

Est. Permit Fee: \$1,050.00

KRIS BALAJI, Director
Department of Public Works

WHITE -Permittee
GOLDENROD -PWD Central File
YELLOW -Field Inspection
PINK -Permit Section

By: 
Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:

STREETS AND HIGHWAYS CODE

1. Division 1, Chapter 3
2. Division 2, Chapter 2, Section 942
3. Division 2, Chapter 4, Section 1126
4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date _____

To: San Joaquin County
Department of Public Works
ATT (SHERRY PARKS)

(Applicant Name)

5555 E OLIVE AVE

(Mailing Address)

FRESNO CA 93727

(City, State, Zip Code)

559-454-4900

(Area Code - Telephone Number)

OFFICE USE ONLY

JOB # 730079 REF # _____
APN _____ CR # _____
EXP. DATE 4-15-16
VALID 3-16-16 TO 4-15-16
STREET N St Rt 99 Fronty Rd
AREA Morada QUAD NW
TYPE Bore
FORMS SS W W
NOTES _____

DRIVEWAYS:

Sketch (Detailed plans may be submitted)

THIS PORTION OF THIS JOB (ATT A008V01) REQUIRES A SAN JOAQUIN COUNTY PERMIT TO PLACE 2-1"X8' SPIRAL ANCHORS AT 2 LOCATIONS AND 1-30'-4 WOOD POLE AT 1 LOCATION. ALL LOCATIONS ARE E/O NORTHBOUND N 99 FRONTAGE RD N/O E MORADA LN. SEE DRAWINGS ATTACHED. PLEASE CALL ATT ENGINEER JOHN KOZINA (209-474-4254) WITH ANY QUESTIONS.

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the _____ side of _____ approximately _____ feet/mile _____ of _____ by performing the following work (description of work):

**ALL LOCATIONS ARE E/O NORTHBOUND N 99 FRONTAGE RD N/O E MORADA LN.
SEE DRAWINGS ATTACHED. PLEASE CALL ATT ENGINEER JOHN KOZINA
(209-474-4254) WITH ANY QUESTIONS.**

Work will commence on or about 02/15/2016 for approximately 30 days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

Signature of Applicant - Title

Date

SAN JOAQUIN COUNTY PERMIT



ISSUE	DATE
1	1/2016



VICINITY MAP, SAN JOAQUIN COUNTY (NEAR MORADA)

THIS PORTION OF THIS JOB (ATT A008V01) REQUIRES A SAN JOAQUIN COUNTY PERMIT TO PLACE 2-1/2"XB" SPIRAL ANCHORS AT 2 LOCATIONS AND 1-30'-4 WOOD POLE AT 1 LOCATION. ALL LOCATIONS ARE E/O NORTHBOUND N 99 FRONTAGE RD N/O E MORADA LN. SEE DRAWINGS ATTACHED. PLEASE CALL ATT ENGINEER JOHN KOZINA (209-474-4254) WITH ANY QUESTIONS.




A Fujikura Business
THIS WORK WAS DRAWN BY MIKE GIBSON (559-298-4966) OF AFL NETWORK SERVICES UNDER CONTRACT TO AT&T. FOR QUESTIONS AND ASSISTANCE ON THIS JOB PLEASE CALL ENGINEER AS NOTED IN TITLE BOX.

GEO/CO	UE66
EXCH.	STKNCA12
ENGR.	JOHN KOZINA TEL 209-474-4154
ENGR ARC	VOKDEEG00
TYPE OF CONST.	SAN JOAQUIN COUNTY PERMIT
EST. NO.	A008V01
DWG.	1 OF 5 P504

SAN JOAQUIN COUNTY PERMIT

LOC 1 PL ANC


at&t	ISSUE	DATE
	1	1/2016

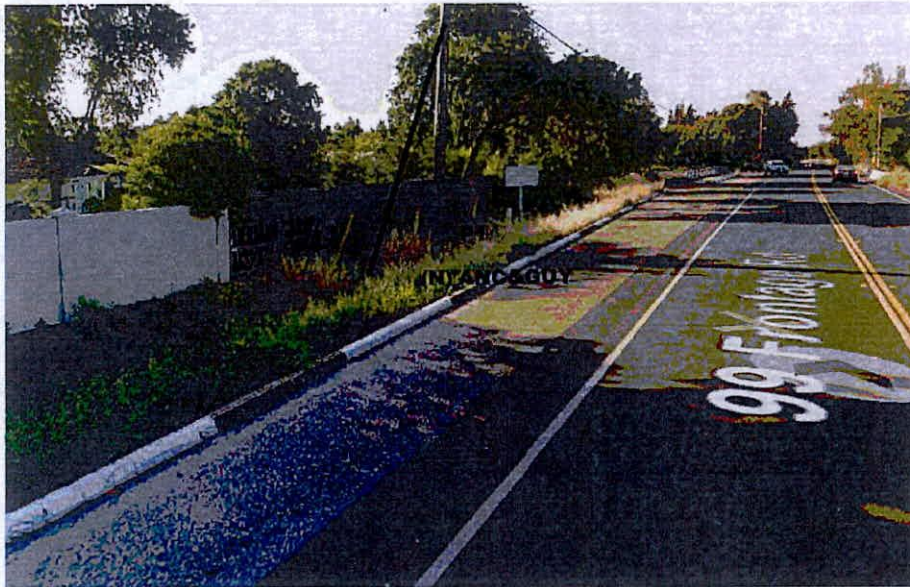

LOC 1 P1 LOOKING SOUTH

CALL **USA** TOLL FREE
48 HRS PRIOR TO DIGGING
FOR ALL SUBSTRUCTURE
LOCATIONS
800-227-2600 or 811

AT&T ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THE SUBSTRUCTURE INFORMATION HEREIN PROVIDED. THE USER ASSUMES RESPONSIBILITY FOR VERIFYING SUBSTRUCTURE LOCATIONS BEFORE EXCAVATING AND ASSUMES ALL LIABILITY FOR DAMAGE TO TELEPHONE FACILITIES AS A RESULT OF SUCH EXCAVATION. CALL UNDERGROUND SERVICE ALERT ON: (800) 227-2600 TWO DAYS BEFORE DIGGING IN PROXIMITY TO TELEPHONE PLANT.

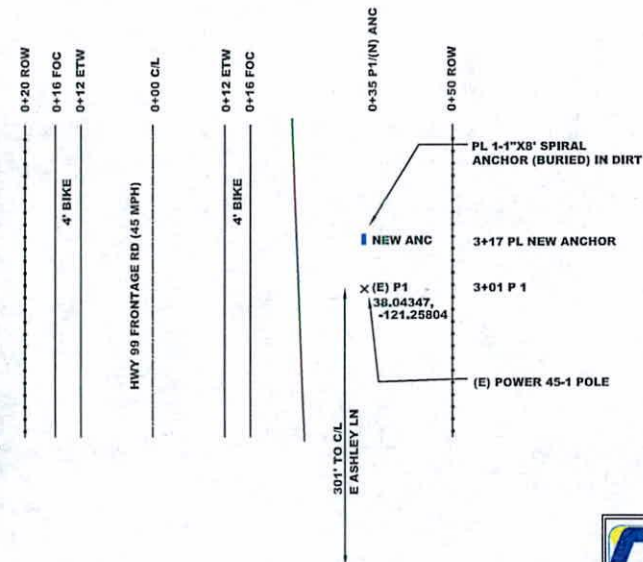

PERMIT LEGEND

	BORE PIT
	SPL BOX
	STREETLIGHT
	TRAFFIC LIGHT (STANDALONE)
	MONUMENT
	FIRE HYDRANT
	JOINT POLE
	MANHOLE
	ROAD SIGN
	BOLLARD
	FENCELINE
	TREE
	HEDGE
	BOW BACK OF WALK
	CPC TYPE C PVC
	C/L CENTERLINE
	C/O CENTER OF CSW
	CSW SIDEWALK
	DW DRIVEWAY
	EOD EDGE OF DRIVEWAY
	EOP EDGE OF PAVEMENT
	ETW EDGE OF TRAVELED WAY
	FOC FACE OF CURB
	ROW RIGHT OF WAY

AFL Network Services
A Fujikura Business
THIS WORK WAS DRAWN BY MIKE GIBSON (559-298-4956) OF AFL NETWORK SERVICES UNDER CONTRACT TO AT&T. FOR QUESTIONS AND ASSISTANCE ON THIS JOB PLEASE CALL ENGINEER AS NOTED IN TITLE BOX.

0+00 E ASHLEY C/L



GEO/CO	UE68
EXCH.	STKNCA12
ENGR. JOHN KOZINA TEL	209-474-4154
ENGR ARC	V0KDEEG00
TYPE OF CONST.	SAN JOAQUIN COUNTY PERMIT
EST. NO.	A008V01
DWG.	2 OF 5 P504

STOCKTON PERMIT

LOC 2 PL NEW POLE, ANC

0+00 MIRADA PL



ISSUE	DATE
1	1/2016



LOC 2 NEW POLE/ANC LOOKING SOUTH

0+30 ROW

0+16 FOC

0+12 ETW

0+00 C/L

0+12 ETW

0+16 FOC

0+28 NEW POLE/ANC

0+50 ROW

4' BIKE

HWY 99 FRONTAGE RD (45 MPH)

4' BIKE

PL 30-4 ATT POLE, DOUG FIR @5' DEPTH IN DIRT

NEW POLE 38.0395,-121.25780

NEW ANC 5+30 NEW ANC

PL 1-1"x8" SPIRAL ANCHOR (BURIED) IN DIRT

(E) P7

6+15 P 7

(E) POWER 50-3 POLE

PERMIT LEGEND

	BORE PIT
	SPL BOX
	STREETLIGHT
	TRAFFIC LIGHT (STANDALONE)
	MONUMENT
	FIRE HYDRANT
	JOINT POLE
	MANHOLE
	ROAD SIGN
	BOLLARD
	FENCELINE
	TREE
	HEDGE
	BOW
	TYPE C PVC
	CENTERLINE
	CENTER OF
	SIDEWALK
	DRIVEWAY
	EDGE OF DRIVEWAY
	EDGE OF PAVEMENT
	EDGE OF TRAVELED WAY
	FACE OF CURB
	RIGHT OF WAY

CALL **USA** TOLL FREE
48 HRS PRIOR TO DIGGING
FOR ALL SUBSTRUCTURE
LOCATIONS
800-227-2600 or 811

AT&T ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THE SUBSTRUCTURE INFORMATION HEREIN PROVIDED. THE USER ASSUMES RESPONSIBILITY FOR VERIFYING SUBSTRUCTURE LOCATIONS BEFORE EXCAVATING AND ASSUMES ALL LIABILITY FOR DAMAGE TO TELEPHONE FACILITIES AS A RESULT OF SUCH EXCAVATION. CALL UNDERGROUND SERVICE ALERT ON: (800) 227-2600 TWO DAYS BEFORE DIGGING IN PROXIMITY TO TELEPHONE PLANT.

AFL Network Services

A Fujikura Business

THIS WORK WAS DRAWN BY MIKE GIBSON (559-298-4966) OF AFL NETWORK SERVICES UNDER CONTRACT TO AT&T. FOR QUESTIONS AND ASSISTANCE ON THIS JOB PLEASE CALL ENGINEER AS NOTED IN TITLE BOX.

GEO/CO _____ UE66

EXCH. _____ STKNCA12

ENGR. JOHN KOZINA TEL 209-474-4154

ENGR ARC _____ VOKDEEG00

TYPE OF CONST. _____ STOCKTON PERMIT

EST. NO. _____ A008V01

DWG. 3 OF 5 P504

SAN JOAQUIN COUNTY PERMIT/TCP


LOC 1 PL ANC



ISSUE	DATE
1	1/2016

TCP LEGEND

- TYPE III BARRICADE W518 (5H x 4W)
- TYPE II BARRICADE W518 (3H x 2W)
- TEMPORARY ADA RAMP
- INTERLOCKING LONGITUDINAL CHANNELIZING DEVICE
- TRAFFIC CONE WITH CLIP ON SIGN
- SIGN
- FAS - FLASHING ARROW BOARD
- HIGH LEVEL WARNING DEVICE WITH SIGN (FLAG TREE)
- FLAGGER
- TANS TOW AWAY NO STOPPING (SHOW HOURS)
- TANSAT TOW AWAY NO STOPPING ANY TIME
- WORK ZONE LIMITS
- DIRECTION OF TRAFFIC
- EOP EDGE OF PAVEMENT
- BOS BACK OF SIDEWALK
- ETW EDGE OF TRAVELED WAY
- ROADWAY SPEED LIMIT WITHIN WORK ZONE
- CHANNELIZING DEVICE

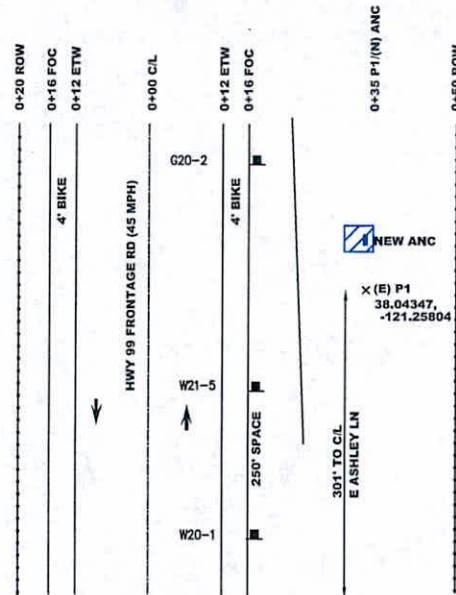

CONSTRUCTION NOTE:
PARK ALL VEHICLES OFF
THE ROAD, IN DIRT
DO NOT BLOCK
DRIVEWAYS

3+17 PL NEW ANCHOR

3+01 P 1

X (E) P1
38.04347,
-121.25804

0+00 E ASHLY C/L

POSTED SPEED LIMIT (mph)	TAPER LENGTH L (ft)	DELINEATOR SPACING		SIGN SPACING S ADVANCE OF TAPER & BETWEEN SIGNS (ft)
		TAPER (ft)	TANGENT (ft)	
25 MPH (40)	125 FT. (40)	25 FT. (8)	50 FT. (15)	100 FT. (40)
30 MPH (45)	160 FT. (55)	30 FT. (9)	60 FT. (18)	250 FT. (60)
35 MPH (50)	245 FT. (75)	35 FT. (11)	70 FT. (21)	250 FT. (75)
40 MPH (60)	320 FT. (100)	40 FT. (12)	80 FT. (24)	250 FT. (105)
* 45 MPH (70)	540 FT. (165)	45 FT. (14)	90 FT. (27)	350 FT. (170)
* 50 MPH (80)	800 FT. (185)	50 FT. (15)	100 FT. (30)	350 FT. (185)
* 55+MPH (85)	1000 FT. (305)	50 FT. (15)	100 FT. (30)	1000 FT. (305)

ROAD TYPE	ADVANCE WARNING SIGN SPACING		
	A 1st sign to 2nd sign	B 2nd sign to 3rd sign	C 3rd sign to point of restriction
URBAN (LOW SPEED) 25 mph or less	100	100	100
URBAN (HIGH SPEED) 26 mph to 40 mph	250	250	250
URBAN (HIGH SPEED) 40 mph or more	350	350	350
RURAL	500	500	500
55 mph or more	1000	1,500	2,640

All distances listed in feet

TRAFFIC CONTROL CHART

SPEED	MINIMUM TAPER LENGTH FOR WIDTH OF STREET (ft)				MAXIMUM DELINEATOR SPACING	
	MERGING	SHIFTING	SHOULDER	CORN STREAM	TAPER	TANGENT
20 MPH	80	40	27	100	20	40
25 MPH	125	63	42	100	25	50
30 MPH	180	90	60	100	30	60
35 MPH	245	123	82	100	35	70
40 MPH	320	160	107	100	40	80
45 MPH	540	270	180	100	45	90
50 MPH	600	300	200	100	50	100
55 MPH	660	330	220	100	55	110
60 MPH	720	360	240	100	60	120
65 MPH	780	390	260	100	65	130
70 MPH	840	420	280	100	70	140

AFL Network Services
A Fujikura Business
THIS WORK WAS DRAWN BY MIKE GIBSON (559-298-4966) OF AFL NETWORK SERVICES UNDER CONTRACT TO AT&T. FOR QUESTIONS AND ASSISTANCE ON THIS JOB PLEASE CALL ENGINEER AS NOTED IN TITLE BOX.

GEO/CO _____ UE66
EXCH. _____ STKNCA12
ENGR. JOHN KOZINA TEL 209-474-4154
ENGR ARC _____ VOKDEEG00
TYPE OF CONST. _____
SAN JOAQUIN COUNTY PERMIT
EST. NO. _____ A008V01
DWG. 4 OF 5 P504

SAN JOAQUIN COUNTY PERMIT/TCP

LOC 2 PL NEW POLE, ANC

0+00 MIRADA PL



ISSUE	DATE
1	1/2016

TCP LEGEND

- TYPE III BARRICADE W/ SIGN (5H x 4W)
- TYPE II BARRICADE W/ SIGN (3H x 2W)
- TEMPORARY ADA RAMP
- INTERLOCKING LONGITUDINAL CHANNELIZING DEVICE
- TRAFFIC CONE WITH CLIP ON SIGN
- SIGN
- FAS - FLASHING ARROW BOARD
- HIGH LEVEL WARNING DEVICE WITH SIGN (FLAG TREE)
- FLAGGER
- TANS TOW AWAY NO STOPPING (to show hours)
- TANSAT TOW AWAY NO STOPPING ANY TIME
- WORK ZONE LIMITS
- DIRECTION OF TRAFFIC
- EDGE OF PAVEMENT
- BACK OF SIDEWALK
- ETW EDGE OF TRAVELED WAY
- ROADWAY SPEED LIMIT WITHIN WORK ZONE
- CHANNELIZING DEVICE

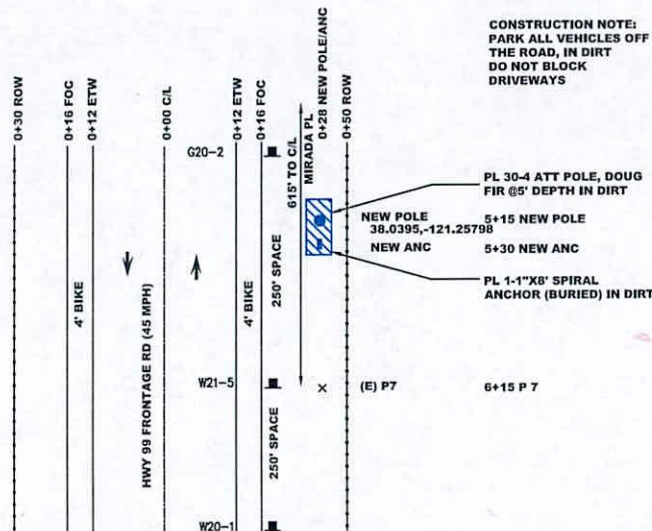


TABLE A						
MINIMUM RECOMMENDED DELINEATOR/CONE & SIGN PLACEMENT						
POSTED SPEED LIMIT	TAPER LENGTH L	DELINEATOR SPACING			SIGN SPACING S ADVANCE OF TAPER & BETWEEN SIGNS	
		TAPER	TANGENT			
(Kmh)	(m)	(m)	(m)	(m)		
25 MPH (40)	125 FT. (40)	25 FT. (8)	50 FT. (15)	100 FT. (45)		
30 MPH (45)	180 FT. (55)	30 FT. (9)	60 FT. (18)	250 FT. (60)		
35 MPH (50)	245 FT. (75)	35 FT. (11)	70 FT. (21)	250 FT. (75)		
40 MPH (60)	320 FT. (100)	40 FT. (12)	80 FT. (24)	250 FT. (105)		
* 45 MPH (70)	540 FT. (165)	45 FT. (14)	90 FT. (27)	350 FT. (170)		
* 50 MPH (80)	600 FT. (185)	50 FT. (15)	100 FT. (30)	350 FT. (185)		
* 55+ MPH (85)	1000 FT. (305)	50 FT. (15)	100 FT. (30)	1000 FT. (305)		

TRAFFIC CONTROL CHART

SPEED	MINIMUM TAPER LENGTH FOR MOVING OF TRAFFIC (ft)				MAXIMUM DELINEATOR SPACING	
	MERGING	SHIFTING	SHOULDER	DOWN STREAM	TAPER	TANGENT
20 MPH	80	40	27	100	20	40
25 MPH	125	63	42	100	25	50
30 MPH	180	90	60	100	30	60
35 MPH	245	123	82	100	35	70
40 MPH	320	160	107	100	40	80
45 MPH	540	270	180	100	45	90
50 MPH	600	300	200	100	50	100
55 MPH	660	330	220	100	55	110
60 MPH	720	360	240	100	60	120
65 MPH	780	390	260	100	65	130
70 MPH	840	420	280	100	70	140

ADVANCE WARNING SIGN SPACING

ROAD TYPE	DISTANCE BETWEEN SIGNS		
	1st sign to 2nd sign	2nd sign to 3rd sign	3rd sign to point of restriction
URBAN (LOW SPEED) 25 mph or less	100	100	100
URBAN (HIGH SPEED) 26 mph to 40 mph	250	250	250
URBAN (HIGH SPEED) 40 mph or more	350	350	350
RURAL	500	500	500
55 mph or more	1000	1,500	2,840

All distances listed in feet

AFL Network Services

A Fujikura Business

THIS WORK WAS DRAWN BY MIKE GIBSON (559-298-4956) OF AFL NETWORK SERVICES UNDER CONTRACT TO AT&T. FOR QUESTIONS AND ASSISTANCE ON THIS JOB PLEASE CALL ENGINEER AS NOTED IN TITLE BOX.

GEO/CO _____ UE66 _____

EXCH. _____ STKNCA12 _____


ENGR. JOHN KOZINA TEL. 209-474-4154 _____

ENGR ARC _____ VOKDEEG00 _____

TYPE OF CONST. _____ STOCKTON PERMIT _____


EST. NO. _____ A008V01 _____

DWG. 5 OF 5 P504 _____

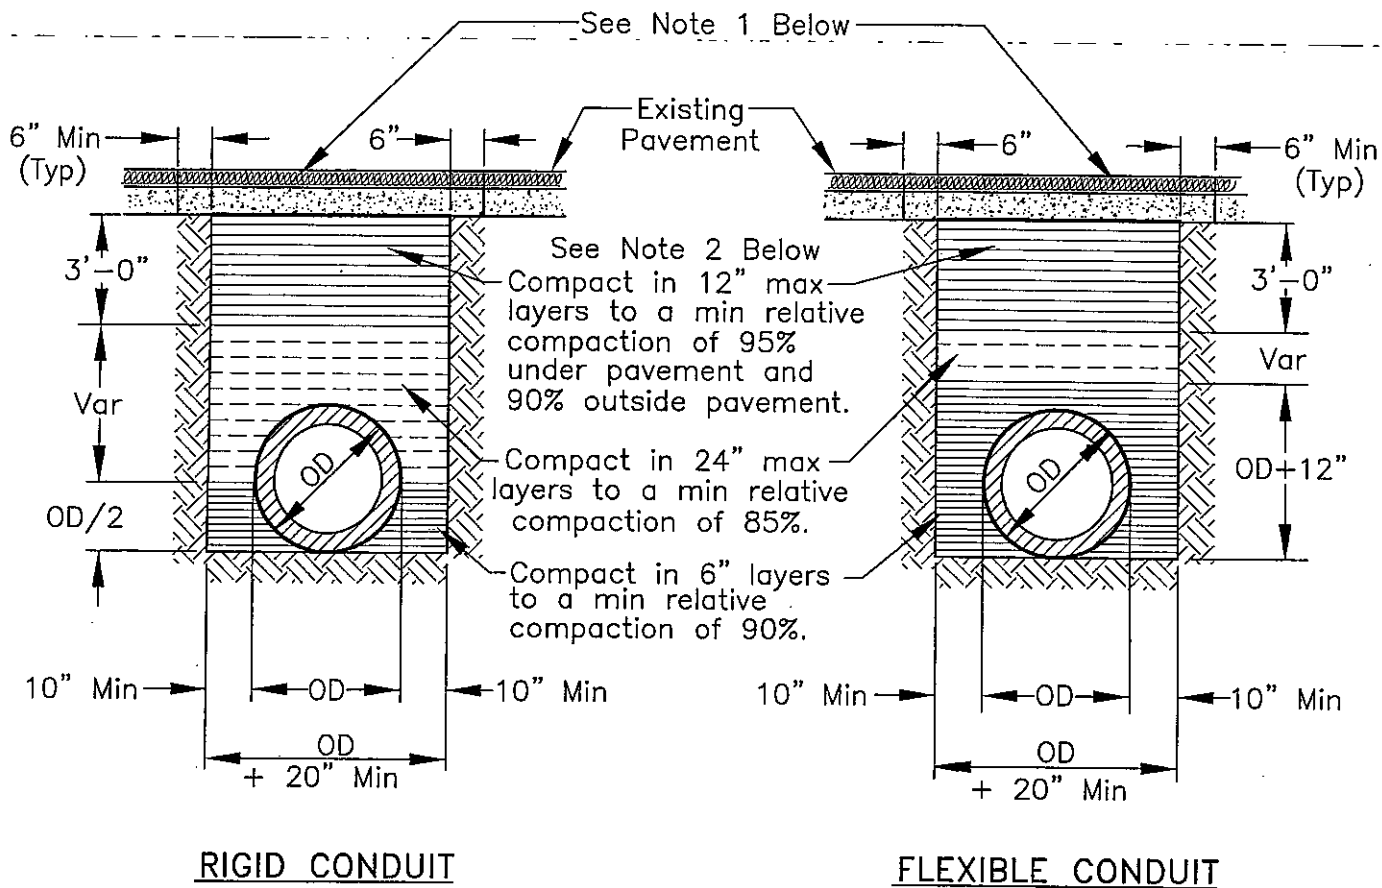

NOTES:

1. New pavement shall be 1" thicker than existing pavement, minimum of 0.25 Ft. New base shall be 1" thicker than existing base, min of 0.50 Ft.
2. Select native material or imported granular material as approved by the Director of Public Works. Backfill with materials equal to or better than the existing pavement and base in quality.
3. Relative compaction of materials shall be tested in accordance with the State of California, Dept. of Transportation Testing Manuals, test method No. California 216 or 231.
4. All existing pavement shall be neatly cut to line prior to trench excavation.
5. Jetting or ponding will be permitted within the street right-of-way with a 3 year bond, when approved by the Director of Public Works.
6. When shown by soil composition and compactability, ninety percent (90%) compaction may be used, when approved by the Director of Public Works.
7. Special bedding and backfill requirements may be shown on the plans or specified in the special provisions.

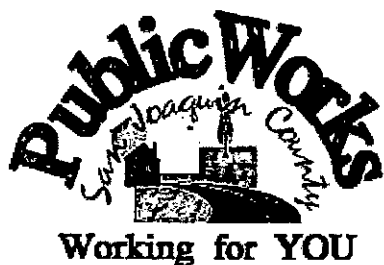

TYPICAL TRENCH BACKFILL

COUNTY OF SAN JOAQUIN
DEPARTMENT OF PUBLIC WORKS

Approved by:

No.	Revision	Description	Date

Date: DEC 2014

Std. Dwg. No.

R-29

GENERAL PROVISIONS

GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

PUBLIC CONVENIENCE AND SAFETY:

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
 - 1. Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
 - 2. In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.
 - a. The County of San Joaquin Public Works Department
 - b. The County of San Joaquin Sheriff's Office
 - c. The local postal service
 - d. The local fire district
 - e. The local school district
 - f. The local residents involved
- B. Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- C. Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- D. Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and Transportation Officials (AASHTO) designations.
 - 1. For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M 170M.
 - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class III.
 - 3. Plastic pipe conforming to AASHTO Designation M294.
- B. All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1.06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- C. Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- D. All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- E. The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be installed.
- F. All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- A. All excavations shall be backfilled and compacted immediately after work therein has been completed.
- B. Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the Engineer.
- C. Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- D. Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one-foot where 90% compaction is required, and two-feet where 80% compaction is required.
- E. No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- F. Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- G. All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- H. All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
 - 1. Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch (1/2") maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
 - 2. Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- I. Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
 - 1. If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
 - 2. Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- J. Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

SPECIAL PROVISIONS

Winter Weather Utility Work

1. **SUPERVISION:** The utility company (permittee) shall furnish full-time supervision of all work to insure compliance with the permit provision.
2. **START OF WORK:** No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
3. **CLEAN PAVEMENT:** Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
5. **WEATHER-TIGHT CONDITIONS:** All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.