

# **COUNTY OF SAN JOAQUIN**

#### DEPARTMENT OF PUBLIC WORKS

P.O. BOX 1810-1810 E. HAZELTON AVENUE STOCKTON, CALIFORNIA 95201 (209) 468-3000 FAX # (209) 468-9324

Permit No: PS-1802316 Date Issued: 06/22/2018 Start Date: 06/22/2018 Exp. Date: 08/01/2018 Project No: PWP730052

Ouad: SE

UE/CR/PM NO:31389914

# ENCROACHMENT PERMIT

To: PACIFIC GAS & ELECTRIC - STOCKTON

PO BOX 930

STOCKTON, CA 95201

En	cro	ac	hm	ent	Tv	ne:
	CI U	all.	TAXAL	CHIL	1.7	De.

Transformer Replacement			
i i ransiormer kenjacemeni			
	Annual Control of the		

#### Location:

S/S OF WYMAN RD. 644' E/O MCKINLEY AVE.

In compliance with your request of 06/22/2018, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Traffic Con	trol Per MUTCD*	****See Attache	ed "Special Condition	ns"****	
FORMS:	SS/WW				18 TO 18

Est. Permit Fee: \$436.00

WHITE -Permittee GOLDENROD -PWD Central File YELLOW -Field Inspection PINK -Permit Section

KRIS BALAJI, Director Department of Public Works

## ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

- 1. This permit is issued under and subject to all laws and ordinances of agencies-governing the encroachment herein permitted. See the following references:
  - STREETS AND HIGHWAYS CODE
  - 1. Division 1, Chapter 3
  - 2. Division 2, Chapter 2, Section 942
  - 3. Division 2, Chapter 4, Section 1126
  - 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

- 2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
- 3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
- 4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure-placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
- 5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
- 6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
- 7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
- 8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
- 9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
- 10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
- 11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
- 12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
- 13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

## SPECIAL CONDITIONS FOR PG&E – PM# 31389914 ENCROACHMENT PERMIT


- 1. Maintain traffic controls for all roads. Traffic control delays shall not exceed 15 minutes. Two-way traffic shall be maintained during non-working hours with excavated areas backfilled or plated. During working hours, two-way traffic control shall be maintained with one lane open and appropriate flaggers.
- 2. Access to all properties shall be maintained at all times except when work is occurring at the access point. Minimal delays will be allowed to provide access within the work zone area. Driveway access shall be fully restored at the end of each workday. Driveways disturbed by the contractor shall be replaced with in-kind or better materials.
- 3. Residents and businesses shall be notified in writing, as approved by the County, 48 hours in advance of any impacts to their access.
- 4. Any areas where parking is to be restricted shall have signs noting the restrictions in place at least 48 hours in advance.
- 5. School Buses shall be passed through the work zone with minimal delays.
- 6. All destroyed or obliterated pavement markings must be replaced in kind by the permittee. Typical pavement markings include but not limited to lane lines, centerlines, stop and stop ahead legends, limit lines, raised pavement markers and miscellaneous delineators.
- 7. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 8. All future maintenance of the pipeline and related facilities within the County right-of-way will require a San Joaquin County Encroachment Permit.
- 9. County roads shall be kept clean from mud and debris at all times along the access points and work zone areas during entire project. All standard roadway striping and signage shall be clearly visible, maintained and restored throughout the construction zone during and after the project.
- 10. In addition to standard dust control measures, streets shall be maintained in a clean condition, free of dirt, mud and debris during construction activities. The contractor shall provide daily, and as determined to be necessary by County inspectors, street sweeping using a modern mechanical or vacuum-assisted street sweeper.
- 11. The contractor shall not conduct construction operations in rain or heavy fog conditions.

# APPLICATION FOR ENCROACHMENT PERMIT

## PLEASE PRINT:

Data	 6/5/2018	Ţ	OFFICE U	CE ONI V	
Date	3,0,20,1		OFFICE U	SE UNL1	
To:	San Joaquin County	JOB#	73052-6	REF#	
-	Department of Public Works	APN EXP. DATE	8/1/18	CR#	
	PG&E PM 31389914	VALID		9/1/18	DRIVEWAYS:
	(Applicant Name)	STREËT AREA	Wyman Rd Erench CampUAD		*
	4040 West Lane	TYPE	Transformer Re		*
	(Mailing Address)	FORMS NOTES	55/WW		
	Stockton, CA 95204	NOILS	· · · · · · · · · · · · · · · · · · ·		
	(City, State, Zip Code)				
	(209) 470 - 2300				
	(Area Code - Telephone Number)				
	s6pz@pge.com (Email Address)				
	etch (Detailed plans may be submitted)	1			
The unc	Crew to call SJ County Inspector at (209 When calling, crew shall request "rain <b>Novembe</b> dersigned hereby applies for permission to excavate,	clearance" or through t	for any work during <b>March</b>	g winter mon	ths
	on the SOUTH side of Wyman Rd by performing the follo ce overhead transformer	, approximatel	y 644' EAST of Mckinley		ay rught of rugh
10/only 141	commones on or offer C10/0040		for approximately	20	dors
AAOLK MII	commence on or after6/8/2018	1	for approximately	30	days.
work des	dersigned, certify that I am the owner of the respective cribed above in accordance with the rules and regulate the control of the respective and regulate the control of the respective and regulate the control of the rules and regulate the control of the rules and regulate the control of the rules and regulate the control of the respective and respective the control of the respective and respective the control of the respective and regulate the rules are rules are rules and regulate the rules are rules a	ions of San Jo	paquin County and subje	ect to inspection a	

Y:1FORMS & TEMPLATESIENCROACHMENT PERMIT APPLICATION.doc (08/08)

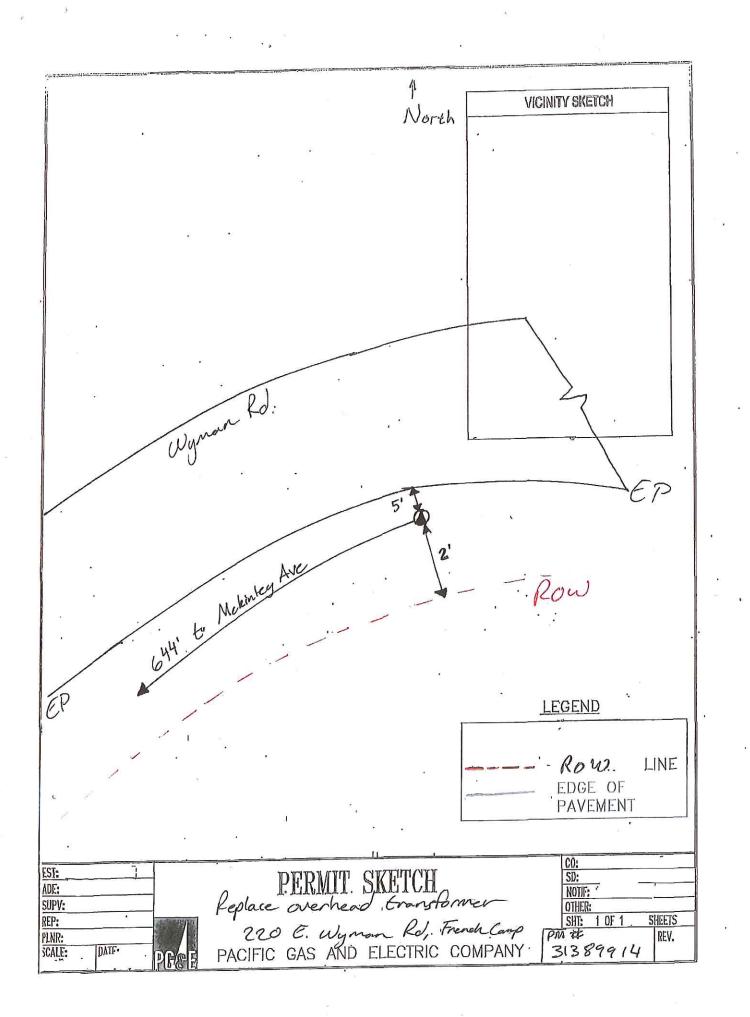


Same   Dimension   Dimension				TEMPORARY TRAFFIC		CONTROL PLAN DIMENSION GUIDELINES	N GUDELINES	-	
Ft         ft         ft           100         125         65           250         245         125           250         245         125           350         540         270           350         600         330           500         720         360           500         720         360           500         720         360           500         720         360           600         720         360           600         720         360           780         780         390           8utfer speed or observed operating speed (whichever is good theres speed speed or observed operating speed which speed urban areas and be inserted in low-speed urban areas and the Stopping Sight Distance should enable Road Users to Sign specing in rural areas should be 500 ft.	SPEED MPH (2)	Dimension A/B/C ADVANCE WARNING SIGN SPACING (5)	Dimension L MERGING TAPER LENGTH	Dimension L/2 SRIFTING TAPER LENGTH	Dimension L/3 MINIMUM SHOULDER TAPER	Dimension "E" ER SPACE and and GGER STA DPPING SI( 6.3%)		BRAZINUM CNAWRELIZER TANGENT SPACING (3)	MAXIMUM CHANNELIZER CONFLICT SPACING (6)
100         125         65           250         180         90           250         245         125           250         320         160           350         600         300           500         720         360           500         720         360           500         780         390           Work on Freeways and Expressways shall meet the Caltrar           Posted Speed or observed operating speed (whichever is good than elizer spacing shall be reduced by half at areas when the space may be inserted in low-speed urban areas and the Space may be inserted in low-speed urban areas and sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	FDF	L.	#	4	#	1	42		
250 180 90 125 125 125 125 1250 320 160 300 300 300 300 300 330 1500 660 330 330 300 300 300 300 300 300 3	25	100	125	65	45	(160)		8	12
250         245         125           250         320         160           350         540         270           350         600         300           500         720         360           500         780         390           Work on Freeways and Expressways shall meet the Cattrar         390           Posted Speed or observed operating speed (whichever is g           Chamnelizer spacing shall be reduced by half at areas where           Chamnelizer spacing shall be reduced by half at areas and           Buffer space may be inserted in low-speed urban areas and           The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	30	250	180	06	90	(202)		GG GG	ŕŪ
250         320         160           350         540         270           350         600         300           500         660         330           500         720         360           780         390         390           Work on Freeways and Expressways shall meet the Cattrar         Posted Speed or observed operating speed (whichever is good charmelizer spacing shall be reduced by half at areas where           Channelizer spacing shall be reduced by half at areas where         The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	35	250	245	125	85	(260)		2	17
350         540         270           350         600         300           500         720         360           500         780         390           Work on Freeways and Expressways shall meet the Caltrar           Posted Speed or Observed operating speed (whichever is g           Channelizer spacing shall be reduced by half at areas where           Buffer space may be inserted in low-speed urban areas and           Sign spacing in rural areas should enable Road Users to Sign spacing in rural areas should be 500 ft.	40	250	320	160	110	(315)		8	20
350     600     300       500     660     330       500     720     360       500     720     390       Work on Freeways and Expressways shall meet the Caltrar       Posted Speed or observed operating speed (whichever is good annelizer spacing shall be reduced by half at areas when Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	45	350	540	270	180	(380)		8	22
500 660 330 500 720 360 500 720 390 720 390 720 390 780 390 780 780 390 780 780 780 780 780 780 780 780 780 78	50	350	900	300	200	(450)		8	25
500 720 360  500 780 390  Work on Freeways and Expressways shall meet the Caltrar Posted Speed or observed operating speed (whichever is g Chamnelizer spacing shall be reduced by half at areas where Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	55	200	999	330	220	(520)		100	25
Work on Freeways and Expressways shall meet the Caltrar Posted Speed or observed operating speed (whichever is g Channelizer spacing shall be reduced by half at areas wher Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	09	200	720	360	240	(009)		8	25
Work on Freeways and Expressways shall meet the Caltrar Posted Speed or observed operating speed (whichever is g Channelizer spacing shall be reduced by half at areas wher Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	95	500	780	390	260	(685)		S	25
Posted Speed or observed operating speed (whichever is good charmelizer spacing shall be reduced by half at areas where Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	(1)	Work on Freeways	and Expressways	shall meet the Calt		ans and Standard Specif	ication requirements.		
Channelizer spacing shall be reduced by half at areas where Buffer space may be inserted in low-speed urban areas and The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	(2)	Posted Speed or o	bserved operating	speed (whichever is	s greater).			The state of the s	
	ତି	Channelizer spacin	ng shalf be reduced	d by half at areas wi	here work is taking	g place on curves or are	as of head-on conflict.	MANAGEMENT CONTRACTOR	
The Stopping Sight Distance should enable Road Users to Sign spacing in rural areas should be 500 ft.	(4-A)	Buffer space may L	oe inserted in low-s	speed urban areas	and should be inst	erted in high-speed urba	in and rural areas.		
	(4-B)	The Stopping Sight	1 Distance should e	enable Road Users		y Flagger Station and sa	ifely stop.		
	(9)	Sign spacing in run	al areas should be	500 ft.				And the second s	The state of the s
(B) "Table 6F-101(CA)	Đ.	* Table 6F-101(C/	4)					And the second s	

i

,

Figure 6H-10 (CA). Lane Closure on Two-Lane Road Using Flaggers (TA-10)

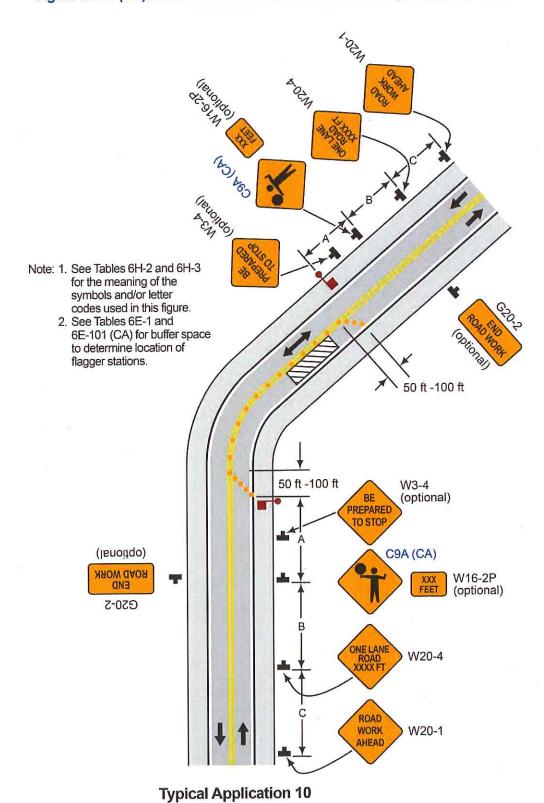

## GENERAL PROVISIONS

# GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

#### PUBLIC CONVENIENCE AND SAFETY:

- Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
  - Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
  - In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure. d.
    - The County of San Joaquin Public Works Department

The local fire district

The County of San Joaquin Sheriff's Office

The local school district e.

The local postal service

The local residents involved f.

- Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

## STRUCTURES:

- Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and transportation Officials (AASHTO) designations.
  - For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M
  - For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class 2. III.

Plastic pipe conforming to AASHTO Designation M294.

- All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1:06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be E.
- All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

## REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- All excavations shall be backfilled and compacted immediately after work therein has been completed.
- Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the B. Engineer.
- Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction C. throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail,
- Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one -foot where D. 90% compaction is required, and two-feet where 80% compaction is required.
- No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided. E.
- Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
  - Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch(1/2) maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
  - Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
  - If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
  - Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

# SPECIAL PROVISIONS

Winter Weather Utility Work

- 1. <u>SUPERVISION:</u> The utility company (**permittee**) shall furnish full-time supervision of all work to insure compliance with the permit provision.
- 2. <u>START OF WORK:</u> No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
- 3. <u>CLEAN PAVEMENT:</u> Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
- 4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
- 5. <u>WEATHER-TIGHT CONDITIONS:</u> All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.