

# **COUNTY OF SAN JOAQUIN**

DEPARTMENT OF PUBLIC WORKS

P.0. BOX 1810-1810 E. HAZELTON AVENUE STOCKTON, CALIFORNIA 95201 (209) 468-3000 FAX # (209) 468-9324 Permit No: PS-1900076
Date Issued: 01/09/2019
Start Date: 01/15/2019
Exp. Date: 05/15/2019
Project No: PWP730052

Quad: NS

UE/CR/PM NO:35047744

# **ENCROACHMENT PERMIT**

To: PACIFIC GAS & ELECTRIC - STOCKTON PO BOX 930 STOCKTON, CA 95201

<b>Encroachment T</b>	vne:

Bell Hole Trench

#### Location:

1451 FILBERT ST.; FILBERT ST. 65' S/O FRANCIS ST.

In compliance with your request of  $\underline{01/09/2019}$ , permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

## **Special Comments:**

WHITE

PINK

Traffic Control Per MUTCD\*\*\*\*\*See Attached "Special Conditions"\*\*\*\*

FORMS: SS/WW, R-29 Trench Cut Policy

Est. Permit Fee: \$665.50

-Permittee

GOLDENROD -PWD Central File
YELLOW -Field Inspection

-Permit Section

Permit Section

KRIS BALAJI, Director
Department of Public Works

# ENCROYCHMENT PERMIT GENERAL PROVISIONS

- following references: This permit is issued under and subject to all laws and ordinances of agencies-governing the encroachment herein permitted. See the
- STREETS AND HIGHWAYS CODE
- I. Division I, Chapter 3
- 2. Division 2, Chapter 2, Section 942
- 3. Division 2, Chapter 4, Section 1126
- 4. Division 2, Chapter 5.5 and Chapter 6
- ZAN 10AQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.
- Except as otherwise provided for public agenoies and franchise holders, this permit is revocable on five days notice. provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the
- shall leave the County Highway in a thoroughly neat, clean and usable condition. of the work keep the County Highway in as nest and clean condition as is possible and upon completion of the work authorized herein, All work shall be dene subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress
- by the County of San Joaquin. maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the The Permittee also agrees by the acceptance of this permit to properly mainfain any encrosebment structure-placed by the Permittee on any
- County Department of Public Works. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the
- at the sole expense of the Permittee. installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the
- No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of
- flagmen, as required by the particular work in progress. the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and within eight feet (8) of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked
- official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim. work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the The Permittee, by the acceptance of this permit, shall assume full responsibility for all Lability for personal injury or damage to property
- commencement of operations of placing the encroachment structure. possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed 10. All backfull material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director
- by the Permittee prior to starting work. 11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such suthority must be secured
- construction utilized. 12. The current and finture safety and convenience of the traveling public shall be given every consideration in the location and methods of
- by a Licensed Land Surveyor and another Comer Record filed with the County Surveyor. (Land Surveyors' Act Section 8771) Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be receitablished of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a 13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start
- 800-227-2600 forty-eight (48) hours in advance. 14. Prior to any excavation, the Permittee shall notify USA Morth (Underground Service Alert of Morthern California and Mevada) at 811 or

## SPECIAL CONDITIONS FOR PG&E – FILBERT ST. – PM# 35047744 ENCROACHMENT PERMIT

- Maintain traffic controls for all roads. Traffic control delays shall not exceed 15 minutes.
   Two-way traffic shall be maintained during non-working hours with excavated areas backfilled or plated. During working hours, two-way traffic control shall be maintained with one lane open and appropriate flaggers.
- 2. Access to all properties shall be maintained at all times except when work is occurring at the access point. Minimal delays will be allowed to provide access within the work zone area. Driveway access shall be fully restored at the end of each workday. Driveways disturbed by the contractor shall be replaced with in-kind or better materials.
- 3. Residents and businesses shall be notified in writing, as approved by the County, 48 hours in advance of any impacts to their access.
- 4. Any areas where parking is to be restricted shall have signs noting the restrictions in place at least 48 hours in advance.
- 5. School Buses shall be passed through the work zone with minimal delays.
- 6. Work shall not be permitted within the San Joaquin County right-of-way between November 1 and March 31 without prior authorization from the San Joaquin County Department of Public Works Field Engineering Division, contact them at 209-953-7421.
- 7. All destroyed or obliterated pavement markings must be replaced in kind by the permittee. Typical pavement markings include but not limited to lane lines, centerlines, stop and stop ahead legends, limit lines, raised pavement markers and miscellaneous delineators.
- 8. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 9. All pipe and pipeline related facilities including, but not limited to, valves, utility boxes and vaults, and frames and covers shall be maintained by PG&E, including any facilities that are abandoned in place. PG&E shall be responsible for any and all costs associated with the removal, relocation and/or adjustment of these facilities as determined by the County at PG&E's expense. (Streets and Highways Code Section 1463)
- 10. All future maintenance of the pipeline and related facilities within the County right-of-way will require a San Joaquin County Encroachment Permit.
- 11. Trenches/bell holes shall be maintained in a smooth and even condition to the satisfaction of the County throughout the project limits at all times.

#### Special Conditions for ENCROACHMENT PERMIT

- 12. All trenches/bell holes shall be completely backfilled or shored and plated at the end of each workday, and the roadway restored to two-way traffic. If plating is to be used, a trench shoring and plating plan suitable for traffic loadings shall be prepared by a registered civil engineer and submitted for prior approval by the County.
- 13. The contractor shall use San Joaquin County Improvement Standard R-29 when backfilling trenches/bell holes within the County right-of-way. Where the existing road structural section is below standard, a minimum section of 3 inches of asphalt concrete over 8 inches of aggregate base shall be required.
- 14. Filbert Street subject to pavement cuts shall receive a one-inch (1") asphalt concrete overlay as per San Joaquin County Department of Public Works Improvement Standards Section 2-5.0 Trench Cut Policy. Shoulder areas shall be brought up to the finish grade as directed by the County.
- 15. Final paving for trench repair or road resurfacing shall be per Caltrans' specifications and shall not occur between November 1 and March 31, without prior authorization from the San Joaquin County Department of Public Works Field Engineering Division, contact them at 209-953-7421.
- 16. No paving joints are allowed within paved shoulder; contractor shall pave all the way to outer edge of paved shoulder.
- 17. Class II Aggregate Base shoulder backing is required from the edge of pavement, a minimum of 4-inches thick by 4-feet wide.
- 18. Contractor shall establish existing roadway and drainage grades within the construction area. Any repair to roadways and adjacent areas shall match existing grades. Any proposed grade changes shall receive prior approval from County.
- 19. Above ground vaults, panels and/or other similar facilities will be allowed within the right-of-way if located as far to the outside edge as possible. Utility vaults shall be located a minimum of 4'-0" from edge of pavement.
- County roads shall be kept clean from mud and debris at all times along the access points and work zone areas during entire project. All standard roadway striping and signage shall be clearly visible, maintained and restored throughout the construction zone during and after the project.
- 21. In addition to standard dust control measures, streets shall be maintained in a clean condition, free of dirt, mud and debris during construction activities. The contractor shall provide daily, and as determined to be necessary by County inspectors, street sweeping using a modern mechanical or vacuum-assisted street sweeper.
- 22. The contractor shall not conduct construction operations in rain or heavy fog conditions.

# APPLICATION FOR ENCROACHMENT PERMIT

ום	E /	ŞΕ.	DE	ш	т٠
$\Gamma$		LUL.	T I	VII.	1,

Date	12/20/2018	OFFICE USE ONLY	
To:	San Joaquin County Department of Public Works  PG&E PM 35047744  (Applicant Name)  4040 West Lane (Mailing Address)  Stockton, CA 95204 (City, State, Zip Code)  (209) 470 - 2300  (Area Code - Telephone Number) s6pz@pge.com (Email Address)	JOB# 730052-6 REF#  APN CR#  EXP. DATE 5/15/19  VALID 1/15/19 TO 5/15/19 DRIVEWAYS  STREET FILBERT ST.  AREA STOCKTON QUAD NS  TYPE BELL HOLE, TRENCH  FORMS SS/WW, P-29, TRENCH CUT POLICY  NOTES "Special CONDITIONS"	
Sk	When calling, crew shall request "rain	9) 953-7421 <b>48</b> to <b>72</b> hours <b>before</b> work starts. clearance" for any work during winter months or through March	
	on N Filbert St approxi	construct and/or otherwise encroach on County Highway Right-of-Way mately 65' SOUTH of Francis St, wing work (description of work): 1451 N Filbert St	
I, the un	dersigned, certify that I am the owner of the respective	for approximately90 days.  property, or am qualified to represent the owner and agree to do the ions of San Joaquin County and subject to inspection and approval.  12/20/2018 Date	

Y:\FORMS & TEMPLATES\ENCROACHMENT PERMIT APPLICATION.doc (08/08)





#### Department of Public Works

Kris Balaji, Director of Public Works

Fritz Buchman, Deputy Director/Development Michael Selling, Deputy Director/Engineering Jim Stone, Deputy Director/Operations Kristi Rhea, Manager of Strategic Initiatives


# **Acknowledgement of Monument Preservation**

I, <u>Brett Brusatori</u> (Please print)	, a duly Licensed Land Surveyor or a Professional Engineer
authorized to perform Land Surv	eying in the State of California, Registration No. 8775,
hereby acknowledge and accept	all responsibility for the monument preservation as required
per Section 8771(a-f) of the Busi	ness and Professions Code within the bounds of the
construction activity permitted by	San Joaquin County Permit No. 15-1900076. PM# 35047744
I further acknowledge that I am h	ereby responsible for the Acknowledgement of Monument
Preservation prior to final accepta	ance of the construction activity.
8 g	and standing grow.
	LAND SV

Seal


PS-MONUMENT PRESERVATION

BRETT G. BRUSATORI No. 8775

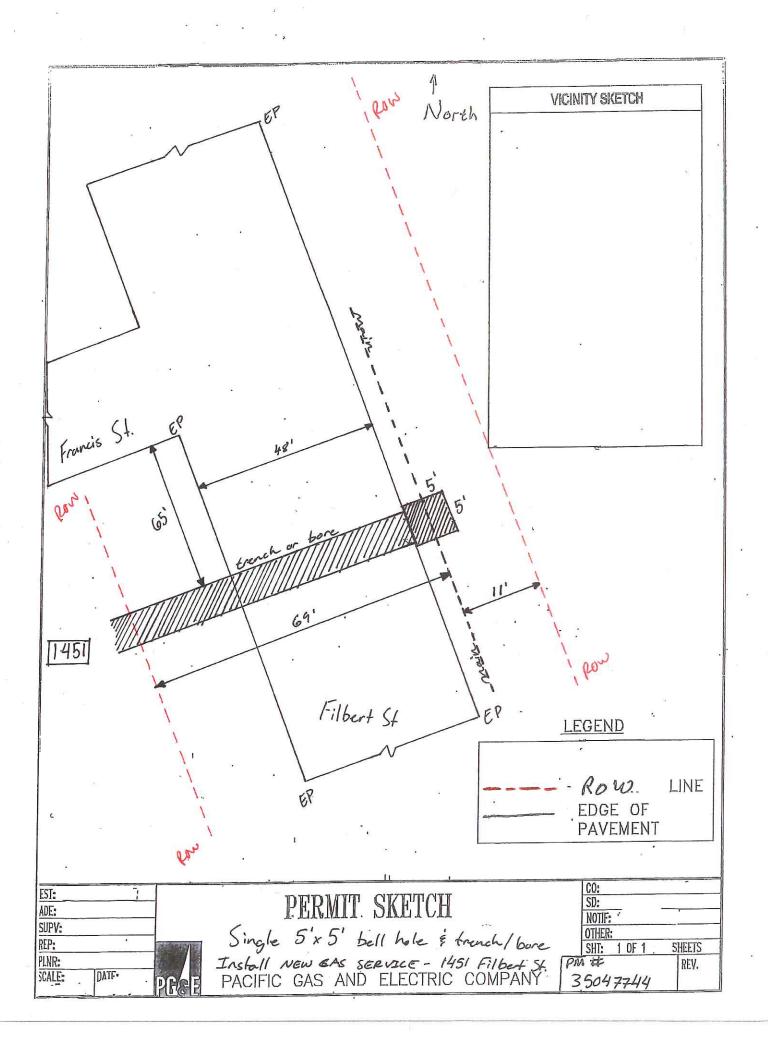

Character   Dimension   Dime		A Commission of the Commission		TEMPORARY TRAFF	FIC CONTROL PLAN	PLAN DIMENSION	DIMENSION GUIDELINES		Ť
Ft	SPEED MPH (2)	Dimension A/B/C ADVANCE WARNING SIGN SPACING (5)	Dimension L NERGING TAPER LENGTH	Dimension L/2 Skifting Taper Length	Dimension L/3 MINIMUM SHOULDER TAPER	Dimension "E" ER SPACE and and GGER STA" STANCE (43%)	MAXIMUM CHANNELIZER TAPER SPACING (3)	SULVINUM CHANNELIZER YANGENT SPACING (3)	MAXIMUM CHANNELIZER CONFLICT SPACING (6)
100         125         65         45         (155) (160) (165)         25         50           250         180         90         60         (200) (205) (215)         30         60           250         245         125         85         (250) (260) (275)         35         70           250         245         125         85         (250) (260) (275)         35         70         80           250         320         160         110         (305) (315) (335)         40         80         80           350         50         300         200         (425) (450) (475)         50         100           500         660         330         220         (495) (555)         50         100           500         720         360         240         (570) (600) (640)         50         100           500         720         360         260         (645) (685) (730)         50         100           Nort ton Freeways and Expressways shall meet the Califrans Standard Plans and Standard Specification requirements.         50         100         100           Posted Speed or observed operating speed (whichever is greater).         4845) (685) (730)         50         100         100	MPH	Ţ	The state of the s		#	1	#	4	#
250         180         90         60         (200) (205) (215)         30         60         60           250         245         125         85         (250) (205) (275)         35         70         70           250         320         160         110         (305) (315) (335)         40         80         70           350         540         270         180         (360) (380) (400)         45         90         70           500         600         300         200         (425) (450) (475)         50         100         70           500         720         330         220         (495) (520) (555)         50         100         70           500         720         360         240         (570) (600) (640)         50         100         70           500         780         390         260         (645) (585) (730)         50         100         70           Notice Speed or Observed operating sheet work is taking place or observed operating sheet work is taking place or ourses or areas of head-on conflict.           Charmelizer specing sheet work is taking place or ourses or areas of head-on conflict.	25	100	125	65	45	(160)	25	98	42
250         245         125         85         (250) (260) (275)         35         70           250         320         160         110         (305) (315) (335)         40         80           350         540         270         180         (360) (380) (400)         45         90           350         600         300         200         (425) (450) (475)         50         100           500         720         330         220         (495) (520) (555)         50         100           500         720         360         240         (570) (600) (640)         50         100           Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.         50         100           Posted Speed or observed operating speed (whichever is greater).         645) (655) (730)         50         100           Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.         645) (655) (730)         50         100           The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.         1660         1660         1660           Sign spacing in rural areas should be 500 ft.         7750         1660         1660         1660	30	250	180	06	60	(202)	30	26	15
250         320         160         110         (305) (315) (315)         40         80           350         540         270         180         (380) (400)         45         90           350         600         300         200         (425) (450) (475)         50         100           500         660         330         220         (495) (520) (555)         50         100           500         720         360         240         (570) (600) (640)         50         100           Work on Freeways and Expressways shall meet the Calitrans Standard Plans and Standard Specification requirements.         50         100           Posted Speed or observed operating speed (whichever is greater).         645) (685) (730)         50         100           Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.         260         100           The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.         150           Sign spacing in rural great should be 500 ft.         ** Table 6F-101(CA)*	35	250	245	125	85	(260)	35	2	17
350         540         270         180         (360) (380) (400)         455         90           350         600         300         200         (425) (450) (475)         50         100           500         660         330         220         (495) (520) (555)         50         100           500         720         360         240         (570) (600) (640)         50         100           Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.           Posted Speed or Observed operating speed (whichever is greater).           Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.           Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and safely stop.           The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.           Sign spacing in rural areas should be 500 ft.	40	250	320	160	110	(315)	40	8	20
350         600         300         200         (425) (475)         50         100           500         660         330         220         (495) (520) (555)         50         100           500         720         360         240         (570) (600) (640)         50         100           Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements:         50         100         100           Posted Speed or observed operating speed (whichever is greater).         Charmelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict:         Charmelizer spacing shall be reduced by half at areas and should be inserted in high-speed urban and rural areas.           The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.         Sign spacing in rural areas should be 500 ft.           ** Table 6F-101(CA)         ** Table 6F-101(CA)	45	350	540	270	180	(380)	45	36	22
500         660         330         220         (495) (520) (565)         50         100           500         720         360         240         (570) (600) (640)         50         100           500         780         390         260         (645) (685) (730)         50         100           Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.           Posted Speed or observed operating speed (whichever is greater).           Charmelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.           Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.           The Stopping Sight Distance should be 500 ft.           Sign spacing in rural areas should be 500 ft.	20	350	900	300	200	(450)	50	9	25
500       720       360       240       (570) (600) (640)       50       100         500       780       390       260       (645) (685) (730)       50       100         Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.         Posted Speed or observed operating speed (whichever is greater).         Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.         Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban areas and should be inserted in high-speed urban and rural areas.         The Stopping Sight Distance should be 500 ft.         Sign spacing in rural areas should be 500 ft.         ** Table 6F-101(CA)	55	500	660	330	220	(520)	50	100	25
500       780       390       260       (645) (685) (730)       50       100         Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.         Posted Speed or observed operating speed (whichever is greater).         Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.         Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.         The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.         Sign spacing in rural areas should be 500 ft.         ** Table 6F-101(CA)	00	500	720	360	240	(009)	20	25	25
Work on Freeways and Expressways shall meet the Caltrans Standard Plans and Standard Specification requirements.  Posted Speed or observed operating speed (whichever is greater).  Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.  Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.  The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.  Sign spacing in rural areas should be 500 ft.	65	500	780	390	260	(685)	50	\$	25
Posted Speed or observed operating speed (whichever is greater).  Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.  Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.  The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.  Sign spacing in rural areas should be 500 ft.	(1)	Work on Freeways	and Expressways	shall meet the Calt	rans Standard Pla	ins and Standard Specificat	ion requirements.		
Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.  Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.  The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.  Sign spacing in rural areas should be 500 ft.	(2)	Posted Speed or of	bserved operating	speed (whichever it	_		Statement of the statem	FOREST CONTRACTOR OF the contractor and the contractor of the cont	
Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas.  The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.  Sign spacing in rural areas should be 500 ft.	ව	Charnelizer spacin	g shall be reduced	l by half at areas wi	tere work is taking	place on curves or areas c	of head-on conflict.	The state of the s	
The Stopping Sight Distance should enable Road Users to see the Primary Flagger Station and safely stop.  Sign spacing in rural areas should be 500 ft.  ** Table 5F-101(CA)	(4-A)	Buffer space may b	se inserted in low-s	ipeed urban areas a	and should be inse	ented in high-speed urban as	nd rural areas.	And the second s	1000 1000
	(4-9)	The Stopping Sight	Distance should e	mable Road Users		/ Flagger Station and safely	stop.		
,	(2)	Sign spacing in rura	al areas should be	500 ft.			Andries — ils c'altra de la principal de la consensament que	Market Control of the	The second secon
	60	** Table 6F-101(C.4		And the second s	The second secon	Company of the Compan		The state of the s	

Figure 6H-10 (CA). Lane Closure on Two-Lane Road Using Flaggers (TA-10)

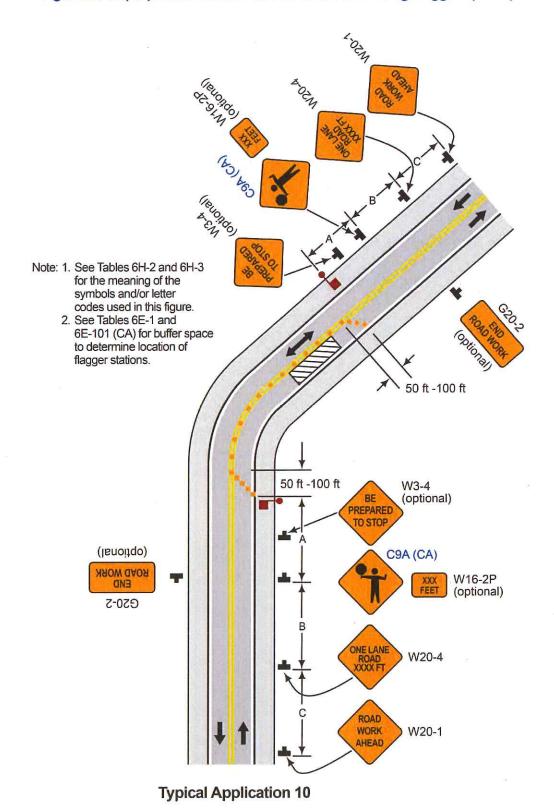

# 2-5.0

## TRENCH CUT POLICY

# ¥ 2-5.01

### General Requirements

- Resurfacing requirements specified in this policy are in addition to the Α. trench resurfacing requirements specified by County Standard Drawing No. R-29.
- For the purpose of this policy, "Surfacing Age" is defined as the age of B. the most recently completed roadway surfacing, including construction, reconstruction, or major overlay.
- Where the application of seal coats is required, a Type II Slurry Seal will be used in accordance with State Standard Specifications, Section 37-2.
- The permittee must post a one-year maintenance bond or cash D. deposit, in an amount specified by the Department.
- All pavement markings destroyed or obliterated must be replaced in E. kind by the permittee. Typical pavement markings include, but are not limited to, lane lines, centerlines, stop and stop ahead legends, limit lines, raised pavement markers, and miscellaneous delineators.
- The permittee is responsible for Survey Monuments disturbed by trenching and is required to file a corner record and to reestablish them using a Licensed Land Surveyor after the trench restoration is completed.
- G. Functional classification maps and Public Works Project Advertising Schedules are references for this policy.
- To facilitate scheduling and planning, Public Works staff will make available the most current Project Advertising Schedule at the monthly Utility Coordination Meeting and make it available to the public, at the Permits Counter, in January each year.

# 2-5.02 Collectors, Arterials and Expressways

Surfacing Age less than Three (3) Years: No pavement cuts. Α. Exceptions may be approved in accordance with Section 2-5.04 EXCEPTIONS.

#### Surfacing Age Three (3) Years and Over: B.

Longitudinal Trench Cutting in Paved Shoulder

#### Areas:

The entire shoulder of the road is to be resurfaced. The existing surfacing adjacent to the trenched area shall be planed to accommodate the overlay in a manner that does not cause drainage concerns. The nearest pavement cut shall be a minimum of three (3) feet from the edge of pavement, or the remaining pavement shall also be removed and replaced. (See County Standard Drawing No. R-37).

# 2. Longitudinal Trenches within Traveled Lanes:

The entire traveled lane where the trench is located is to be resurfaced with a one (1) inch asphalt concrete overlay. The existing surfacing adjacent to the trenched area shall be planed to accommodate the overlay in a manner that does not cause drainage concerns. The overlay shall be in accordance with State Standard Specifications, Section 39. Aggregate gradation shall be consistent with the existing surfacing material. (See County Standard Drawing No. R-37).

## 3. Cross-Cutting:

Cross-cutting is allowed at a minimum interval of 150 feet. At each cross-cut location a minimum of ten (10) feet on each side of trench shall be planed and resurfaced with one (1) inch asphalt concrete. If cross cuts are within the 150 feet minimum interval, the entire section between the first and last cross cut shall be planed and resurfaced with one (1) inch asphalt concrete. (See County Standard Drawing No. R-36).

4. The conditions described in paragraphs 1, 2 and 3 above will not apply if resurfacing is scheduled within two years.

#### 2-5.03 Local Roads

- A. Surfacing Age Under Three (3) years: No pavement cuts allowed. Exceptions may be approved in accordance with Section 2-5.04 EXCEPTIONS.
- B. Surfacing Age Three (3) to Five (5) Years:
  - Longitudinal cuts are permitted. A seal coat is required for that half of the roadway containing the trench. (See County Standard Drawing No. R-37).

2. Cross-cutting is allowed under the same conditions as Section 2-5.02(B)(3). If cross-cuts occur within the 150 feet minimum interval, resurfacing may be substituted with a slurry seal for that half of the roadway. (See County Standard Drawing No. R-36).

### 2-5.04 Exceptions


Excavation is prohibited in newly renovated County roadways for three (3) years after a notice of completion has been filed for a roadway improvement project, or a new roadway has been accepted. The Director of Public Works may approve exceptions that are in the best interest of the public, including but not limited to:


- A. An emergency that endangers life or property.
- B. For repair or modification to prevent interruption of essential utility service.
- C. For relocation work that is mandated by County, State or Federal law.
- D. For service for buildings where no other reasonable means of providing service exists.
- E. For potholing to verify utility depth or location.
- F. For trenchless excavations greater than three feet in depth of cover over the utility facility, and not requiring a significant surface Incision greater than industry bore pit standards.

Exceptions must be requested and submitted in writing to the Department. Payment of a nonrefundable processing fee is also required. Exceptions will be reviewed using the Departments Action Approval process, which requires the recommendation of a Deputy Director.

#### NOTES:

- 1. If the distance between cross—cuts are less then 150' the entire area between corss—cuts shall be planed and resurfaced with one (1) inch of Asphalt Concrete.
- 2. The resurfacing requirements shall be in addition to County Standard Drawing No. R-29
- Resurfacing for Bell Holes shall meet these requirements. If excavation occurs within the shoulder or lane, only that area shall be resufaced as shown.
- 4. If cross—cutting is performed on Local Roads at intervals less then 150' a Seal Coat for that half of the roadway containing the trench can be used in lieu of resurfacing. Section 2—5.03 (B—2).

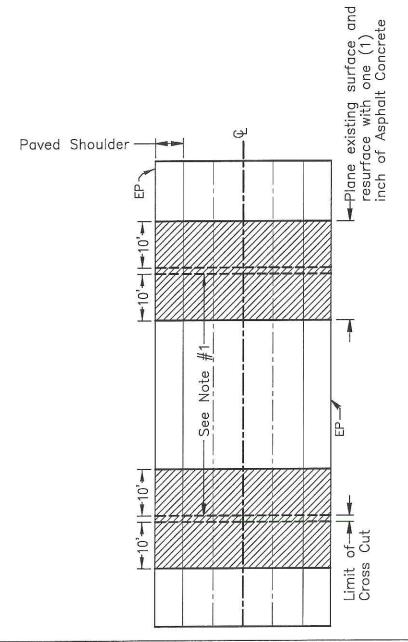



# TRENCH CUTTING POLICY CROSS CUTTING OF COUNTY ROADWAYS

COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS

Date: DEC 2014 Std. Dwg. No.

p. Revision Description Date

Approved by:

R-36


#### NOTES:


1. The resurfacing requirements shall be in addition to County Standard Drawing No. R—29.


2. If longitudinal cuts are required on a Local Road a Seal Coat can be used for that half of the roadway containing the trench. Section 2—5.03 (B—1).

Area to be resurfaced with one (1) inch Asphalt Concrete overlay existing surface to be planed, to accommodate overlay.

Section 2-5.02 (B-2).

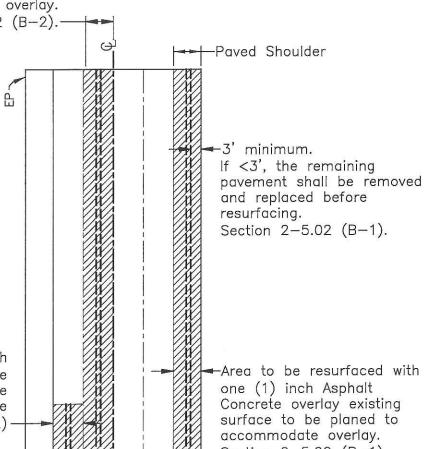

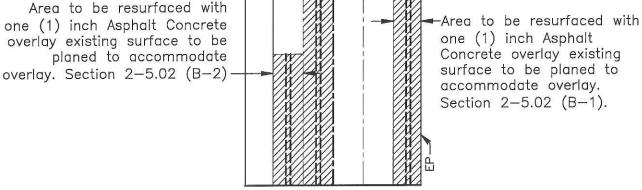



# TRENCH CUTTING POLICY LONGITUDINAL CUTTING OF COUNTY ROADWAYS

COUNTY OF SAN JOAQUIN


DEPARTMENT OF PUBLIC WORKS

Date: DEC 2014 Std. Dwg. No.

Approved by:
Mithel Selling

o. Revision Description Date

Dwg. No. R-3

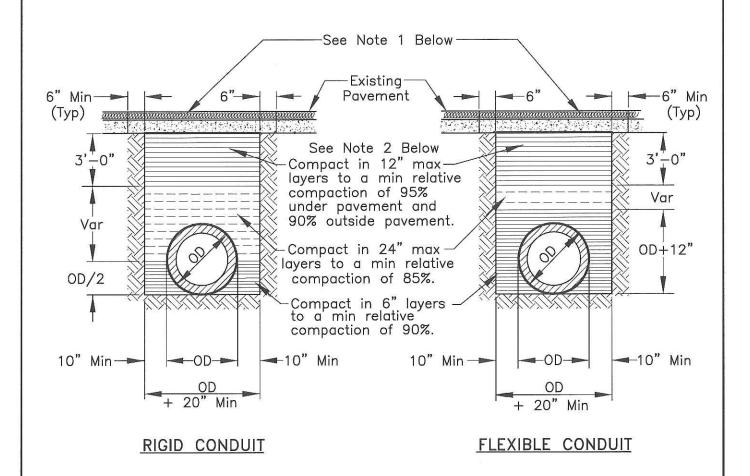

#### NOTES:

- 1. New pavement shall be 1" thicker than existing pavement, minimum of 0.25 Ft. New base shall be 1" thicker than existing base, min of 0.50 Ft.
- 2. Select native material or imported granular material as approved by the Director of Public Works. Backfill with materials equal to or better than the existing pavement and base in quality.
- 3. Relative compaction of materials shall be tested in accordance with the State of California, Dept. of Transportation Testing Manuals, test method No. California 216 or 231.
- 4. All existing pavement shall be neatly cut to line prior to trench excavation.
- 5. Jetting or ponding will be permitted within the street right—of—way with a 3 year bond, when approved by the Director of Public Works.
- 6. When shown by soil composition and compactability, ninety percent (90%) compaction may be used, when approved by the Director of Public Works.
- 7. Special bedding and backfill requirements may be shown on the plans or specified in the special provisions.



#### GENERAL PROVISIONS

#### GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

#### **PUBLIC CONVENIENCE AND SAFETY:**

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
  - Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
  - 2. In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.
    - a. The County of San Joaquin Public Works Department

d. The local fire district

b. The County of San Joaquin Sheriff's Office

e. The local school district

c. The local postal service

- f. The local residents involved
- B. Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- C. Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- D. Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

#### STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and transportation Officials (AASHTO) designations.
  - 1. For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M
  - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class III.
  - Plastic pipe conforming to AASHTO Designation M294.
- B. All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1:06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- C. Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- D. All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- E. The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be installed
- F. All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

#### REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- All excavations shall be backfilled and compacted immediately after work therein has been completed.
- B. Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the Engineer.
- C. Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- D. Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one -foot where 90% compaction is required, and two-feet where 80% compaction is required.
- E. No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- F. Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- G. All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- H. All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
  - 1. Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch(1/2) maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
  - 2. Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
  - 1. If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
  - 2. Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- J. Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

# SPECIAL PROVISIONS

Winter Weather Utility Work

- 1. <u>SUPERVISION:</u> The utility company (**permittee**) shall furnish full-time supervision of all work to insure compliance with the permit provision.
- 2. <u>START OF WORK:</u> No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
- 3. <u>CLEAN PAVEMENT:</u> Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
- **4. <u>DAILY RESTORATION:</u>** Private driveways and road intersections shall be restored daily.
- 5. <u>WEATHER-TIGHT CONDITIONS:</u> All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.