


Sept 1976

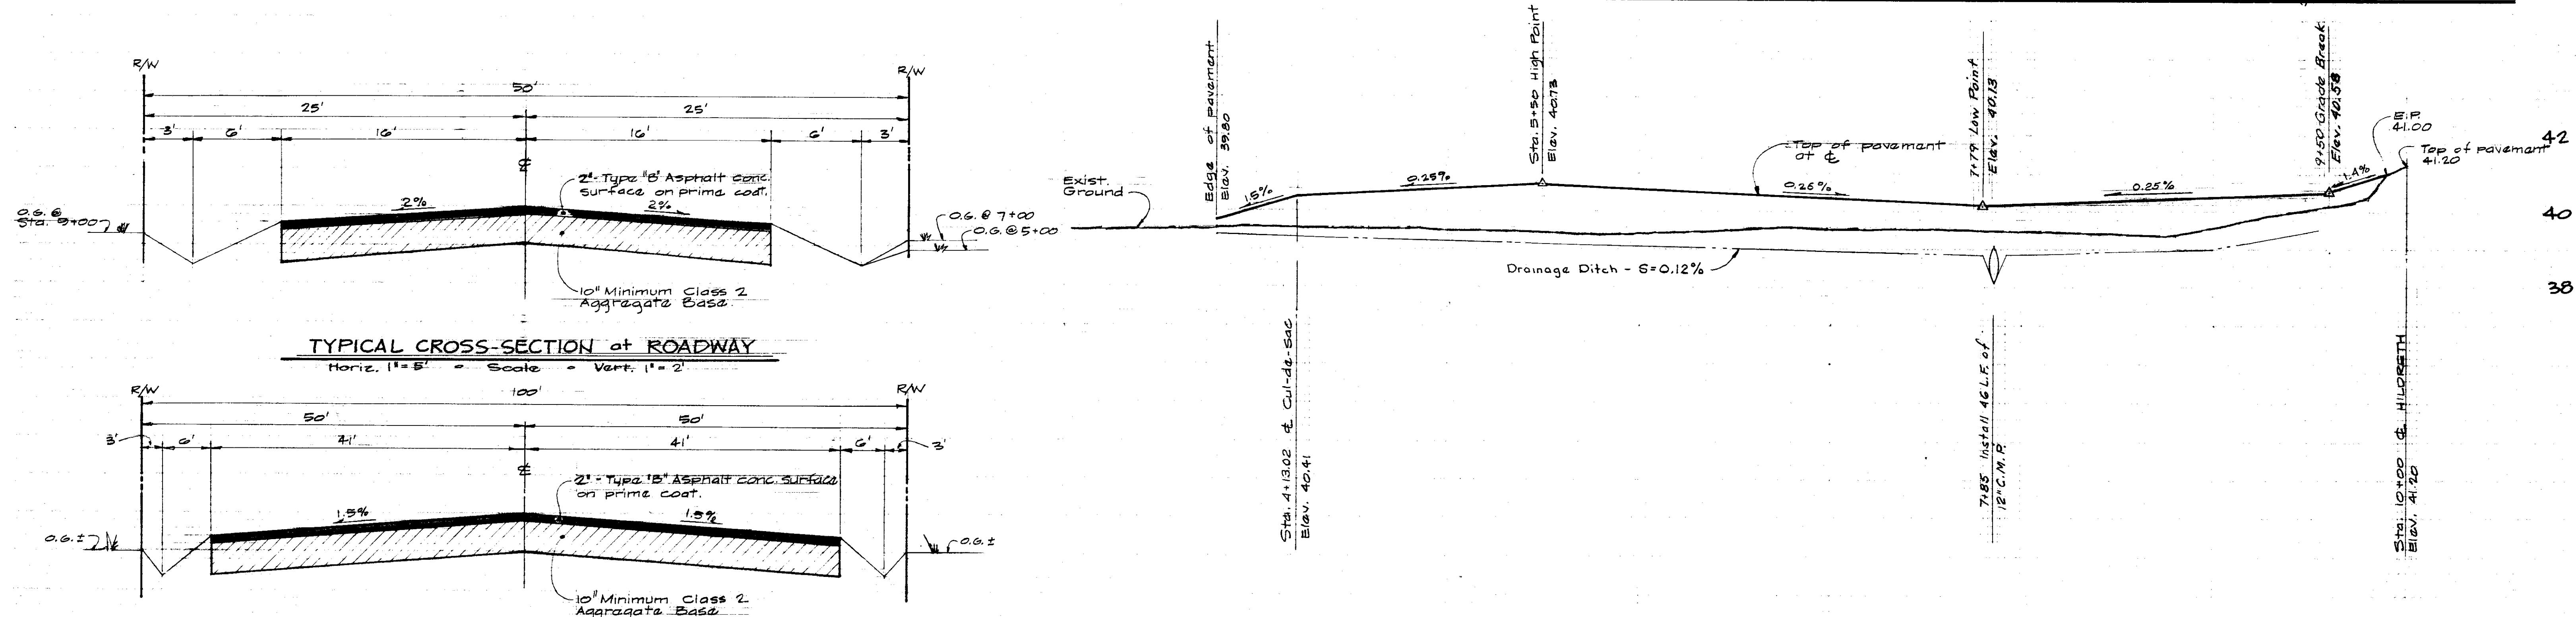

GENERAL NOTES

- Elevations are based on S.J. County terrain data of Hildreth Road, West of the C.C.T. Co. track.
- For type "B" barricade see Specifications.
- For standard street sign see Specifications.
- For construction requirements see Standards entitled "Specification for the Construction of AMANDE COURT, MORADA AREA, San Joaquin County, CALIF." It shall be the contractor's responsibility to coordinate the relocation of the existing anchor and/or power pole with R.G. #E.
- The site is presently in orchard. The contractor shall remove all trees within and 5' outside the R/W and drainage easement. Disposal of the stumps will be off-site.
- Excess excavation may be spread on-site within 100' of the R/W. Lots shall be finish graded so as not to drain into the public Roadway or adjacent parcels. Finish grading shall be the responsibility of the lot owner (N.I.C.)

CONSTRUCTION QUANTITIES

2" Asphalt Concrete - Type "B"	22,880	Sq. Ft.
10" Aggregate Base - Class "2"	22,880	Sq. Ft.
Roadway Excavation	250	Cu. Yds.
Survey Monuments	4	each
Street Signs	1	only
Type "B" Barricade	1	only
12" C.M.P.	50	L.F.
6" Chain Link Fence	348	L.F.

Quantities listed are for the purpose of estimating for the use of the Public Works Department only.

APPROVED BY:

Don Layson

San Joaquin Local Health District

Chip Tom Renner - Chief

Waterloo - Morada Fire District

BAUMBACH & PIAZZA

CIVIL ENGINEERS - SURVEYORS

221 W. OAK ST., LODI, CALIF. 95240 PH. 209-368-8098

COUNTY OF SAN JOAQUIN
DEPARTMENT OF PUBLIC WORKS

APPROVED:

William Ward
DIRECTOR OF PUBLIC WORKS

DATE: Aug. 11, 1976
R.C.E. 9338

AMANDE COURT

PROPOSED ROAD
PLAN, PROFILE & CROSS SECTIONS

SHEET 1 OF 1

JOB NO. 75158

FILE NO.