

COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS

P.0. BOX 1810-1810 E. HAZELTON AVENUE STOCKTON, CALIFORNIA 95201 (209) 468-3000 FAX # (209) 468-9324 Permit No: **PS-1901049**Date Issued: 04/09/2019
Start Date: 04/15/2019
Exp. Date: 05/15/2019
Project No: PWP730079

Quad: SW

UE/CR/PM NO:A01JX1H

ENCROACHMENT PERMIT

To: AT & T - FRESNO 5555 E. OLIVE RM#300III FRESNO, CA 93727

Encroachment Type:

Aerial Work & Traffic Control Devices

Location:

S/S OF LINNE RD. 1,165' E/O MACARTHUR DR.

In compliance with your request of $\underline{04/09/2019}$, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD*****See Attached	Special Conditions"****

FORMS: SS/WW, R-29

Est. Permit Fee: \$490.00

KRIS BALAJI, Director Department of Public Works

WHITE -Permittee
GOLDENROD -PWD Central File
YELLOW -Field Inspection
PINK -Permit Section

Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:

STREETS AND HIGHWAYS CODE

- 1. Division 1, Chapter 3
- 2. Division 2, Chapter 2, Section 942
- 3. Division 2, Chapter 4, Section 1126
- 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

- 2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
- 3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
- 4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
- 5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
- 6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
- 7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
- 8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
- 9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
- 10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
- 11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
- 12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
- 13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

SPECIAL CONDITIONS FOR ATT – LINNE RD. - #A01JX1H ENCROACHMENT PERMIT

- 1. Maintain traffic controls for all roads. Traffic control delays shall not exceed 15 minutes. Two-way traffic shall be maintained during non-working hours with excavated areas backfilled or plated. During working hours, two-way traffic control shall be maintained with one lane open and appropriate flaggers.
- 2. Access to all properties shall be maintained at all times except when work is occurring at the access point. Minimal delays will be allowed to provide access within the work zone area. Driveway access shall be fully restored at the end of each workday. Driveways disturbed by the contractor shall be replaced with in-kind or better materials.
- 3. Residents and businesses shall be notified in writing, as approved by the County, 48 hours in advance of any impacts to their access.
- 4. Any areas where parking is to be restricted shall have signs noting the restrictions in place at least 48 hours in advance.
- 5. School Buses shall be passed through the work zone with minimal delays.
- 6. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 7. All pipe and pipeline related facilities including, but not limited to, valves, utility boxes and vaults, and frames and covers shall be maintained by ATT, including any facilities that are abandoned in place. ATT shall be responsible for any and all costs associated with the removal, relocation and/or adjustment of these facilities as determined by the County at ATT's expense. (Streets and Highways Code Section 1463)
- 8. All future maintenance of the pipeline and related facilities within the County right-of-way will require a San Joaquin County Encroachment Permit.
- 9. County roads shall be kept clean from mud and debris at all times along the access points and work zone areas during entire project. All standard roadway striping and signage shall be clearly visible, maintained and restored throughout the construction zone during and after the project.
- 10. In addition to standard dust control measures, streets shall be maintained in a clean condition, free of dirt, mud and debris during construction activities. The contractor shall provide daily, and as determined to be necessary by County inspectors, street sweeping using a modern mechanical or vacuum-assisted street sweeper.
- 11. The contractor shall not conduct construction operations in rain or heavy fog conditions.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:		
Date 03/22/19 To: San Joaquin County Department of Public Works	OFFICE USE ONLY	
	JOB# <u>736679</u> REF# CR#	
AT&T / VCC PERMITS DESK (Applicant Name) 5555 E. Olive Ave (Mailing Address)	VALID 4/15/19 TO 5/15/19 STREET LINNERD. AREA TRACY QUAD SW TYPE ACCIAL WORK & TCP FORMS SOLUMN NOTES "Special Conditions"	
Fresno, CA 93727 (City, State, Zip Code)	- WORK IN MUTIRE LOCATIONS &	
(559) 454-4900 g26977@att.com (Area Code - Telephone Number)		
A COPY OF THE TRAFFIC CONTROL PL SEE ATTACHMENTS	LAN IS SUBMITTED WITH THIS PERMIT;	
The undersigned hereby applies for permission to excavate, cor the SOUTH side of WLINNE RD of SMACARTHUR DR ACCESS POLE# 8624 TO SPLICE EXISTING A ATTACHED DOCUMENT FOR OTHER SPECIF	nstruct and/or otherwise encroach on County Highway Right-of-Way on approximately1,165' feet mile _EAST, by performing the following work (description of work): AERIAL FIBER CABLE. PLEASE SEE THE FIC JOB LOCATION & DESCRIPTION.	
Work will commence on or about4/1/195days.	for approximately	
work described above in accordance with the rules and regulation	property, or am qualified to represent the owner and agree to do the ons of San Joaquin County and subject to inspection and approval.	

PERMIT APPLICATION FOR AT&T JOB# A01JX1H

JOB LOCATION:

POLE: 7682: 7700 W LINNE RD

MANHOLE# 546: 7505 W LINNE RD

MANHOLE# 268: 28476 S BIRD RD

MANHOLE# 583: 31101 KASSON RD

BARREL VAULT: 32889 KASSON RD

JOB DESCRIPTION:

POLE: 7682: S/S W LINNE RD, 660' W/O S CHRISMAN RD, ACCESS POLE# 7682 TO SPLICE EXISTING AERIAL FIBER CABLE.

MANHOLE# 546: ACCESS MANHOLE# 546 (STREET) TO SPLICE EXISTING FIBER CABLE.

MANHOLE# 268: ACCESS MANHOLR# 268 TO SPLICE EXISTING FIBER CABLE.

MANHOLE# 583: ACCESS MANHOLE# 583 TO SPLICE EXISTING FIBER CABLE.

BARREL VAULT: ACCESS BARREL VAULT TO SPLICE EXISTING FIBER CABLE.

THE ASSOCIATED TCP IS SUBMITTED WITH THIS PERMIT FOR AT&T JOB# A01JX1H.

GENERAL PROVISIONS

GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

PUBLIC CONVENIENCE AND SAFETY:

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
 - 1. Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
 - 2. In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.

The County of San Joaquin Public Works Department

d. The local fire districte. The local school district

b. The County of San Joaquin Sheriff's Officec. The local postal service

f. The local residents involved

- Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- C. Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- D. Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and transportation Officials (AASHTO) designations.
 - For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M 170M.
 - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class III.

. Plastic pipe conforming to AASHTO Designation M294.

- B. All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1:06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- C. Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- D. All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- E. The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be installed.
- F. All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

REPAIRS OF THE COUNTY RIGHT-OF-WAY:


- A. All excavations shall be backfilled and compacted immediately after work therein has been completed.
- B. Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the Engineer.
- C. Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- D. Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one—foot where 90% compaction is required, and two-feet where 80% compaction is required.
- E. No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- F. Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- G. All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- H. All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
 - 1. Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch(1/2) maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
 - Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size
 aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- I. Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
 - 1. If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
 - 2. Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- J. Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

SPECIAL PROVISIONS

Winter Weather Utility Work

- 1. <u>SUPERVISION:</u> The utility company (**permittee**) shall furnish full-time supervision of all work to insure compliance with the permit provision.
- 2. <u>START OF WORK:</u> No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
- 3. <u>CLEAN PAVEMENT:</u> Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
- 4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
- 5. <u>WEATHER-TIGHT CONDITIONS:</u> All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.

SIGN LEGEND **GENERAL TRAFFIC CONTROL NOTES:** THE CONTRACTOR IS RESPONSIBLE FOR PROMPTLY RESTORING THE ROAD BACK TO SATISFACTORY CONDITION WHICH INCLUDES, BUT IS NOT LIMITED TO, PAVING, STRIPING, MARKINGS, SIGNAGE, AND LOOP DETECTION. ALL PLANS SHALL BE IN ACCORDANCE WITH 2014 CAMUTCD. BE PREPARED TO STOP ROAD WORK ROAD CLOSED CENTER LANE CLOSED AHEAD DETOUR AHEAD RIGHT LANE LEFT LANE BIKE LANE LANE CLOSED CLOSED CLOSED THE AGENCY RESERVES THE RIGHT TO OBSERVE THESE TRAFFIC CONTROL PLANS IN OPERATION AND TO MAKE CHANGES AS FIELD CONDITIONS WARRANT. AHEAD AHEAD AHEAD AHFAD TRENCHES SHALL BE BACKFILLED OR STEEL-PLATED DURING NON-WORK HOURS. STEEL PLATES SHALL HAVE AN ASPHALT RAMP ON ALL EDGES, SECURELY W20-3 W20-2 W20 - 1C20(CA)(R) C20(CA)(BIKE) C30 (CA) C30(BIKE) C20(CA)(L) W4-2(R)SUPPORTED SO THEY WON'T ROCK AND A SIGN POSTED NEAR THE PLATES IDENTIFYING THE CONTRACTOR'S NAME AND 24 HOUR EMERGENCY TELEPHONE NUMBER. ALL DIRT, DUST, AND DEBRIS SHALL BE REMOVED FROM THE STREET AT THE END OF EACH DAY AND AT THE END OF THE JOB. THE STREET SHALL BE KEPT IN A DRIVABLE CONDITION AT ALL TIMES. OPEN TRENCH NARROW LANE ROAD OND CLOSED 4. ANY WORK THAT CREATES AN UNDUE SAFETY RISK OR THAT CREATES SEVERE CONGESTION WILL BE SHUT DOWN BY THE AGENCY. NARROWS AHEAD 5. A COPY OF ALL TRAFFIC REQUIREMENTS AND TRAFFIC CONTROL PLANS ISSUED BY THE AGENCY MUST BE KEPT ON THE JOB SITE. C12(CA) C27(CA) 6. APPROVAL OF THIS PLAN DOES NOT CONSTITUTE AN OFFICIAL PERMIT. CONTACT THE AGENCY FOR INFORMATION ON OBTAINING A PERMIT 7. ALL TRAVEL LANES WILL TYPICALLY BE A MINIMUM OF 12 FEET WIDE, 14 FEET IF ADJACENT TO BIKE LANES, UNLESS OTHERWISE SPECIFICALLY APPROVED BY SHOULDER CLOSED SHOULDER THE AGENCY. WORK 8. FLASHING ARROW BOARDS AS REQUIRED BY THE AGENCY. 9. WARNING (W) SERIES SIGNS USED IN WORK ZONES SHALL BE BLACK ON AN ORANGE BACKGROUND, BUSES ONLY 10. CONES AND PYLONS SHALL HAVE YELLOW REFLECTORIZED SLEEVES WHEN PLACED ALONG THE CENTERLINE AND WHITE REFLECTORIZED SLEEVES ALONG SHARE THE ROAD FULL LANE LEFT LANE RIGHT **←** LEFT THE OUTSIDE SHOULDER. TURN LEFT CLOSED CLOSED 'URN RIGH' THRU TRAFFIC 11. IF PARKING IS ALLOWED IN THE ADVANCE WORKING AREA, ADVANCE WARNING SIGNS SHALL BE MOUNTED ON HIGH LEVEL DEVICES. R11-2 12. THE CONTRACTOR SHALL POST TOW-AWAY/NO PARKING SIGNS SEVENTY-TWO (72) HOURS IN ADVANCE, WITH DAY OF WEEK, DATE, AND WORK HOURS NOTED, AND SHALL BAG PARKING METERS (WHERE APPLICABLE). SIDEWALK CLOSED AHEAD CROSS HERE END DETOUR ROAD WORK CLOSED DETOUR 13. OPEN CUT WORK SHALL BE DONE IN PHASES. G20-2 W1-6(R) 14. WORKERS SHALL WEAR HARD HATS AND ORANGE VESTS AT ALL TIMES. DO NOT 15. COUNTY TRANSIT DISTRICT SHALL BE NOTIFIED (5) WORKING DAYS PRIOR TO ANY WORK THAT AFFECTS BUS STOPS. STOP ON 16. CONSTRUCTION SIGNS SHALL NOT OBSTRUCT SIGHT VISIBILITY AT DRIVEWAYS. TRACKS 17. CONTRACTOR SHALL NOTIFY ALL LOCAL BUSINESS OWNERS/OCCUPANTS 72 HOURS IN ADVANCE PRIOR TO ANY CONSTRUCTION ADJACENT TO BUSINESSES SYMBOL LEGEND R8-8 JOB LOCATION: WORK HOURS: П S FROM: -TABLE 6C-2 2014 CALIFORNIA MUTCD--TABLE 6C-1 2014 CALIFORNIA MUTCO-YPE I BARRICADE EXISTING SIGN -TABLE 6C-3 2014 CALIFORNIA MUTCD-CHANNELIZING SIGNALIZED 8690 W LINNE RD RECOMMENDED ADVANCE WARNING SIGN SPACING-DEVICE/CONE DEVICE W/ SIGN W/ SIGN INTERSECTION *TAPER LENGTH CRITERIA FOR TEMPORARY TRAFFIC CONTROL ZONE ROAD TYPE DISTANCE BETWEEN SIGNS** TAPER LENGTH (L)* +000 T.A.N.S.A.T BEGIN CROSS STREET: END CROSS STREET TYPE III BARRICADE W/SIGN(5'H x 4 TYPE II BARRICADE HIGH LEVEL ARNING DEVICE FLASHING 100 FEET | 100 FEET | 100 FEET SIGN(3'H x 2'W URBAN - MORE THAN 25 MPH TO 40 MPH* 20 115 250 FEET | 250 FEET | 250 FEET VALPICO RD. * URBAN - MORE THAN 40 MPH*** 350 FEET | 350 FEET | 350 FEET MAZE BLVD. T.A.N.S. -TABLE 6C-4 2014 CALIFORNIA MUTCO RURAL 500 FEET | 500 FEET | 500 FEET OW AWAY NO PORTABLE EXPRESSWAY/FREEWAY 1,000 FEET 1,500 FEET 2,640 FEET FLAGGER FLASHING BEACON EED LIMIT (S) TAPER LENGTH (L) HE COLUMN HEADING A, B, AND C ARE THE DIBMINISIONS SHOWN IN FIGURES 6H-1 THROUGH 6H-46, DIMENSION IS THE DISTANCE FROM THE TRANSITION OR POINT OF RESTRICTION TO THE FIRST THE B DIMENSION IS THE DISTANCE BETWEEN THE FIRST AND SECOND SIGNS. THE COMMISSION HE DISTANCE OF THE STATE OF THE ST PERMIT NUMBER: THOMAS GUIDE: 40 MPH OR LESS L= WS² 60 SB CMS EXISTING STRIPING -DOUBLE YELLOW EXISTING STRIPING AERIAL CABLE STARTING, OR THE ANTICIPATED OPERATIN SPEED IN KM/H (MPH \otimes MH НН SCOPE OF WORK: COUNTY OF: SAN JOAQUIN MANHOLE, POLE & BV ACCESS EXISTING LANE DIRECTION OF TRAVEL FLOW STRIPING START DATE: END DATE: POSTED SPEED APPROACH TAPER CONE SIGN JOB NUMBER A01JX1H TRAFFIC CONTROL PLAN LIMIT SPEED LENGTH SPACING SPACING SCALE: N/A VARIES **VARIES** VARIES **VARIES** VARIES PAGE: COVER SHEET PLANS ACCEPTED BY: PERMIT WORK EXTENSIONS MUST BE OBTAINED BY THE NOTHING CONTAINED ON THIS DRAWING SHALL PREVENT LOCAL JURISDICTIONS FROM **CHC Consulting** END OF PERMIT DATE 1845 W. Orangewood Ave., Suite 300, Orange, CA 92868 (949) 250-0004 / FAX (949) 250-0006 MODIFYING, CHANGING, OR ADOPTING NEW SPECIFICATIONS DEEMED NECESSARY DATE CRITERIA FOR POSITION, LOCATION, AND USE OF TRAFFIC CONTROL DEVICES IS SOLELY FOR PLANS PREPARED BY HE PURPOSE OF GUIDANCE TO ASSIST IN THE SET UP OF THE TRAFFIC CONTROL PLANS. JAI PRABHAT PHONE: (949) 250-0004 DATE: 03-22-19 APPROVAL OF THIS PLAN DOES NOT CONSTITUTE AN OFFICIAL PERMIT. CONTACT THE AGENCY EXP. DATE REVISION DATE: N/A

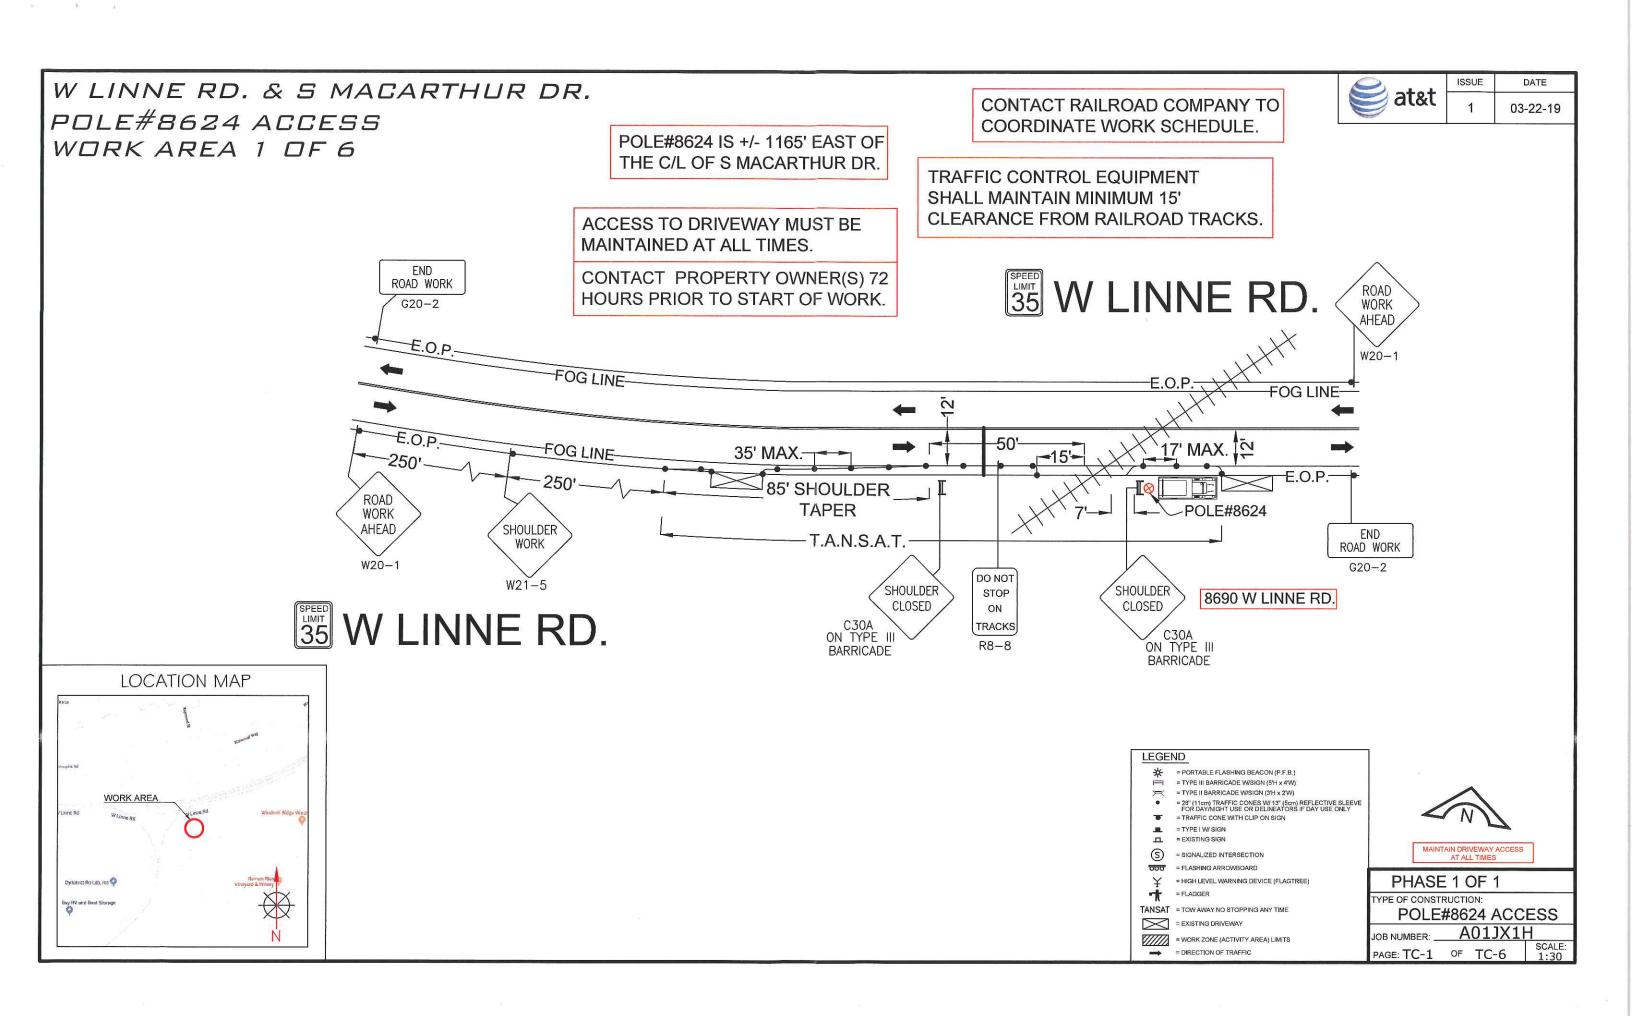

W LINNE RD. & S CHRISMAN RD. at&t 03-22-19 POLE#7682 ACCESS WORK AREA 2 OF 6 POLE#7682 IS +/- 660' WEST OF W LINNE RD. WORK THE C/L OF S CHRISMAN RD. ROAD WORK G20-2 W20 - 1E.O.P. FOG LINE -E.O.P.-FOG LINE-FOG LINE POLE#7682 -350'--350'--180' SHOLDER TAPER--T.A.N.S.A.T.-ROAD WORK SHOULDER ROAD WORK WORK AHEAD ACCESS TO DRIVEWAY MUST BE G20-2 C30A ON TYPE III SHOULDER MAINTAINED AT ALL TIMES. CLOSED W20 - 1BARRICADE 7700 W LINNE RD. W21-5**CONTACT PROPERTY OWNER(S) 72** W LINNE RD. HOURS PRIOR TO START OF WORK. LOCATION MAP LEGEND = PORTABLE FLASHING BEACON (P.F.B.) Chohatha FSHS = TYPE III BARRICADE W/SIGN (5'H x 4'W) WORK AREA = TYPE II BARRICADE W/SIGN (3'H x 2'W) = 28" (11cm) TRAFFIC CONES W/ 13" (5cm) REFLECTIVE SLEEVE FOR DAY/NIGHT USE OR DELINEATORS IF DAY USE ONLY = TYPE I W/ SIGN = EXISTING SIGN = SIGNALIZED INTERSECTION = HIGH LEVEL WARNING DEVICE (FLAGTREE) PHASE 1 OF 1 = FLAGGER YPE OF CONSTRUCTION: POLE#7682 ACCESS JOB NUMBER: A01JX1H = WORK ZONE (ACTIVITY AREA) LIMITS PAGE: TC-2 OF TC-6 = DIRECTION OF TRAFFIC

