



COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: PS-1901257
Date Issued: 05/03/2019
Start Date: 05/03/2019
Exp. Date: 02/01/2020
Project No: PWP7110005
Quad:

ENCROACHMENT PERMIT

To: CVIN
7447 N. PALM BLUFFS AVE., STE. 105
FRESNO, CA 93711

Encroachment Type:

Trench	Bore (up to 12 inch Dia)		
--------	--------------------------	--	--

Location:

FRONT ST@HWY 26

In compliance with your request of 04/26/2019, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD

FORMS: SS/WW, R-29

Est. Permit Fee: \$1,249.00

WHITE -Permittee
GOLDENROD -PWD Central File
YELLOW -Field Inspection
PINK -Permit Section

KRIS BALAJI, Director
Department of Public Works

By: 
Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:

STREETS AND HIGHWAYS CODE

1. Division 1, Chapter 3
2. Division 2, Chapter 2, Section 942
3. Division 2, Chapter 4, Section 1126
4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 04/17/2019

To: San Joaquin County
Department of Public Works

CVIN, LLC
(Applicant Name)

7447 N. PALM BLUFFS AVE. Ste. 105
(Mailing Address)

FRESNO, CA 93711
(City, State, Zip Code)

559-554-9139
(Area Code - Telephone Number)

Rbebb@cvin.com
(Email Address)

OFFICE USE ONLY			
JOB #	<u>110005</u>	REF #	
APN		CR #	
EXP. DATE			
VALID		TO	
STREET			DRIVEWAYS:
AREA		QUAD	*
TYPE			*
FORMS			*
NOTES			

Sketch (Detailed plans may be submitted)

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the SOUTH side of E. FRONT ST. approximately feet/mile of 1.25"Ø CONDUIT & 4-WAY FUTUREPATH, by performing the following work (description of work):
INSTALLING 376 ft. OF 1.25" & 4-WAY FP VIA HDD BORE METHOD, MAINTAINING A MINIMUM OF 48" COVER
INSTALL (1) NEW 24x36x30 HANDHOLE AS FAR AWAY FROM THE EDGE OF PAVEMENT AS POSSIBLE

Work will commence on or after 05/01/2019 for approximately 240 days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

R. Bebb

Signature of Applicant - Title

04/17/19

Date

Acknowledgement of Monument Responsibility
"Pre-Construction"

Monument Preservation prior to construction activity

I, Andrew Hammond, a duly Licensed Land Surveyor or a Professional Engineer authorized
(Please Print)
to perform Land Surveying in the State of California, Registration No. 9446, hereby acknowledge
and accept all responsibility for the monument preservation as required per Section 8771(a-f) of the Business
and Professions Code within the bounds of the construction activity permitted by the following permit:

Permit No. _____

Construction Site Address: Cano-Linden (Verizon) Front Street Linden (Linden, CA)

I further acknowledge that I am hereby responsible for the Acknowledgement of Monument Preservation prior
to final acceptance of the construction activity.

 Seal
Signature

4/17/19
Date



4/17/19

CVIN, LLC
SAN JOAQUIN COUNTY PERMIT PLANS
INSTALLATION OF FIBER OPTIC FACILITIES
VERIZON WIRELESS - CANO LINDEN
19445 E. SR 26, LINDEN, CA

PROJECT LENGTH: 470'	CALTRANS LENGTH: 96'
CITY LENGTH: ---	RAILROAD LENGTH: ---
COUNTY LENGTH: 376'	WATER LENGTH: ---
CONSTRUCTION TOTALS	MATERIAL TOTALS
BORE 357'	1.25" HOPE CONDUIT 470'
CASED BORE 113'	1" HOPE CONDUIT ---
TRENCH ---	4-WAY FUTURE PATH 470'
MICRO TRENCH ---	10/12mm MICRODUGT ---
FLOW ---	4" CSING 113'
BRIDGE ATTACHMENT ---	3/4" EMT PIPE ---
CUT & TRENCH ---	16 AWG TRACER WIRE ---
ROCKSAW ---	MULE TAPE ---
CONDUIT OVERDIE ---	BORE PITS 4
AERIAL ---	2x36x30 HANDHOLES 3
POLE RISER ---	BARREL VALVE 1
MARKER POST (EST.) 4	

CONTRACTOR NOTICE:

THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES SHOWN ON THESE PLANS WERE OBTAINED BY FIELD INSPECTION AND A SEARCH OF THE AVAILABLE CITY OR COUNTY RECORDS. SINCE THE ACTUAL LOCATION AND NATURE OF THE UNDERGROUND FACILITIES MAY BE SOMEWHAT DIFFERENT FROM THAT SHOWN, THE CONTRACTOR IS REQUIRED TO VERIFY THE INFORMATION THROUGH UNDERGROUND SERVICE ALERT (USA) OR BY CONTACTING THE UTILITY COMPANIES DIRECTLY, PRIOR TO EXCAVATION.

GENERAL NOTES:

THE FOLLOWING NOTES ARE PROVIDED TO GIVE DIRECTIONS TO THE CONTRACTOR BY THE ENGINEER OF WORK, THE PERMIT AGENCY'S SIGNATURE ON THESE PLANS DOES NOT CONSTITUTE APPROVAL OF THESE NOTES AND THAT AGENCY WILL NOT BE RESPONSIBLE FOR THEIR ENFORCEMENT:

- THE LOCATIONS OF EXISTING UTILITIES, RIGHTS-OF-WAY AND EASEMENTS SHOWN ON THESE PLANS ARE BASED ON AVAILABLE RECORDS AND ARE APPROXIMATE IN NATURE. WHERE CONFLICTS EXIST WITHIN THE RECORDS OR BETWEEN THE RECORDS AND FIELD OBSERVATIONS, THE ENGINEER OF WORK ASSUMES NO RESPONSIBILITY FOR THE CORRECTNESS OF THAT INFORMATION AS DEPICTED.
- BOTH TO COMMENCING IMPROVEMENT OPERATIONS, THE CONTRACTOR SHALL VERIFY THE LOCATION, BOTH HORIZONTALLY AND VERTICALLY, OF ALL EXISTING FACILITIES AFFECTED BY THE PROPOSED WORK, WHETHER OR NOT THOSE FACILITIES ARE DEPICTED CORRECTLY ON THESE PLANS.
- IF EXISTING FACILITIES VARY SIGNIFICANTLY IN LOCATION OR DEPTH FROM THESE PLANS, THE ENGINEER OF WORK SHOULD BE NOTIFIED TO MAKE ANY DESIGN CHANGES REQUIRED.
- THE CONTRACTOR SHALL BE TOTALLY RESPONSIBLE FOR COMPLIANCE WITH THE PROVISIONS OF THE STATE OF CALIFORNIA SAFETY ORDERS.
- THE CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY; THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS; AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER OF WORK HARMLESS.
- THE BORE LOCATIONS INDICATED ON THE STAKING SHEETS ARE THE ENGINEER'S BEST ESTIMATE OF LOCATION AND LENGTH AS REQUIRED TO MEET CITY, JURISDICTIONAL REQUIREMENTS AND/OR TO AVOID SURFACE OR OTHER DAMAGE THAT MAY BE ASSOCIATED WITH TRADITIONAL TRENCHING OR FLOWING METHODS. INSPECTOR & CONTRACTOR SHALL REVIEW ALL FIELD CONDITIONS PRIOR TO CONSTRUCTION AND VERIFY THAT THE INDICATED BORE UNITS ARE ACCURATELY IDENTIFIED, APPROPRIATELY LOCATED AND ACTUALLY REQUIRED (NOTIFY ENGINEER AND /OR OWNER OF ANY DISCREPANCIES). WITH A SIGNATURE ON THE STAKING SHEETS, THE APPROVAL OF THE PERMITTING AGENCY, WITH A SIGNATURE OF THE CONTRACTOR, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ELIMINATING, ALSO, NOTIFY ENGINEER AND /OR OWNER OF ANY DISCREPANCIES & ADJUSTMENTS, BUT ARE NOT INDICATED ON THE STAKING SHEETS.

- THE HANDHOLE/VAULT LOCATIONS INDICATED ON THE STAKING SHEETS ARE THE ENGINEER'S BEST ESTIMATE OF LOCATION FOR PLACING THE UNIT AS REQUIRED TO MEET CITY, JURISDICTIONAL REQUIREMENTS AND/OR TO AVOID SURFACE OR OTHER DAMAGE THAT MAY BE ASSOCIATED WITH TRADITIONAL TRENCHING OR FLOWING METHODS. INSPECTOR & CONTRACTOR SHALL REVIEW ALL FIELD CONDITIONS PRIOR TO CONSTRUCTION AND VERIFY THAT THE INDICATED BORE UNITS ARE ACCURATELY IDENTIFIED, APPROPRIATELY LOCATED AND ACTUALLY REQUIRED (NOTIFY ENGINEER AND /OR OWNER OF ANY DISCREPANCIES). WITH A SIGNATURE ON THE STAKING SHEETS, THE APPROVAL OF THE PERMITTING AGENCY, WITH A SIGNATURE OF THE CONTRACTOR, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ELIMINATING, ALSO, NOTIFY ENGINEER AND /OR OWNER OF ANY DISCREPANCIES & ADJUSTMENTS, BUT ARE NOT INDICATED ON THE STAKING SHEETS.
- CONTRACTOR SHALL PROVIDE COMPLETE AS-BUILT PLANS, WITH GPS COORDINATES IN NAD-83 FORMAT, WITH SUB-METER ACCURACY (NAD-83 COORDINATES, 1000.00000000, 0000.00000000, 0000.00000000) FOR ALL CONDUIT SPLICE POINTS, HANDHOLES AND ROAD CROSSING LOCATIONS. PER CVN SPECIFICATIONS.
- CONTRACTOR SHALL SUPPLY AND INSTALL (1) 16AWG SOLID COPPER TRACER WIRE (RED INSULATION) WITH 1.25" CONDUIT (IF NOT INCLUDED WITH FUTURE PATH CONDUIT). SPLICE AS REQUIRED WITH GEL-FILLED WIRE NUTS TO ASSURE CONTINUITY.

INDEX:


- SHEET 1 TITLE SHEET
SHEET 2 HANDHOLES AND CONDUIT DETAILS
SHEET 3 TYPICAL DETAILS
SHEET 4 TYPICAL TRAFFIC CONTROL PLANS
SHEET 5 PERMIT PLANS

CONTRACTOR NOTICE:

THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES SHOWN ON THESE PLANS WERE OBTAINED BY FIELD INSPECTION AND A SEARCH OF THE AVAILABLE CITY OR COUNTY RECORDS. SINCE THE ACTUAL LOCATION AND NATURE OF THE UNDERGROUND FACILITIES MAY BE SOMEWHAT DIFFERENT FROM THAT SHOWN, THE CONTRACTOR IS REQUIRED TO VERIFY THE INFORMATION THROUGH UNDERGROUND SERVICE ALERT (USA) OR BY CONTACTING THE UTILITY COMPANIES DIRECTLY, PRIOR TO EXCAVATION.

CVN GENERAL CONSTRUCTION NOTES:


- ALL CVN SUPPLIED MATERIAL TO BE PICKED UP BY CONTRACTOR AT CVN STORAGE YARD AT 1742 W. PINE, FRESNO, CA 93726 (NO FORKOUT IN YARD). CONTRACTOR TO RETURN ALL EXTRA OR UNUSED MATERIALS TO CVN YARD UPON COMPLETION OF THE PROJECT.
- MATERIAL TO BE INSPECTED BY CONTRACTOR AND CVN REPRESENTATIVE TO ENSURE QUALITY OF MATERIALS.
- CONTRACTOR TO WALK PROJECT AND CONFIRM TRENCH LOCATIONS, BORE LOCATIONS AND HANDHOLE/HANDHOLE LOCATIONS PRIOR TO THE START OF CONSTRUCTION. CONFIRM ANY PROPOSED CHANGES IN WRITING WITH CVN REPRESENTATIVE.
- CONTRACTOR TO INSTALL PER CVN SPECIFICATIONS AND DETAILS ATTACHED.
- CVN REPRESENTATIVE TO BE PRESENT TO INSPECT WORK PERFORMED FOR CVN AT CALTRANS AND RAILROAD CROSSINGS.
- UPON COMPLETION OF CONSTRUCTION, CONTRACTOR TO CLEAN AND PROOF ALL DUCTS TO ENSURE PROPER INSTALLATION.
- CONTRACTOR TO PLUG ALL CONDUITS PLACED USING SUPPLIED CONDUIT PLUGS.
- CONTRACTOR SHALL SUPPLY AND INSTALL (1) 16AWG SOLID COPPER TRACER WIRE (RED INSULATION) WITH 1.25" CONDUIT (IF NOT INCLUDED WITH FUTURE PATH CONDUIT). SPLICE AS REQUIRED WITH GEL-FILLED WIRE NUTS TO ASSURE CONTINUITY.
- CONTRACTOR SHALL SUPPLY AND INSTALL MULE TAPE IN 1.25" HOPE DUCT CONTINUOUS FROM FROM BEGINNING TO END. PROVIDE 30' SLACK AT BEGINNING AND END HANDHOLES.
- WARNING SIGNS AND DECALS SHALL BE SUPPLIED BY OWNER. CONTRACTOR SHALL NOTIFY OWNER OF ALL HANDHOLES AND CONDUIT SPLICES AS THAT QUANTITY IS NOT ACCOUNTED FOR IN THE BID UNIT QUANTITY SUMMARY.
- CONTRACTOR SHALL POST FIBER WARNING SIGNS EVERY 450' IN BUREAU AREAS AND 1-120' IN URBAN AREAS. AT EVERY HANDHOLE BOTH SIDES OF ROAD CROSSING AND CHANGES IN DIRECTION, CONDUIT SPLICE LOCATED BETWEEN HANDHOLES (EXCEPT IN SIDEWALKS OR OTHER INFRASTRUCTURE URBAN AREAS), MARKERS SHALL BE PLACED IN AS CLOSE PROXIMITY AS POSSIBLE TO PERMANENT OBJECTS TO PROVIDE PROTECTION, WITHOUT OBSCURING THE MAKER FROM VIEW. MARKERS SHALL BE ORIENTATED AND PLACED FOR MAXIMUM VISIBILITY. IN RURAL AREAS THE DECAL SHALL FACE UNCOMING TRAFFIC TO BE VISIBLE TO A DRIVER.
- CONTRACTOR SHALL PROVIDE COMPLETE AS-BUILT PLANS TO IDENTIFY RUNNING LINE LOCATION. PROVIDE GPS COORDINATES IN NAD-83 FORMAT, WITH SUB-METER ACCURACY (NAD-83 COORDINATES, 1000.00000000, 0000.00000000, 0000.00000000) FOR ALL CONDUIT SPLICE POINTS, HANDHOLES, CHANGES IN DIRECTION AND ROAD CROSSING LOCATIONS, PER CVN SPECIFICATIONS.
- CONTRACTOR SHALL PROVIDE CERTIFICATION LETTER STATING THAT ALL CONDUITS AND HANDHOLES HAVE BEEN INSTALLED, CLEANED AND TESTED PER CVN SPECIFICATIONS.
- CONTRACTOR SHALL PROVIDE CERTIFICATION LETTER STATING THAT TRACER WIRE HAS BEEN INSTALLED PER CVN SPECIFICATIONS AND TESTED TO CONFIRM CONTINUITY FROM BEGINNING TO END.

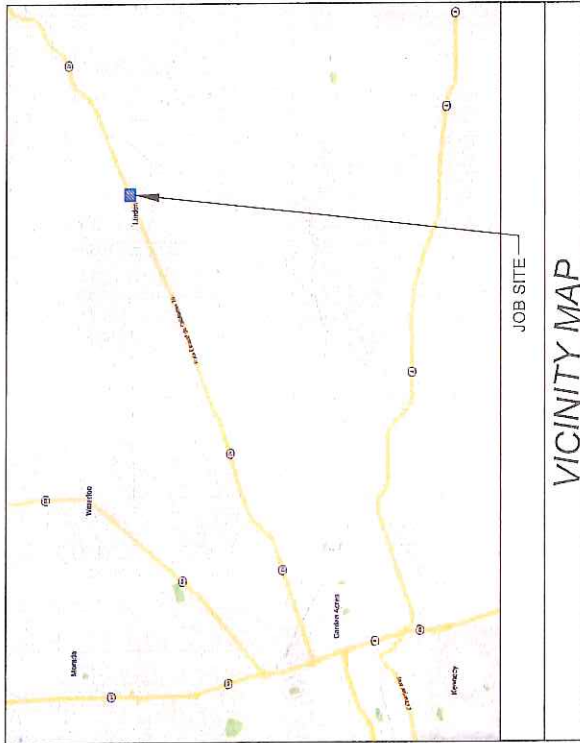



COUNTY OF SAN JOAQUIN
DEPARTMENT OF PUBLIC WORKS

APPROVED AS "ENCROACHMENT PERMIT PLAN SET"
APPROVED FOR WORK WITHIN COUNTY RIGHT-OF-WAY ONLY

ACCEPTED: _____ DATE: _____
RCE NO.: _____ EXP. DATE: _____
ENCROACHMENT PERMIT NO. _____ DATE ISSUED: _____





DATE	3/25/19	WORK ORDER	5039
SCALE	1" = 5'	3 CTS	1

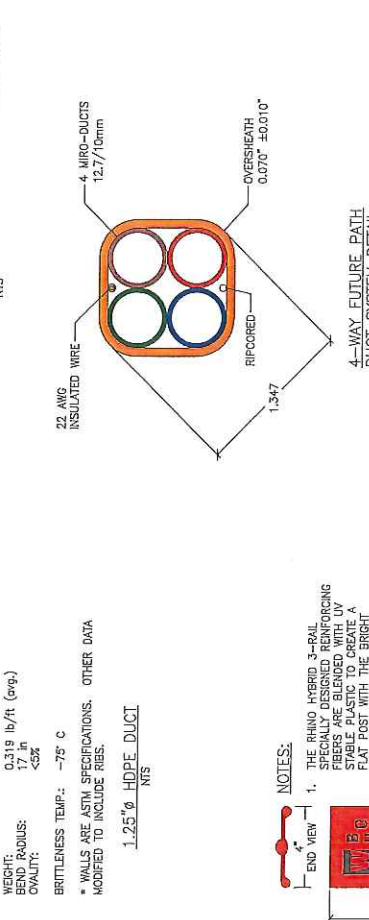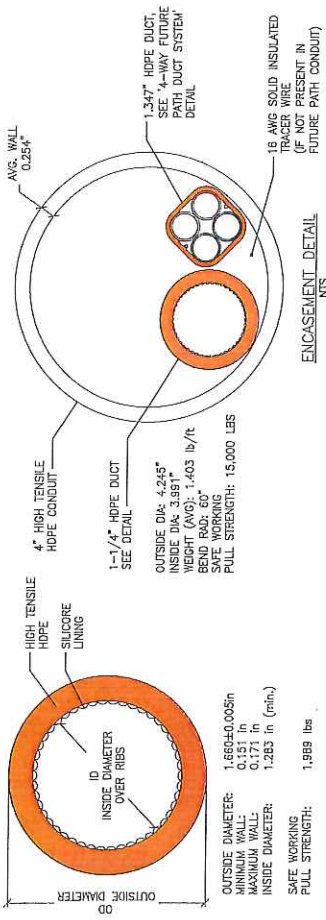

NOTES:

- THE RHINO HYBRID 3-RAIL SPECIALLY DESIGNED REINFORCING FIBER IS BLENDED WITH UV STABILIZER TO PROVIDE A FLAT POST WITH THE BRIGHT COLOR OF PLASTIC AND THE IMPACT RESISTANCE OF THE COMBINED FIBERGLASS AND POLYESTER. THIS ALLOWS THE POST TO BE SNAP BACK INTO ITS NORMAL UPRIGHT POSITION.
- CONTRACTOR IS RESPONSIBLE FOR 3-RAIL WARNING SIGNS PER MANUFACTURER'S INSTALLATION STANDARDS. EVERY 4240 FEET (1/2-MILE) IN RURAL AREAS AND (1/2-MILE) IN URBAN AREAS EVERY 1220 FEET (1/4-MILE). ANY CONDUIT SPICE LOCATED BETWEEN HANDHOLES (EXCEPT IN URBAN AREAS) TO ENSURE THE FIBER AND STRUCTURE CAN BE MAINTAINED AND IS NOT DAMAGED IN THE FUTURE.
- WARNING SIGNS AND DECALS SHALL BE SUPPLIED BY OWNER. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL RAIL CONDUIT SPICES AS THAT QUANTITY IS NOT ACCOUNTED FOR IN THE BID UNIT QUANTITY SUMMARY.

WARNING SIGN - RHINO 3 RAIL FIBER OPTIC CABLE MARKER
 NTS

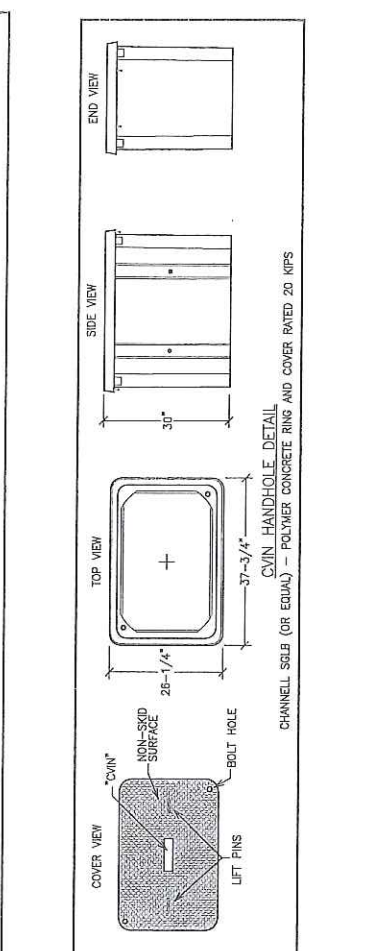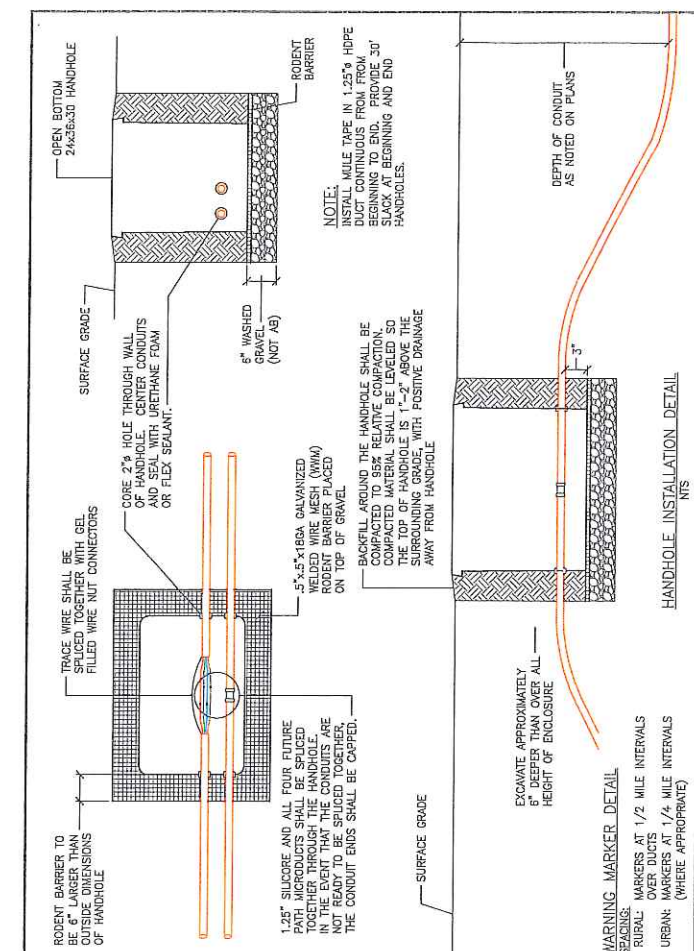





WARNING SIGN - RHINO 3 RAIL FIBER OPTIC CABLE MARKER
 NTS

811 DIGALERT
 CALL TOLL FREE (811) 48 HOURS BEFORE ANY EXCAVATION UNDERGROUND SERVICE ALERT

CVIN
 7447 N. Palm Bluffs Ave., Ste. 105, Fresno, Ca. 93711

SAN JOAQUIN COUNTY PERMIT PLANS
 DATE: 3/25/19
 WORK ORDER: E088
 SCALE: 1"=10'
 SHEET: 2 OF 5

INSTALLATION OF FIBER OPTIC CONDUITS FOR VERIZON WIRELESS - LINEN
 19445 E SR 26, LINEN, CA

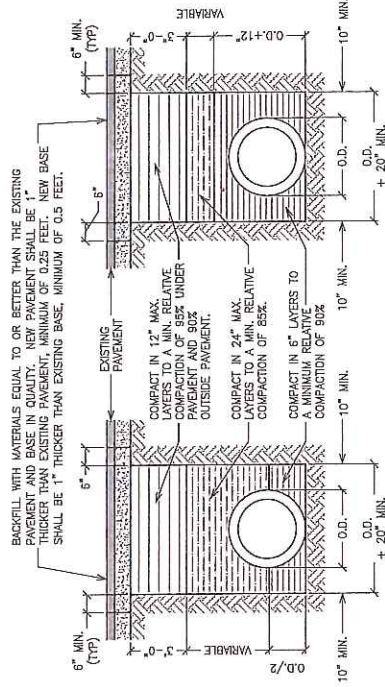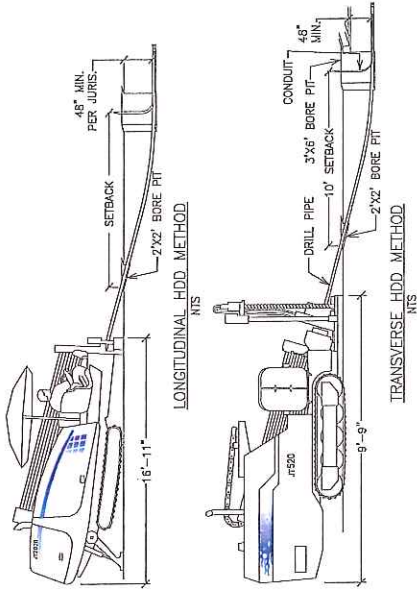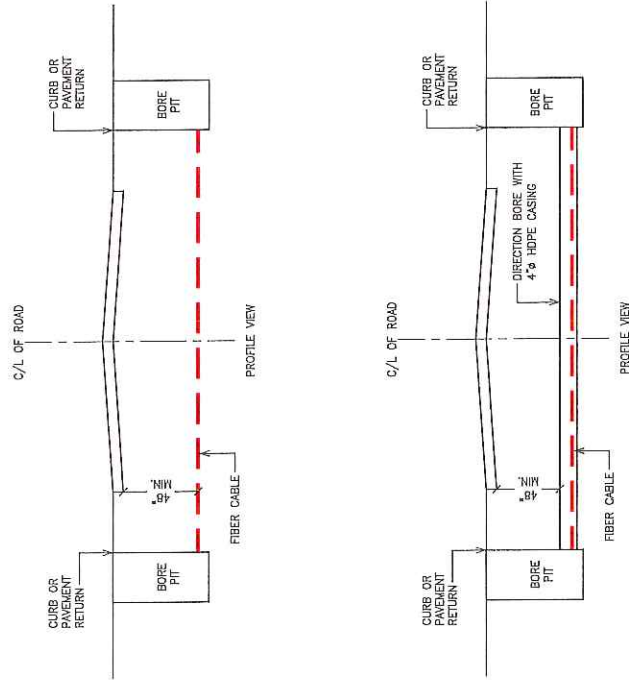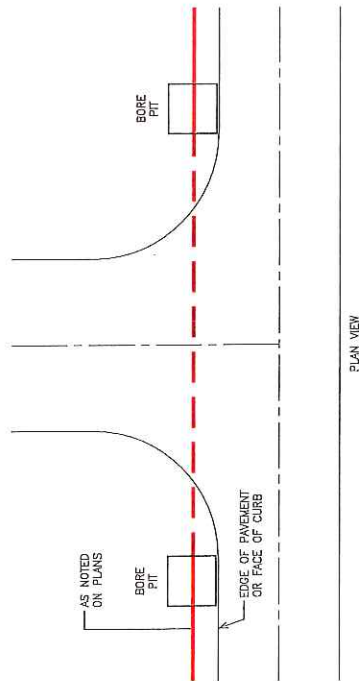

BACKFILL WITH MATERIALS EQUAL TO OR BETTER THAN THE EXISTING PAVEMENT AND BASE IN QUALITY. NEW PAVEMENT SHALL BE 1" THICKER THAN EXISTING PAVEMENT, MINIMUM OF 0.25 FEET. NEW BASE SHALL BE 1" THICKER THAN EXISTING BASE, MINIMUM OF 0.5 FEET.

COMPACT IN 12" MAX. LAYERS TO A MIN. RELATIVE COMPACTION OF 95% UNDER PAVEMENT AND 90% OUTSIDE PAVEMENT.

COMPACT IN 24" MAX. LAYERS TO A MIN. RELATIVE COMPACTION OF 85%.

COMPACT IN 8" LAYERS TO A MINIMUM RELATIVE COMPACTION OF 80%.

CONDUIT IN 24" MAX. LAYERS TO A MIN. RELATIVE COMPACTION OF 95%.

CONDUIT IN 8" LAYERS TO A MINIMUM RELATIVE COMPACTION OF 80%.

CONDUIT IN 24" MAX. LAYERS TO A MIN. RELATIVE COMPACTION OF 95%.

CONDUIT IN 8" LAYERS TO A MINIMUM RELATIVE COMPACTION OF 80%.

BORE PITS / RECEIVING PITS

- ALL BORE/RECEIVING PITS SHALL BE STEEL PLATED WHEN NOT IN USE.
- ALL BORE/RECEIVING PITS THAT ARE WITHIN THE CLEAR RECOVERY ZONE NEED TO BE PROTECTED BY K-RAIL AND CRASH CUSHIONS.
- BORE/RECEIVING PITS SHALL ONLY BE OPEN FOR 2-3 HOURS MAXIMUM AND FILLED IN COMPLETELY BEFORE THE END OF EACH WORK DAY.
- BORE PITS ARE AREA STANDARD 1'-FT WIDE BY 4'-FT LONG AND 4'-FT DEEP.
- RECEIVING PITS ARE A STANDARD 3'-FT WIDE BY 3'-FT LONG AND 4'-FT DEEP.
- ALL BORE/RECEIVING PITS SHALL BE SURROUNDED BY CONTINUOUS STRAW WATLES AS REQUIRED PER SWPPP.

NOTES:

- REFERENCE SAN JOAQUIN STANDARD DRAWING R25 FOR TRENCH BACKFILL AND COMPACTION REQUIREMENTS.
- RELATIVE COMPACTION OF MATERIALS SHALL BE TESTED IN ACCORDANCE WITH THE STATE OF CALIFORNIA, DEPT. OF TRANSPORTATION TESTING MANUALS TEST METHOD NO. CALIFORNIA 216 OR 231.
- ALL EXISTING PAVEMENT SHALL BE NEATLY CUT TO LINE PRIOR TO TRENCH EXCAVATION.
- WHEN SHOWN BY SOIL COMPACTION AND COMPACTION ANNOTATION PERCENT (90%) COMPACTION MAY BE USED, WHEN APPROVED BY THE DIRECTOR OF PUBLIC WORKS.
- SPECIAL BEDDING REQUIREMENTS MAY BE SHOWN ON THE PLANS OR SPECIFIED IN SPECIAL PROVISIONS.
- SHOULDERS SHALL BE AS SHOWN ON THE PLANS OR SPECIFIED IN SPECIAL PROVISIONS. SHOULDERS SHALL BE LESS THAN THREE FEET WIDE AS MEASURED FROM THE EDGE OF PAVEMENT.
- SETTING OR PONDING WILL BE PERMITTED WITH IN THE STREET RIGHT-OF-WAY WITH A 3-YEAR BOND, WHEN APPROVED BY THE DIRECTOR OR PUBLIC WORKS

811 DIGALERT
CALL BEFORE YOU DIG
FOR A FREE SERVICE ALERT

CVIN
7447 N. Palm Bluffs Ave., Ste. 105, Fresno, Ca. 93721

SAN JOAQUIN COUNTY PERMIT PLANS
INSTALLATION OF FIBER OPTIC CONDUITS FOR
VERIZON WIRELESS - LINDEN
19445 E. SR.26, LINDEN, CA

DATE: 3/25/19
WORK ORDER: 5089
SHEET: 3 OF 5


TYPICAL BORE DETAIL AT STREET INTERSECTION
NOT TO SCALE

SUGGESTED ADVANCE WARNING SIGN PLACEMENT



SPEED (MPH)	MINIMUM TAPER LENGTH FOR WIDTH OF OFFSET 12 FT (W)			BUFFER SPACE (FT)
	MERGING (FT)	SHIFTING (FT)	SHOULDER STREAM (FT)	
20	80	40	27	100
25	125	63	42	100
30	180	90	60	100
35	245	123	82	100
40	320	160	107	100
45	540	270	180	100
50	800	350	220	100
55	880	350	220	100
60	720	350	240	100
65	780	380	260	100
70	840	420	280	100
DISTANCE BETWEEN SIGNS**				
ROAD TYPE	A			C
	B			
URBAN (LOW SPEED) 25 MPH OR LESS	100			100
URBAN (HIGH SPEED) 35 MPH OR MORE	250			250
URBAN (HIGH SPEED) 45 MPH OR MORE	350			350
RURAL	500			500
EXPRESSWAY/FREWAY	1,000			2,540

** SPEED CATEGORY TO BE DETERMINED BY HIGHWAY AGENCY.

DISTANCES SHOWN IN FEET. THE A DIMENSION IS THE DISTANCE FROM THE TRANSITION OR POINT OF RESTRICTION TO THE FIRST SIGN. THE B DIMENSION IS THE DISTANCE BETWEEN THE FIRST AND SECOND SIGNS. THE C DIMENSION IS THE DISTANCE BETWEEN THE SECOND AND THIRD SIGNS. (THE THIRD SIGN IS THE FIRST SIGN IN A THREE-SIGN SERIES ENCOUNTERED BY A DRIVER APPROACHING A TTC ZONE).




TYPICAL LANE CLOSURE

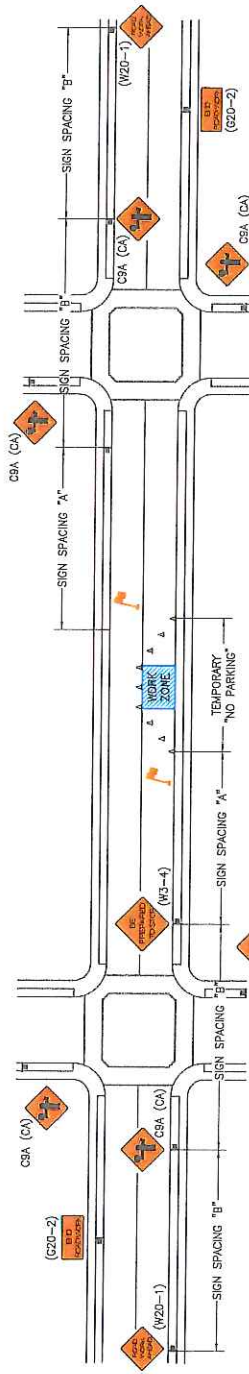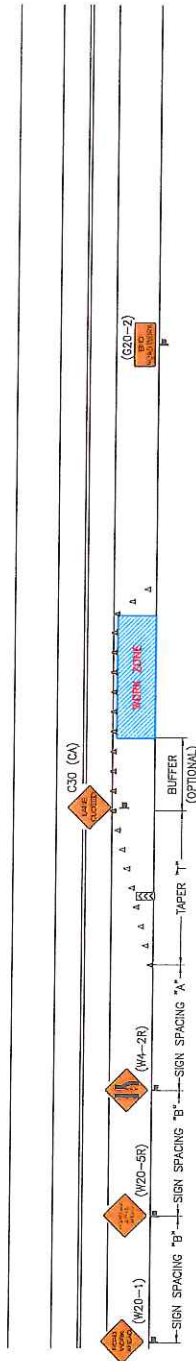


TRAFFIC CONTROL PLAN
TYPICALS
RESIDENTIAL
ROAD - FLAGMEN


TYPICAL TCP "A" - SIDEWALK CLOSURE

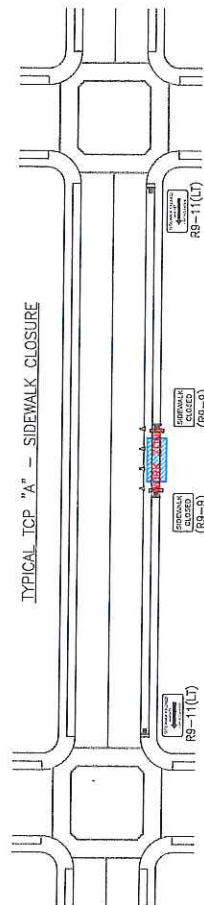

TYPICAL TCP "B" - SHOULDER WORK

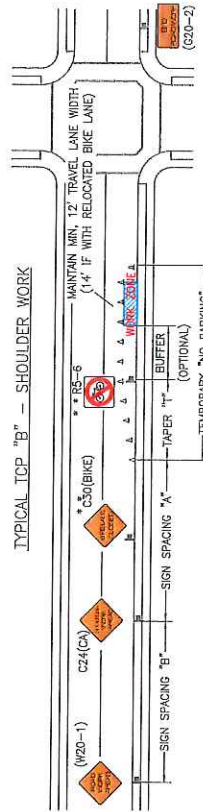


TRAFFIC CONTROL PLAN TYPICALS
EDGE OF ROAD WORK ZONE



SAN JOAQUIN COUNTY PERMIT PLANS
INSTALLATION OF FIBER OPTIC CONDUITS FOR
VERIZON WIRELESS - LINDEN
19446 E. ST. 28, LINDEN, CA

DATE: 3/25/19
SHEET: 4 of 5

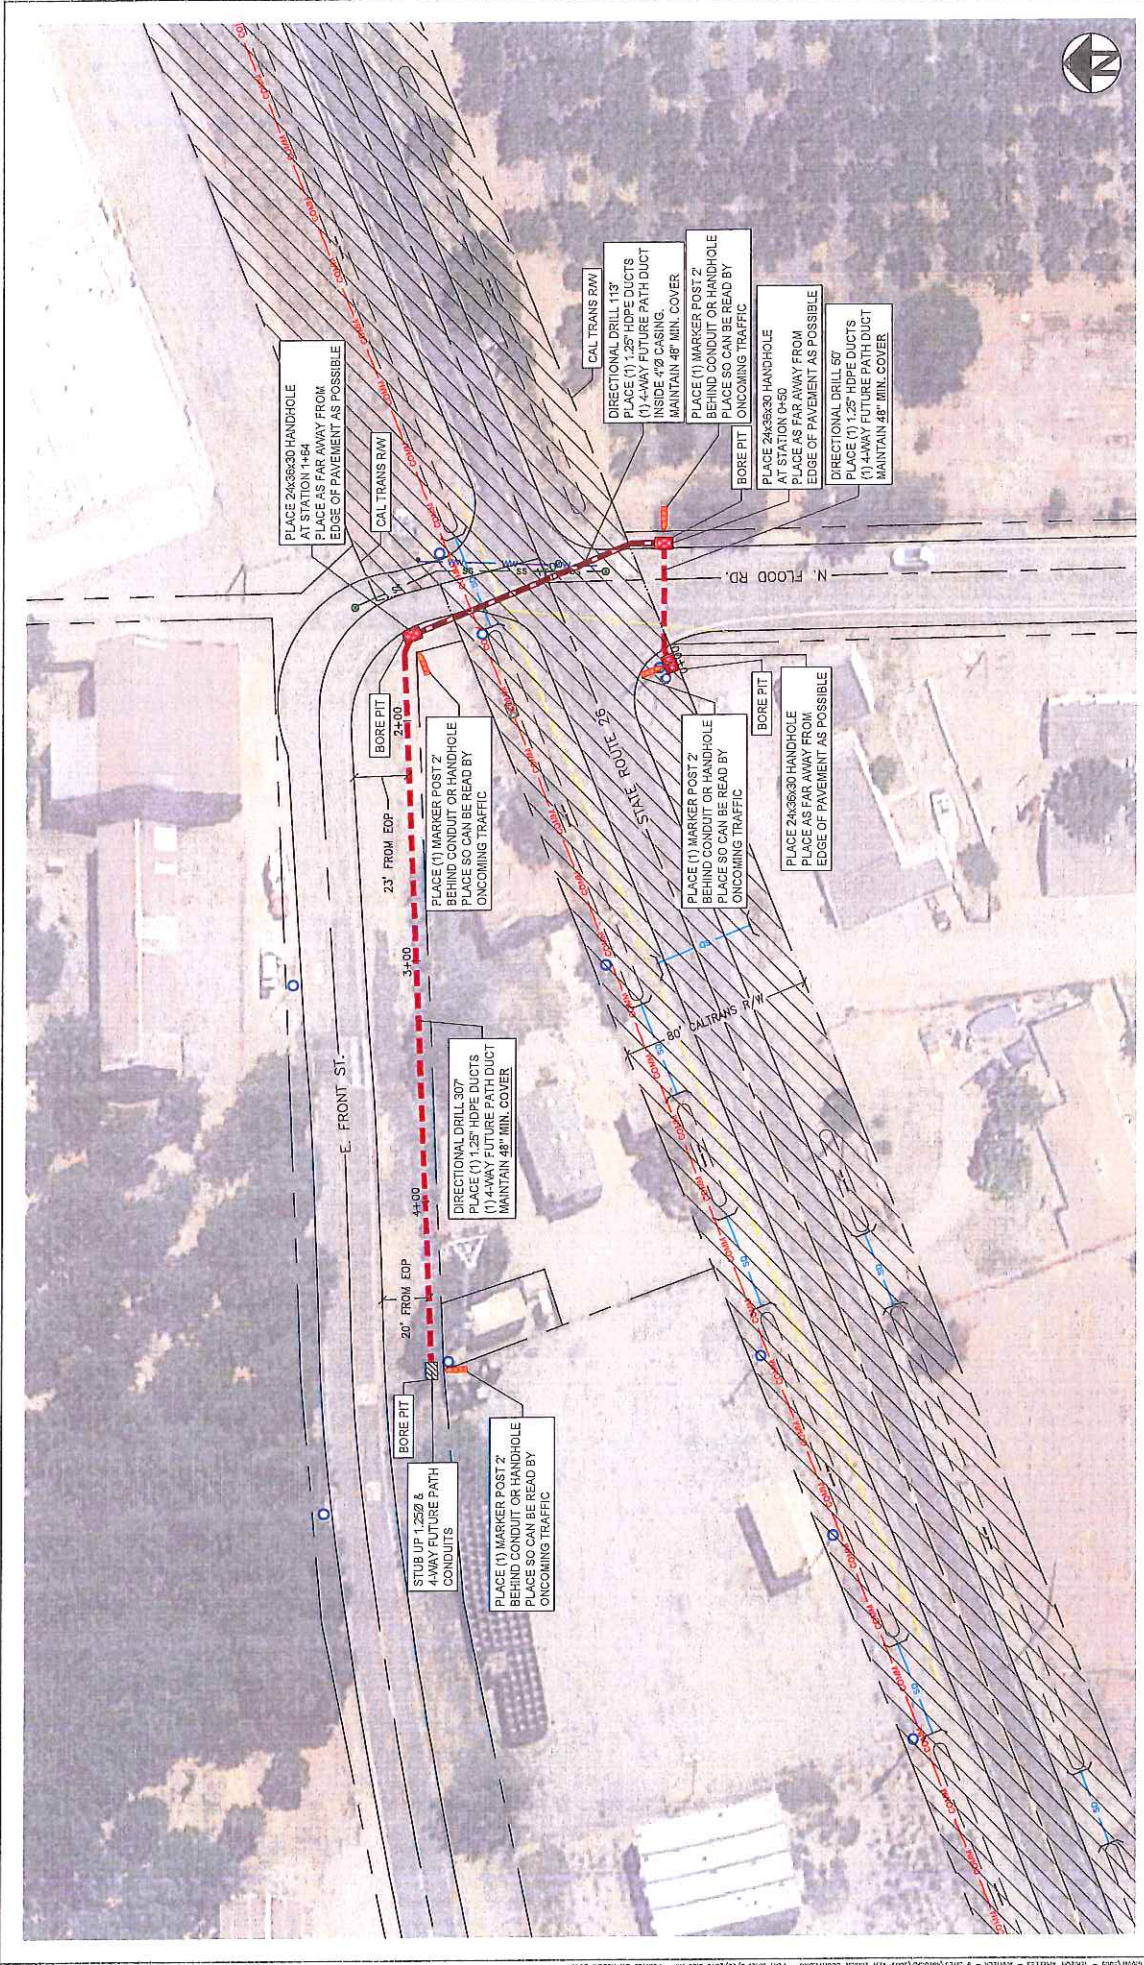



CALL TOLL FREE
(811) 48 HOURS
FOR SERVICE ALERT

CVIN

7447 N. Palm Bluffs Ave., Ste. 105, Fresno, Ca. 93711

SAN JOAQUIN COUNTY PERMIT PLANS

INSTALLATION OF FIBER OPTIC CONDUITS FOR
VERIZON WIRELESS - LINDEN


19446 E SR 26, LINDEN, CA

DATE: 9/25/19

WORK ORDER: 5059

SCALE: 1" = 50'

SHEET: 5 of 5

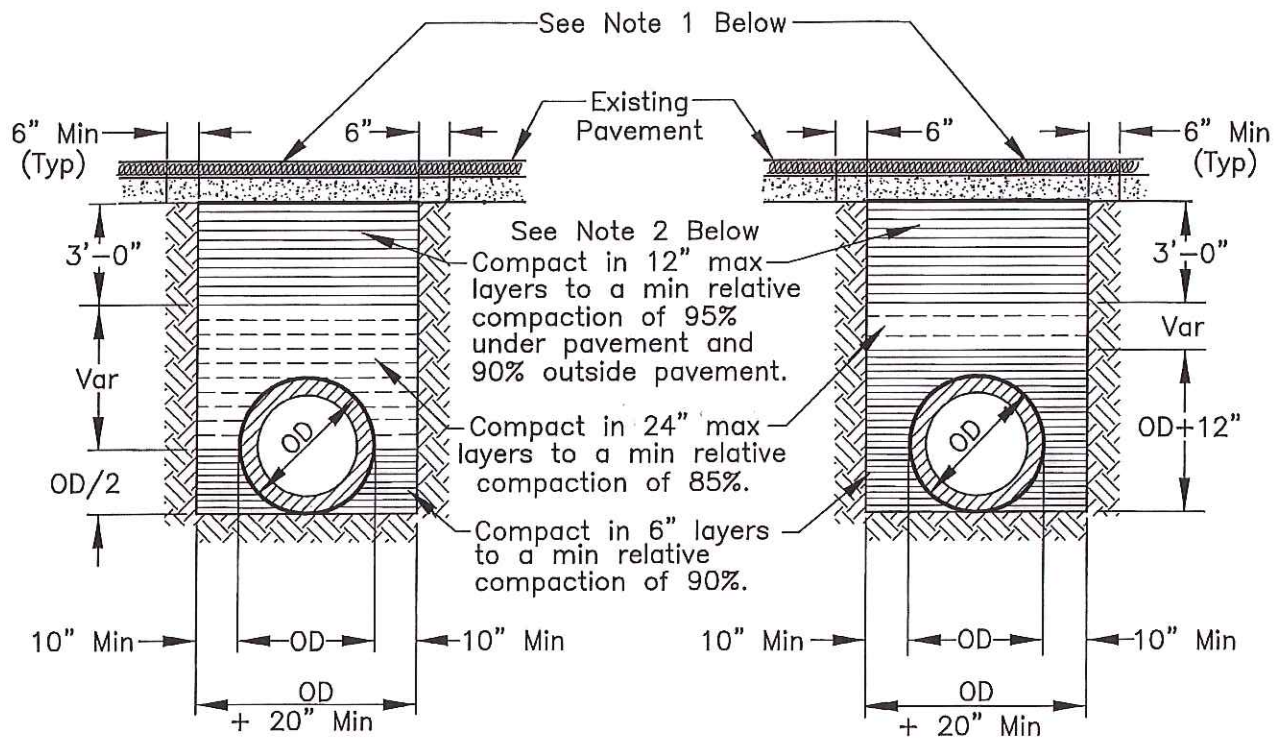


RIGID CONDUIT

FLEXIBLE CONDUIT

NOTES:

1. New pavement shall be 1" thicker than existing pavement, minimum of 0.25 Ft. New base shall be 1" thicker than existing base, min of 0.50 Ft.
2. Select native material or imported granular material as approved by the Director of Public Works. Backfill with materials equal to or better than the existing pavement and base in quality.
3. Relative compaction of materials shall be tested in accordance with the State of California, Dept. of Transportation Testing Manuals, test method No. California 216 or 231.
4. All existing pavement shall be neatly cut to line prior to trench excavation.
5. Jetting or ponding will be permitted within the street right-of-way with a 3 year bond, when approved by the Director of Public Works.
6. When shown by soil composition and compactability, ninety percent (90%) compaction may be used, when approved by the Director of Public Works.
7. Special bedding and backfill requirements may be shown on the plans or specified in the special provisions.

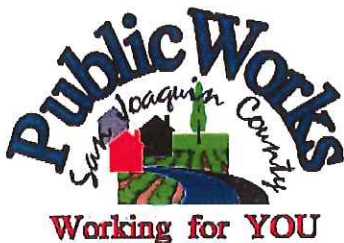

TYPICAL TRENCH BACKFILL

COUNTY OF SAN JOAQUIN
DEPARTMENT OF PUBLIC WORKS

Date: DEC 2014

Approved by:

Thomas M. Galt

No.	Revision	Description	Date

Std. Dwg. No.

R-29

GENERAL PROVISIONS

GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

PUBLIC CONVENIENCE AND SAFETY:

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
 - 1. Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
 - 2. In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.
 - a. The County of San Joaquin Public Works Department
 - b. The County of San Joaquin Sheriff's Office
 - c. The local postal service
 - d. The local fire district
 - e. The local school district
 - f. The local residents involved
- B. Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- C. Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark.
- D. Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and Transportation Officials (AASHTO) designations.
 - 1. For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M 170M.
 - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class III.
 - 3. Plastic pipe conforming to AASHTO Designation M294.
- B. All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1.06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- C. Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- D. All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- E. The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be installed.
- F. All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- A. All excavations shall be backfilled and compacted immediately after work therein has been completed.
- B. Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the Engineer.
- C. Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- D. Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one foot where 90% compaction is required, and two feet where 80% compaction is required.
- E. No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- F. Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full depth of the lift.
- G. All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- H. All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
 - 1. Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch (1/2") maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
 - 2. Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- I. Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
 - 1. If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
 - 2. Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- J. Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

SPECIAL PROVISIONS

Winter Weather Utility Work

1. **SUPERVISION:** The utility company (**permittee**) shall furnish full-time supervision of all work to insure compliance with the permit provision.
2. **START OF WORK:** No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
3. **CLEAN PAVEMENT:** Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
5. **WEATHER-TIGHT CONDITIONS:** All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.