

COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS

P.0. BOX 1810-1810 E. HAZELTON AVENUE STOCKTON, CALIFORNIA 95201 (209) 468-3000 FAX # (209) 468-9324 Permit No: PS-1901147
Date Issued: 04/16/2019
Start Date: 05/13/2019
Exp. Date: 08/01/2019
Project No: PWP7110005

Quad:

ENCROACHMENT PERMIT

To: COMCAST

12687 S MANTHEY RD LATHROP, CA 95330

Encroachment Type:		
TCP		

Location:

W/S N EXTENSION RD 300' S/O E HARNEY LN

In compliance with your request of $\underline{04/16/2019}$, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:			
Traffic Control Per MUTCD			

FORMS: SS/WW, R-29

Est. Permit Fee: \$490.00

KRIS BALAJI, Director Department of Public Works

WHITE

-Permittee

GOLDENROD

-PWD Central File

YELLOW PINK -Field Inspection -Permit Section By:

Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:

STREETS AND HIGHWAYS CODE

- 1. Division 1, Chapter 3
- 2. Division 2, Chapter 2, Section 942
- 3. Division 2, Chapter 4, Section 1126
- 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

- 2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
- 3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
- 4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
- 5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
- 6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
- 7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
- 8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
- 9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.
- 10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
- 11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
- 12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
- 13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:			*	
Date 3-26-19		OFFICE L	JSE ONLY	
To: San Joaquin County Department of Public Works	JOB#	110005	REF # CR #	
COMCAST/CNEIS PERRY (Applicant Name)	EXP. DATE VALID STREET AREA	TO		DRIVEWAYS:
(Mailing Address) LATHROP CA 95330 (City, State, Zip Code)	TYPE FORMS NOTES			*
(925) 783-4877 (Area Code - Telephone Number)				
SEE	ATTACA	ied	.es	
The undersigned hereby applies for permission to excavate, or the west side of N. EXTENSION of E. HARNEY LN , WITTAFFIC CONTROL TO PLA	app	otherwise encroach or oroximately 300 oroximately , by performing the fo	llowing work (des	mile <u>sot/</u> 1 cription of work):
Work will commence on or about 5-13-19	p property or or	for approximately _		
I, the undersigned, certify that I am the owner of the respective work described above in accordance with the rules and regulated the second s	tions of San Jo	aquin County and subj	ect to inspection	
Signature of Applicant - Title	.1.019	3-2 Dat	е	

13451 N Extension Rd Lodi, CA 95242

Scope Of Work,

Tie onto pole 1 and overlash to pole 3.



CONTACTS

<u>SEFNCO:</u> Rodney Cramer 916-926-1826

VICINITY MAP



CONSTRUCTION TYPE: OVERLASH SYSTEM: PROJ#: 280143 E Parish

13451 N Extension Rd

APPROVED: APPROVED: APPROVED: DRAWN BY: DESIGN:

Cover Sheet Legends & General Notes Site Plan Traffic Cortrol Plan Typical Detail Page Pedestrian Detour/Escort Plan

LEGEND

Overlash Footage

BUILD

REV	DESCRIPTION	DAT
	SEFNCO	3/22/2


REV	DESCRIPTION	DATE
	SEFNCO	3/22/2019


-	LINETYPES		£	GENERAL NOTES:	FIBER PLACEMENT NOTES:
		PROPOSED TRENCH/BORE ROUT	ш	1. ALL VAULTS / HANDHOLES TO BE EQUIPPED WITH SECURITY LIDS WITH LOCKING BOLTS.	1. CONTRACTOR IS RESPONSIBLE FOR LOCATING AL
		EXISTING COMCAST ROUTE		2. GROUND RESTORATION/RIGHT-OF-WAY SHALL BE RESTORED TO ORIGINAL OR BETTER CONDITION.	SEE LOCAL DIRECTORY FOR CONTACT TELEPHON LOCAL CALL BEFORE YOU DIG AGENCY.
		EXISTING ELECTRICAL SYSTEM		 ALL 90 DEGREE BENDS IN CONDUIT CONSTRUCTION WILL BE A MINIMUM OF 36" RADIUS UNLESS SPECIFIED OTHERWISE. 	2. CONTRACTOR SHALL RECORD SEQUENCE # OF FI
	a 2	EXISTING GAS SYSTEM EXISTING TV SYSTEM		4. BURIED FIBER OPTIC WARNING SIGNS SHALL BE PLACED AT EACH SIDE OF ALL ROAD CROSSINGS. AT CULVERTS, DITCHES AND IN A STRAIGHT LINE OF SIGHT SPACING OF APPROXIMATELY 500 FEET.	EVERY WORK POLE, MANHAULE, FIBER STORAGE AND TAIL LOCATION, CONTRACTIOR TO RROWING MANAGER WITH SEQUENCE NUMBERS AT PROJECT
		EXISTING IRRIGATION SYSTEM		 DEVIATIONS FROM THE ENGINEERED ROUTE REQUIRES A PROJECT MANAGER AND RIGHT-OF-WAY OWNER OR CARETAKER APPROVAL PRIOR TO CONSTRUCTION. 	COMPLETION. 3. SLACK LOOP AND SNOWSHOE STORAGE LOCATIC
· p·	E R	EXISTING SANITARY SEWER EXISTING STORM DRAIN		6. WHERE PERMITS FROM STATE, COUNTY, CITY, RALROAD OR GOVERNMENT AGENCIES ARE REQUIRED, ALL WORK PERFORMED WILL COMPLY WITH THESE AGENCIES STANDARD SPECIFICATIONS.	DETERMINED ON CONSTRUCTION DRAWINGS. HO REEL LENGTHS OF FOUR HUNDRED FEET (300°) OR COUNT FIBRE OR THREE HUNDRED FEET (300°) OR ON SMALL COUNT FIBER ARE DIFFICULT TO USE A
		EXISTING WATER LINE EXISTING FENCELINE ROADWAY CENTER LINE		7. THE PROJECT MANAGER WILL NOTIFY BUILDING MANAGEMENT WHEN WORK WILL BEGIN ON BULLDING, CONTRÁCTOR TO COORDINATE ROOM ACCESS AND WORK START AND STOP TIMES WITH BULLDING MANAGOR TO COMEMENT.	PLACED AS FSL'S, NOT CUT AND RETURNED. 4. FIBER OPTIC IDENTIFICATION TAGS SHALL BE PLA WORK POLE, MANHOLE, FIBER, STORAGE LOOPS,
		PROPERTY LINE		8. THE PROJECT WANAGER IS TO BE NOTHERD BY THE CONTRACTOR 24 HOURS PRIOR TO CONSTRUCTURE. SEE COMPANY CONTRACT LIST FOR CONTRACT NAME(s) AND TELEPHONE NUMBER(q).	CASES AND WHERE INDICATED BY PROJECT MAN NEED TO BE PLACED SO AS TO BE READ FROM THE OF THE PROJECT SO. CABLE LUBRICATION SHALL BE USED TO REDUCE
	CAST	IONS PL PROPERTY LINE PUE PUBLIC UTILITY EASEMENT		9. THE PROJECT MANAGER WILL RESERVE THE RIGHT TO INSPECT AT ANY TIME THE WORK BEING PERFORMED BY THE CONTRACTOR. IF PROJECT MANAGER DETERMINES THAT THE WORK IS NOT REING PREFORMED TO MINIMUM QUALITY STANDARDS. THEN THE CONTRACTOR SHALL PROVIDE REWORK AT HIS OWN OSST.	TENSION, LUBRICANTS MUST NOT CONTAÎN ANY PRODUCTS. 6. A 100 FOOT FIBER COIL MUST REMAIN IN ALL VAU OTHERWISE NOTED.
		R/W RIGHT OF WAY SD EXISTING STORM DRAIN SS EXISTING SANITARY SEWER		10. ANY CHANGE IN PROJECT SCOPE, INCLUDING BUT NOT LIMITED TO, CONDUIT LENGTH, CONDUIT PATH, AERIAL PATH ETC., MUST BE APPROVED BY THE PROJECT MANAGER.	7. ALL BURIED INFRASTRUCTURE MUST BE ACCOMP WARNING TAPE AND A TRACER WIRE, AT RISER I I CAATE MIDG ELIALI DE ACCESSIBLE AT THE BAS
	MAX MAXIMUM CDT CONDUIT	T EXISTING TELEPHONE W EXISTING WATER		 ALL CORING/CONSTRUCTION THAT WILL CAUSE NOISE AND/OR VIBRATION SHALL BE DONE WITHIN ALLOWED (9AM-3PM) BUSINESS HOURS. 	8. ALL RISERS WILL BE CAPPED AT ALL TIMES.
	á	SIGNAN	8	12. ANY AND ALL UNDERGROUND UTILITIES ENCOUNTERED ARE THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE, PROTECT, AND REPAIR, IF DAMAGED.	9. ALL FIBER SHALL BE MARKED AS TO DIRECTION IN RED-NORTH, GREEN-SOUTH, YELLOW-EAST, AND
©	NEW COMCAST POWER SUPPLY NEW COMCAST LOW PROFILE	TRANSFORMER		 ALL FOOTAGES ARE BASED ON FIELD GATHERED MEASUREMENTS, AS SUCH SOME VARIANCE SHOULD BE ANTICIPATED. ADJUST AS NEEDED. 	BLUE-WEST. DO NOT TAPE FIBER CABLES FOGE
Ä	POWER SUPPLY W/ METER	٩		 ALL BURIED CONDUTICABLE WILL BE PLACED AT 35" MINIMUM COVER. SITE HAS POTENTIAL FOR FOCK THAT WOULD PREVENT THE ABILITY TO PROVIDE THE MINIMUM COVER. IN CASES WHERE 	
	NEW COMCAST VAULT	TRAFFIC SIGNAL COMBINATION	NO	THE MINIMUM COVER CAN NOT BE ACHIEVED, THE CONDUIT SHALL BE PLACED IN A SCH 40 EMT SLEEVE OR APPROVED EQUIVALENT.	I IS THE RESPONSIBILITY OF THE CONSTRUCTION OF THE CONSTRUCTION OF THE PROPERTY OF WAY BEFORE CONSTRUCTION REPRESENT OF WAY BEFORE THE WORLD WAY BEFORE THE WORLD WAS TALLATION REPRESENTED FOR THE PROPERTY OF THE PROPERTY O
	NEW COMCAST PEDESTAL	Ó FIRE HYDRANT		 WATER, SEWER, STORM SEWER AND EASEMENT LOCATIONS ARE BASED OFF OF CITY MAPS, MAY EIGH IN VERDIFIED 	
	BORE PIT	△ MONUMENT MONUMENT		NOT FIELD VERLIFIED. 16. BORING OF AC PAVING IS REQUIRED AT ALL LOCATIONS AS INDICATED ON PLANS.	2. THE UNDERGROUND ROUTE DEPICTED IS PRELIM WILLMAY VARY ONCE UTILITIES HAVE
δ (NEW RISER ATTACHED TO POLE			17. AT NO TIME SHALL CURBS, GUTTERS OR HANDICAP BE DISTURBED.	BEEN FIELD LOCATED. 9 AMICHOPING END THE ABOM CONSTRUCTION IS
8	EXISTING POLE			18. DOOR HANGERS ARE TO BE PLACED A MINIMUM OF 72 HOURS PRIOR TO START OF CONSTRUCTION.	5. ANCHORING TON THE AENAL CONSTRUCTION IS DETERMINED DURING CONSTRUCTION AND IS COLLECTED IN THE ASSETT TO THAT THE PRACE
	EXISTING COMCAST VAULT EXISTING COMCAST PEDESTAL	(W) WATER MANHOLE (S) SANITARY SEWER MANHOLE		19. PRIOR TO START OF CONSTRUCTION, CONTRACTOR SHALL PLACE MESSAGE BOARDS STATING. LLANE CLOSIRES, AND DELAYS A WEFK IN ADVANCE. LOCATION OF THE MASSAGE BOARD SHALL BE	AND IS COLLECTED IN THE ACCOUNT.
0	EXISTING IRRIGATION VAULT	© SEWER CLEAN OUT			
0	EXISTING UTILITY VAULT/PEDESTAL	© ELECTRIC MANHOLE		20. LANE GLOSURERS GANNOT EXCRED MORE THAN 300 FT. AT A TIME. FOR SAFETY PURPOSES THERE SHALL BE ONLY ONE GLOSURE AT A TIME ALLOW INTERNATIONAL BLVD. MORE FLAGGERS WILL BE NICESSARY TO HELP VEHICLES AND PEDESTRIANS IN THE WORK ZONES DIRING THE LANE.	
X	GAS/WATER VALVE	© UNIDENTIFIED MANHOLE		CLOSURES,	
♦	TREE/BUSHES	W WATER METER			is the second
		G GAS METER			
-	AST DOCUME	& CONFIDEN		IMPORTANT NOTICE	
DESIGN:	REV DESCRIPTION	N DATE	□ {	n # 4216/4217 of the Cov	GENU & GENULIVAL
DRAWN BY:		/ /-		dentification Number to be issued before a excavate will be valid For your Dig Alert I.D.	#: 280143
APPROVED: APPROVED:			Ð	-	CONSTRUCTION TYPE: OVERLASH
APPROVED:)	Call Selection de	W.

- ILL UTILITIES 48 NE NUMBER OF
- FIBER CABLE AT 1LOOP E PROJECT ECT
- TONS SHALL BE LOWEVER, RELESS ON LARGE OR LESS
- ACED AT EVERY S, SPLICE NAGER. TAGS THE GROUND.
 - E PULLING Y PETROLEUM
 - ULTS UNLESS
- IPANIED WITH POLES THE SE OF THE RISER.
- N EACH VAULT. HER IN RISER.
- ON CONTRACTOR LUCTION IS TO RESENTED WITHIN THE RIGHT OF
- INARY AND
- TYPICALLY

TES

SHEET: 2 OF 6

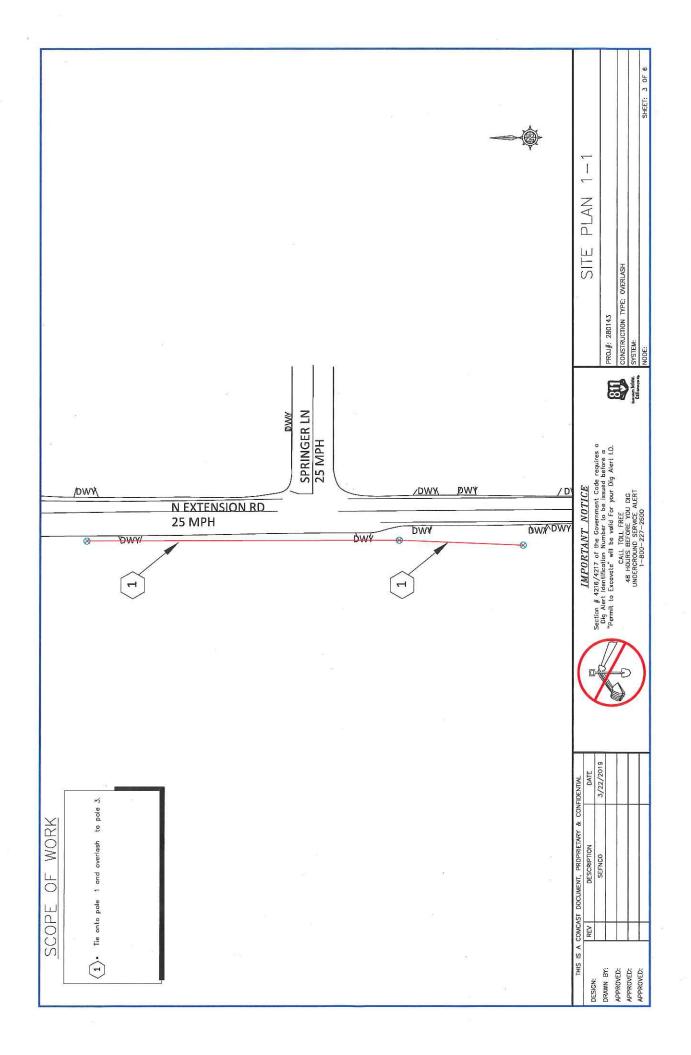

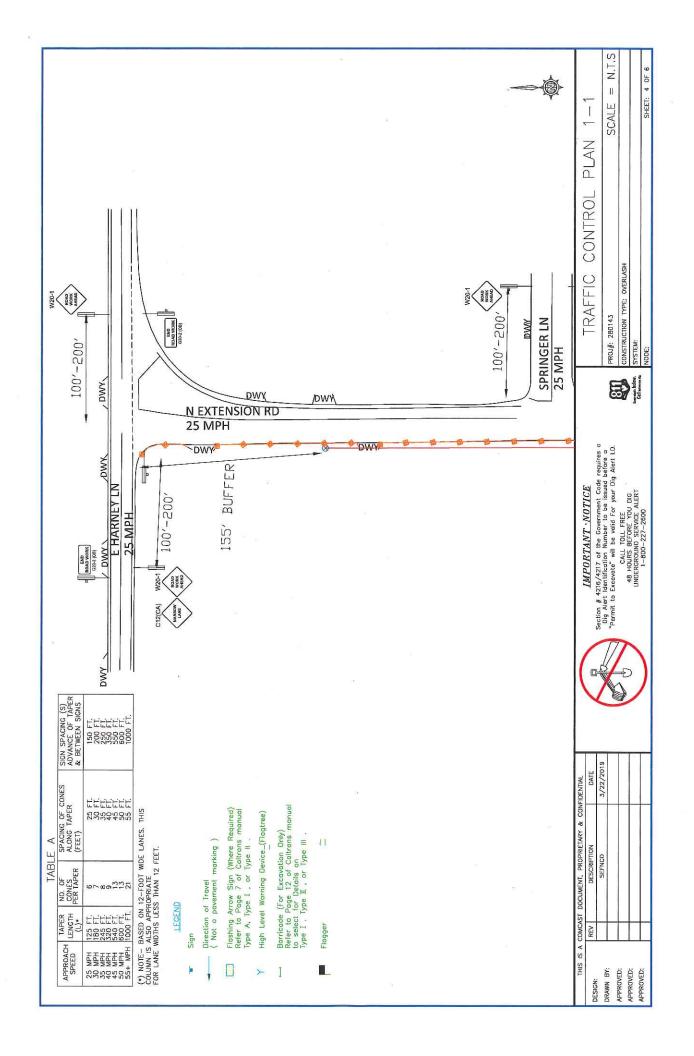


TYPICAL DETAILS


UTILITY CROSSING




POTHOLE REPAIR



BORE @ PAVEMENT




BORE @ CONCRETE



POLE RISER

TRENCH



POWER KERIAL	PROPOSED FIBER USED		-EXISTING GROUND	/.	-EXISTING UTILITY POLE TYPE C STREL-TO-STEEL ALAPTER
	\ \	, rz —			ADICAL POLE RISERS (7) 4"0"
O' NOTCHED STEEL	HIG POLE BRACKET V. PIPE CLAMP CASON BY POVER-STRUF-OR GUALA FEMILE OF ETTER FEMILE OF THE OF THE OF ETTER FEMILE OF THE	TYPE C STEEL-TO-STEEL ADAPTER. CAP (I) 4'0 AT 10.	CD 10" NOTCHED B, CD 10" STEEL CONDUIT SECTIONS		TVPICALP
9 9 9	15" HDG POLE BRY W. PIPE CLAMP BY POVER-STRU EQUAL) 4" FRUM	TYPE C SI AJAPTER, CAP	CD 10° NO	37R, 90° STÉÉL	

PROJ

Section # 4216/4217 of the Covernment Code requires a Dig Alert Identification Number to be issued before a "Permit to Excavote" will be valid For your Dig Alert LD. CALL 10LL FRE 48 HOUNS BEFORE YOU DIG UNDERGROUND SERVICE ALERT 1-800-227-2600

3/22/2019 DATE

DOCUMENT, PROPRIETARY & CONFIDENTIAL

IS A COMCAST REV

DESCRIPTION

SEFNCO

DRAWN BY: APPROVED: APPROVED: APPROVED:

DESIGN:

IMPORTANT NOTICE

DET	
Z	
JCTION	
NSTRU	
SNC	
CO	80143
	1 2

AILS

GENERAL PROVISIONS

GOVERNING INSTALLATION OF SUBSURFACE STRUCTURES AND PIPELINES WITHIN COUNTY ROAD RIGHTS-OF-WAY

PUBLIC CONVENIENCE AND SAFETY:

- A. Before obstructing any private driveway entrance or County road traveled way with a trench, spoil bank, equipment or other barrier permitted for any prolonged period of time, the Permittee shall notify the known users of the respective thoroughfare(s) involved, and shall provide access for vehicular and pedestrian traffic to and from the road.
 - Unless otherwise permitted, all work shall be conducted in such a manner that no less than one lane of the existing County road traveled way will be maintained open to public traffic during working hours in a smooth and safe riding condition(s). Two lanes shall be open after working hours.
 - In cases where road closure is permitted, the permission to close the road will be granted under the condition that the Permittee notify the following persons and/or agencies of the time, the period of closure, and the detour route at least twenty-four (24) hours prior to said road closure.

The County of San Joaquin Public Works Department

d The local fire district

The County of San Joaquin Sheriff's Office

e. The local school district

The local postal service

f. The local residents involved

- Should hazardous conditions relative to the installation operations warrant flagmen, as many capable flagmen as may be necessary shall be provided by the Permittee and stationed in advance of work to warn and direct traffic.
- Lights, signs and barricades shall be furnished, erected and maintained by the Permittee for the adequate warning and convenience of the public, with particular attention to be taken in this regard after dark,
- Any excess dirt and/or debris which might be a hazard to either automobile or pedestrian traffic, uncontrollable by lights, signs and barricades, shall be removed from the jobsite daily.

STRUCTURES:

- A. Walls of structures shall be such quality and strength that they will resist all pressures and will not crack or be deformed in such a way as to create a hazard or maintenance problem at any time. Therefore, the minimum structural requirements for concrete pipe placed under county road rights-of-way shall conform to the following American Association of State Highway and transportation Officials (AASHTO) designations.
 - For concrete pipe up to and including thirty-three inches (33") inside diameter, extra strength concrete conforming to AASHTO Designation M
 - 2. For concrete pipe thirty-six inches (36") inside diameter and larger, reinforced concrete pipe conforming to AASHTO Designation M 170M Class

Plastic pipe conforming to AASHTO Designation M294.

- All concrete pipe joints with County road rights-of-way shall be sealed against leakage and/or infiltration with rubber gasket in conformance with Section 65-1:06 of the California Standard Specifications, or with other methods as may be permitted under the Special Provisions.
- Cast-in-place concrete pipe, vitrified clay pipe, spiral welded steel pipe, or corrugated aluminum alloy pipe shall not be installed within the County road rights-of-way unless specifically so stated in the Special Provisions, and only under the conditions as provided.
- All structures to be buried within the County rights-of-way shall be set at such elevations as to allow minimum coverage of thirty inches (30") to the centerline of the roadways and twelve inches (12") at the bottoms of borrow ditches each side of the roadways. The depths of structures shall be established below a flat plane extending across the rights-of-way, no part of which shall extend above the elevations stated above; manholes, lampholes, valves, etc. not included. Future surface elevations shall be anticipated as nearly as possible and structure elevations shall be established for future adjustments accordingly.
- The County hereby reserves the right to specify in the Special Provisions the gage and surface treatment of any galvanized corrugated metal pipe that is to be
- All longitudinal utility facilities are to be established (and dimensioned on sketches) from surveyed centerline of road right-of-way, not from right-of-way (border) lines.

REPAIRS OF THE COUNTY RIGHT-OF-WAY:

- All excavations shall be backfilled and compacted immediately after work therein has been completed.
- Trenched shall not be left open farther than 300 feet in advance of pipe laying operations, or 200 feet to the rear thereof, unless otherwise permitted by the
- Unless otherwise permitted under the Special Provisions, backfill shall be placed and mechanically compacted in such a manner that the relative compaction throughout the entire fill within the County road right-of-way shall conform to the percentages of compaction as shown on the Trench detail.
- Backfill material shall be placed in horizontal uniform layers not to exceed in thickness, before compaction, 0.67 foot in the bedding region, one -foot where 90% compaction is required, and two-feet where 80% compaction is required.
- No portion of the excavation(s) shall be compacted by ponding or jetting unless a maintenance bond is provided.
- Gravel backfill material shall be utilized only where specifically so stated on the face of the permit. It shall be compacted by means of a high-frequency internal vibrator, the compactor to be a size and type approved by the Engineer. Points of compaction shall not be greater than 18" centers and to the full
- All pavements, curbs, gutters, sidewalks, borrow ditches, pipes, head walls, road signs, trees, shrubbery, and/or other permanent road facilities impaired by or as a result of construction operations at the construction site(s) occupied by materials and/or equipment, shall be restored immediately upon backfilling of the excavation to the original grades and cross sections, and to a condition as good as, or better than existing prior to construction.
- All surfacing materials of roadways and driveway approaches cut or damaged by or as a result of construction operations, shall be replaced within ONE WEEK following the backfilling of excavation, weather permitting, with compacted layers of surfacing materials at least as thick as the existing, and no less than two inches (2") of asphalt concrete over six inches (6") of aggregate base, both as specified below.
 - Asphalt Concrete: Combined mineral aggregate shall conform to the quality and gradation requirements for Type "B" one-half inch(1/2) maximum aggregate, coarse or medium gradation as specified in Section 39 of the California Standard Specifications. The bituminous binder to be mixed with mineral aggregate shall be paving asphalt having (Grade PG 64-10), unless otherwise directed by the Engineer. Placement of asphalt concrete surfacing shall conform to the applicable provisions of Section 39 of the California Standard Specifications.
 - Aggregate Base: Combined mineral aggregates shall conform to the quality and the grading for three-quarter inch (3/4") maximum size aggregate Class 2 Aggregate Base specified in Section 26 of the California Standard Specifications.
- Before acceptance of repairs to the County road rights-of-way, all unsightly and detrimental dirt, dust and/or debris shall be removed and the construction areas left in a neat and presentable condition(s).
 - If necessary, County road traveled way and driveway pavements shall be washed with water to remove dirt and dust.
 - Driveway approaches and field entrance pavements damaged by equipment or spoil banks shall be repaired as directed by the Engineer.
- Upon request by the County, any settlement, sagging of surface, or cracking of pavement shall be repaired immediately by and at the sole expense of the Permittee for a period of one year following acceptance of the work.

SPECIAL PROVISIONS

Winter Weather Utility Work

- 1. <u>SUPERVISION:</u> The utility company (permittee) shall furnish full-time supervision of all work to insure compliance with the permit provision.
- 2. <u>START OF WORK:</u> No work within the County right-of-way shall be started until the utility company representative has made an evaluation of weather conditions and has determined the work can be accomplished under the provisions of the permit.
- 3. <u>CLEAN PAVEMENT:</u> Dirt and mud shall not be deposited on the pavement outside the area of work, and if inadvertently tracked onto the road travel way shall be removed immediately.
- 4. **DAILY RESTORATION:** Private driveways and road intersections shall be restored daily.
- 5. <u>WEATHER-TIGHT CONDITIONS:</u> All trenches shall be filled and compacted, ditches and other drainage facilities regarded and opened, and the entire work area restored to weather-tight condition prior to any rain.