

COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS

P.O. BOX 1810-1810 E. HAZELTON AVENUE STOCKTON, CALIFORNIA 95201 (209) 468-3000 FAX # (209) 468-9324

Permit No: PS-1900731 Date Issued: 03/15/2019 Start Date: 03/18/2019 Exp. Date: 10/01/2019 Project No: PWP730052

Quad: NE

UE/CR/PM NO:35042190

ENCROACHMENT PERMIT

To: PACIFIC GAS & ELECTRIC - STOCKTON PO BOX 930 STOCKTON, CA 95201

Encroachment Type:		The second secon
Traffic Control Devices		

Location:

E/S OF BEECHER RD. 1780' S/O FAIRCHILD RD.

In compliance with your request of <u>03/15/2019</u>, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special	Comments:
---------	-----------

Traffic Control Per MUTCD*****Permitted for traffic control devices only*****Excavation work located outside of County right-of-way****

SS/WW FORMS:

Est. Permit Fee: \$490.00

KRIS BALAJI, Director Department of Public Works

-Permittee WHITE -PWD Central File GOLDENROD YELLOW -Field Inspection PINK -Permit Section

Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1.

- 1. This permit is issued under and subject to all laws and ordinances of agencies-governing the encroachment herein permitted. See the following references:
 - STREETS AND HIGHWAYS CODE
 - 1. Division 1, Chapter 3
 - 2. Division 2, Chapter 2, Section 942
 - 3. Division 2, Chapter 4, Section 1126
 - 4. Division 2, Chapter 5.5 and Chapter 6

SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675...

- 2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.
- 3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.
- 4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.
- 5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.
- 6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.
- 7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.
- 8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.
- 9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indexinity, and hold each of them harmless for such claim.
- 10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Peimittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.
- 11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.
- 12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.
- 13. The Permittee is responsible for the preservation of survey monuments located within the area of work herein permitted. Prior to the start of construction, survey monuments that potentially may be disturbed shall be located and referenced by a Licensed Land Surveyor, and a Corner Record filed with the County Surveyor. Any Survey Monuments disturbed during the course of construction shall be reestablished by a Licensed Land Surveyor and another Corner Record filed with the County Surveyor. (Land Surveyors' Act Section 8771)
- 14. Prior to any excavation, the Permittee shall notify USA North (Underground Service Alert of Northern California and Nevada) at 811 or 800-227-2600 forty-eight (48) hours in advance.

APPLICATION FOR ENCROACHMENT PERMIT

<u>PLEASE</u>	PRINT:	•			
Date	2/12/2019	,	OFFICE U	JSE ONLY	
То:	San Joaquin County Department of Public Works	JOB# APN	730052-0	REF# CR#	
	PG&E PM 3504219	00 EXP. DATE	3/18/19 TO	10/1/19	DRIVEWAYS:
	(Applicant Name)	STREET	BESCHER PD		_ * _ *
•	4040 West Lane	AREA TYPE	STOCKTON QUAD		* *
	(Mailing Address)	FORMS NOTES	SS/WW		Johnson
	Stockton, CA 95204	NOTES			
	(City, State, Zip Code)		CAVATION DUTE	•	
	(209) 470 - 2300		emit for traff only.	NC DOWNE	C DEVICES
	(Area Code - Telephone Number)			· · · · · · · · ·	
	s6pz@pge.com (Email Address)		- Anna-		
The un	dersigned hereby applies for permission to exc	"rain clearance' rember through	for any work durin	ng winter mo	onths
Repla		er Rd approximately the following work (d	escription of work):	ilia Ru,	
Work wil	I commence on or after3/01/20	019	for approximately	180	days.
I, the und work des	dersigned, certify that I am the owner of the res scribed above in accordance with the rules and	pective property, or regulations of San J	am qualified to represer oaquin County and sub	nt the owner and ject to inspectio	d agree to do the n and approval.
	Sanform Paul Face	litarar	2/12/2019		
	Signature of Applicant - Title		Da	te	

Y:\FORMS & TEMPLATES\ENGROACHMENT PERMIT APPLICATION.doc (08/08)





Department of Public Works

Kris Balaji, Director of Public Works


Fritz Buchman, Deputy Director/Development Michael Selling, Deputy Director/Engineering Jim Stone, Deputy Director/Operations Kristi Rhea, Manager of Strategic Initiatives

Acknowledgement of Monument Preservation

I, <u>Brett Brusatori</u> , a duly Licensed Land Surveyor or a Professional Engineer (Please print)								
authorized to perform Land Surveying in the State of California, Registration No. 8775								
hereby acknowledge and accept all responsibility for the monument preservation as required								
per Section 8771(a-f) of the Business and Professions Code within the bounds of the								
construction activity permitted by San Joaquin County Permit No. 8-19-10-131 PM# 35042/90								
I further acknowledge that I am hereby responsible for the Acknowledgement of Monument								
Preservation prior to final acceptance of the construction activity.								
Signature Seal								

PS-MONUMENT PRESERVATION

BRETT G. BRUSATOR No. 8775

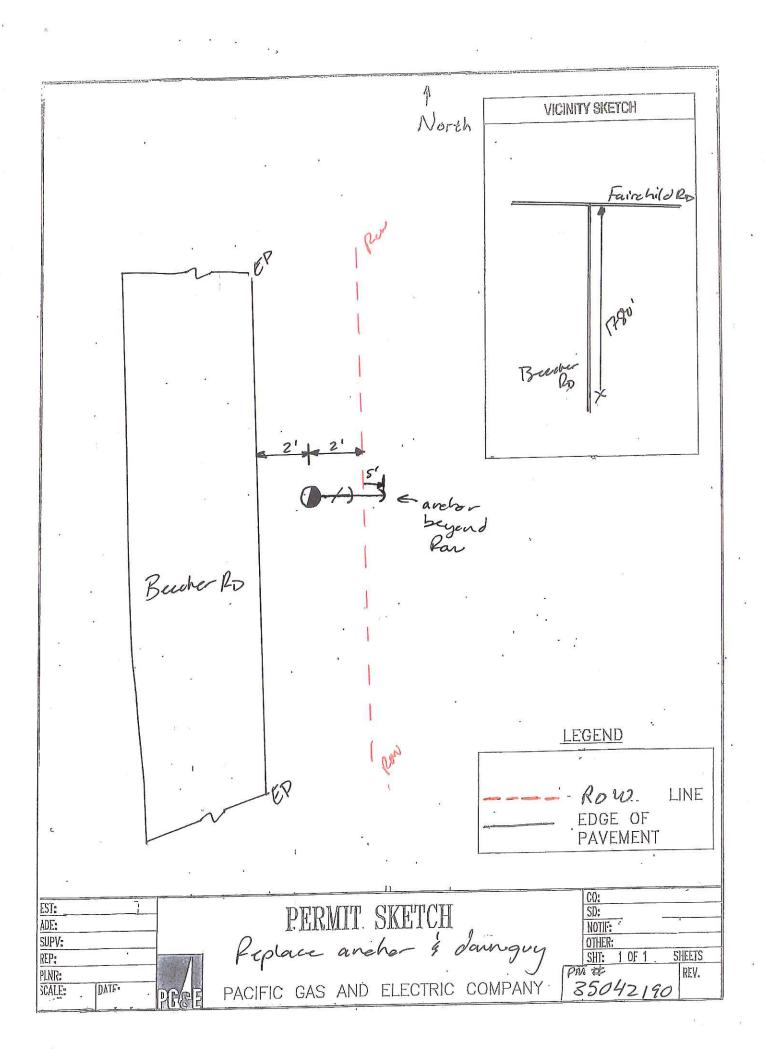

<u>u</u>	
	9
ũ	į
Ċ	1
2	
C	
2	
	1
	8
43	Š
4000	1
Ç	
Ç	ļ
Č	Ì
Ž L L	
4	ĺ
2	
	ĺ
	9
	•
-	-

1 1 v

								<u> </u>									
MAXIMUM CHANNELIZER CONFLICT SPACING (6)	#	2	15	Ame.	20	22	25	25	25	25		,	The state of the s				
MAXINUM CHANNELIZER TANGENT SPACING (3)		8	08	0	8	96	50	100	001	100			The state of the s				
MAXIMUM CHANNELIZER TAPER SPAGING (3)	#	25	30	35	40	45	50	50	20	20	in requirements		head-on conflict.	d rural areas.	co)s		
Dimension "E" BUFFER SPACE (4-A) and FLAGGER STATION STOPPING SIGHT OISTANCE (4-B) (0%) (-3%) (-6%)	Ħ	(155) (160) (165)	(200) (202) (215)	(250) (260) (275)	(305) (315) (335)	(360) (380) (400)	(425) (450) (475)	(495) (520) (555)	(570) (600) (640)	(645) (685) (730)	landard Plans and Standard Specification requirements.		Channelizer spacing shall be reduced by half at areas where work is taking place on curves or areas of head-on conflict.	Buffer space may be inserted in low-speed urban areas and should be inserted in high-speed urban and rural areas	the Primary Flagger Station and safely stop		
Dimension L/3 MINIMUM SHOULDER TAPER	#	\$	09	35	Ć	180	200	220	240	260	ans Standard Plan	greater).	iere work is taking	and should be inse			
Dimension L/2 Shifting Taper Length	#	65	06	125	160	270	300	330	360	390	Work on Freeways and Expressways shall meet the Caltrans Si	Posted Speed or observed operating speed (whichever is greater)	by half at areas wir	peed urban areas a	The Stopping Sight Distance should enable Road Users to see	500 ft.	
Dimension L MERGING TAPER LENGTH	#	125	180	245	320	540	900	660	720	780	and Expressways	bserved operating	ig small be reduced	oe inserted in low-s	1 Distance should e	Sign spacing in rural areas should be 500 ft.	
Dimension A/B/C ADVANCE WARNING SIGN SPACING (5)	Ţ	100	250	250	250	350	350	200	200	500	Work on Freeways	Posted Speed or o	Channelizer spacir	Buffer space may (The Stopping Sigh	Sign spacing in rur	** Table 6F-101(CA)
MPH (2)	Z Z	25	30	35	40	45	20	55	09	65	(a)	(2)	(9)	(4-A)	(4-9)	(5)	(8)

Figure 6H-6. Shoulder Work with Minor Encroachment (TA-6)

