EP.DB.1651-A

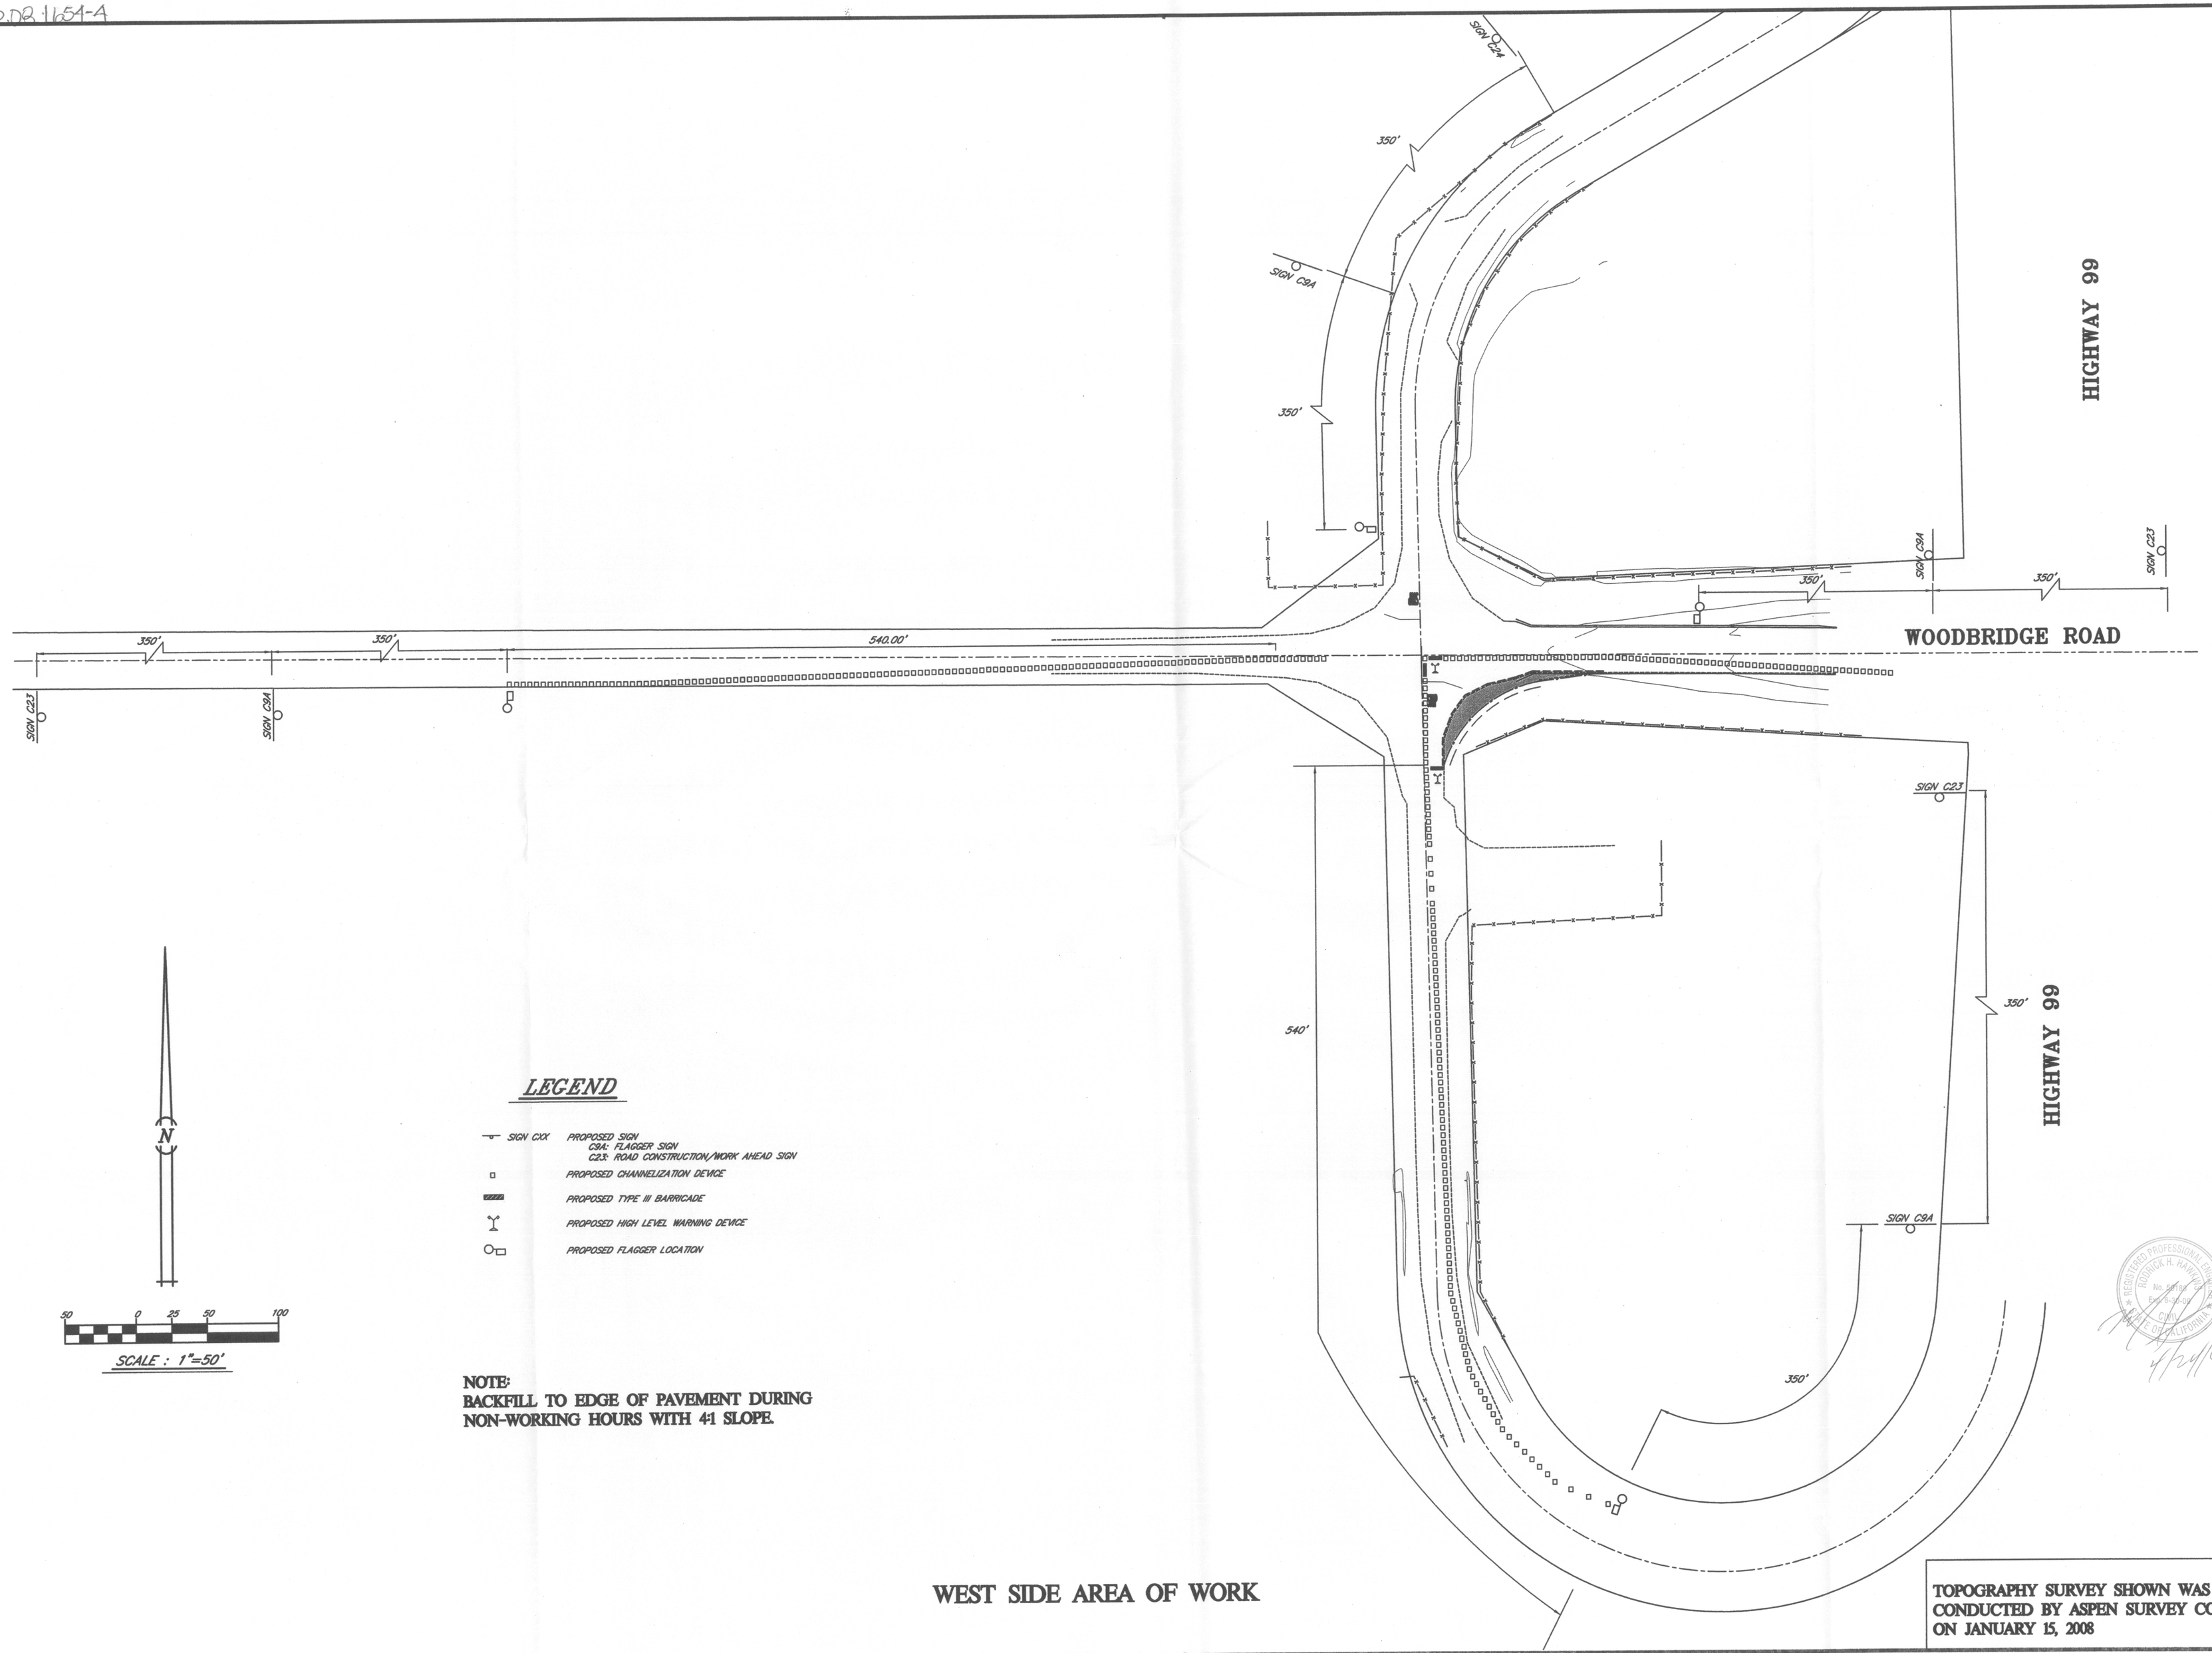

N

50 0 25 50 100

SCALE : 1"=50'

LEGEND

- SIGN CXX — PROPOSED SIGN
  C9A: FLAGGER SIGN
  C23: ROAD CONSTRUCTION/WORK AHEAD SIGN
- PROPOSED CHANNELIZATION DEVICE
- PROPOSED TYPE III BARRICADE
- PROPOSED HIGH LEVEL WARNING DEVICE
- PROPOSED FLAGGER LOCATION

NOTE:
BACKFILL TO EDGE OF PAVEMENT DURING NON-WORKING HOURS WITH 4:1 SLOPE.

WEST SIDE AREA OF WORK

TOPOGRAPHY SURVEY SHOWN WAS CONDUCTED BY ASPEN SURVEY COMPANY ON JANUARY 15, 2008

RODRICK H. HAWKINS R.C.E. 50188
CROLIE E. LINDSAY R.C.E. 31900, L.S. 4709

SYM.	DATE	DESCRIPTION OF REVISION	APP'D.

BY: TJC
CHK: RHH
DATE: 2-2008
SCALE: 1"=50'
JOB #: 2795
FILE: BASE_2795

TRAFFIC CONTROL PLAN
WOODBRIDGE ROAD AT HIGHWAY 99 INTERSECTION

R.M.E. INCORPORATED
SAN JOAQUIN COUNTY, CALIFORNIA

HAWKINS & ASSOCIATES ENGINEERING, INC.
436 MITCHELL RD.
MODESTO, CA. 95354
PH: (209) 575 - 4295
FX: (209) 578 - 4295

REGISTERED PROFESSIONAL ENGINEER
RODRICK H. HAWKINS
No. 50188
CIVIL
STATE OF CALIFORNIA

SHEET 4. OF 5.
2795

T:\2795 - Woodbridge On-Ramp\Improvement Plans\2795_Base.DWG PLOTTED 4-24-08 08:40:57 AM