COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: **PS-1301800**
Date Issued: 07/08/2013
Exp. Date: 01/15/2014
Project No: PWP730052
Quad: NE

UE/CR/PM NO:31006393

ENCROACHMENT PERMIT

To: PACIFIC GAS & ELECTRIC - STOCKTON
PO BOX 930
STOCKTON, CA 95201

Encroachment Type:

Bell Hole (In Dirt Shoulder)			

Location:
E/S OF PINASCO RD. 1170' N/O HWY 26

In compliance with your request of **07/08/2013**, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

Permittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:

Traffic Control Per MUTCD

FORMS:

SS/WW, R-29		

Est. Permit Fee: $413.00

THOMAS M. GAU, Director
Department of Public Works

By: _____
Permit Section

WHITE	-Permitee
GOLDENROD	-PWD Central File
YELLOW	-Field Inspection
PINK	-Permit Section

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 7/3/13

To: San Joaquin County
Department of Public Works

Pacific Gas and Electric Co.
P.O. Box 930
Stockton, CA 95201

(209) 942-1599
(Area Code - Telephone Number)

OFFICE USE ONLY

JOB #	930052-6	REF #	
APN		CR #	
EXP. DATE	1/15/14		
VALID	7/15/13 TO 1/15/14		DRIVEWAYS:
STREET	PINASCO RD		*
AREA	STOCKTON QUAD	NE	*
TYPE	BELL HOLE		*
FORMS	SS/WW, R-29,		
NOTES			

Sketch (Detailed plans may be submitted)

See attached sketch.
PM 31006393
Notif. 106998203

Traffic Control Plan
Shall be as per
current M.U.T.C.D.
California supplement.

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the E side of PINASCO Rd approximately 1170' (feet)/mile N of Hwy 26, Stockton, by performing the following work (description of work): Excavate (1) 4x4' Bell Hole (IN DIRT) to cut-off Existing Gas Service

Work will commence on or about 7/15/13 for approximately 150 days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

Signature of Applicant - Title

7/3/13
Date

E:\PUB-SV.WK\MASTER.PS\ENCROACHMENT PERMIT APPLICATION.DOC (01/08)

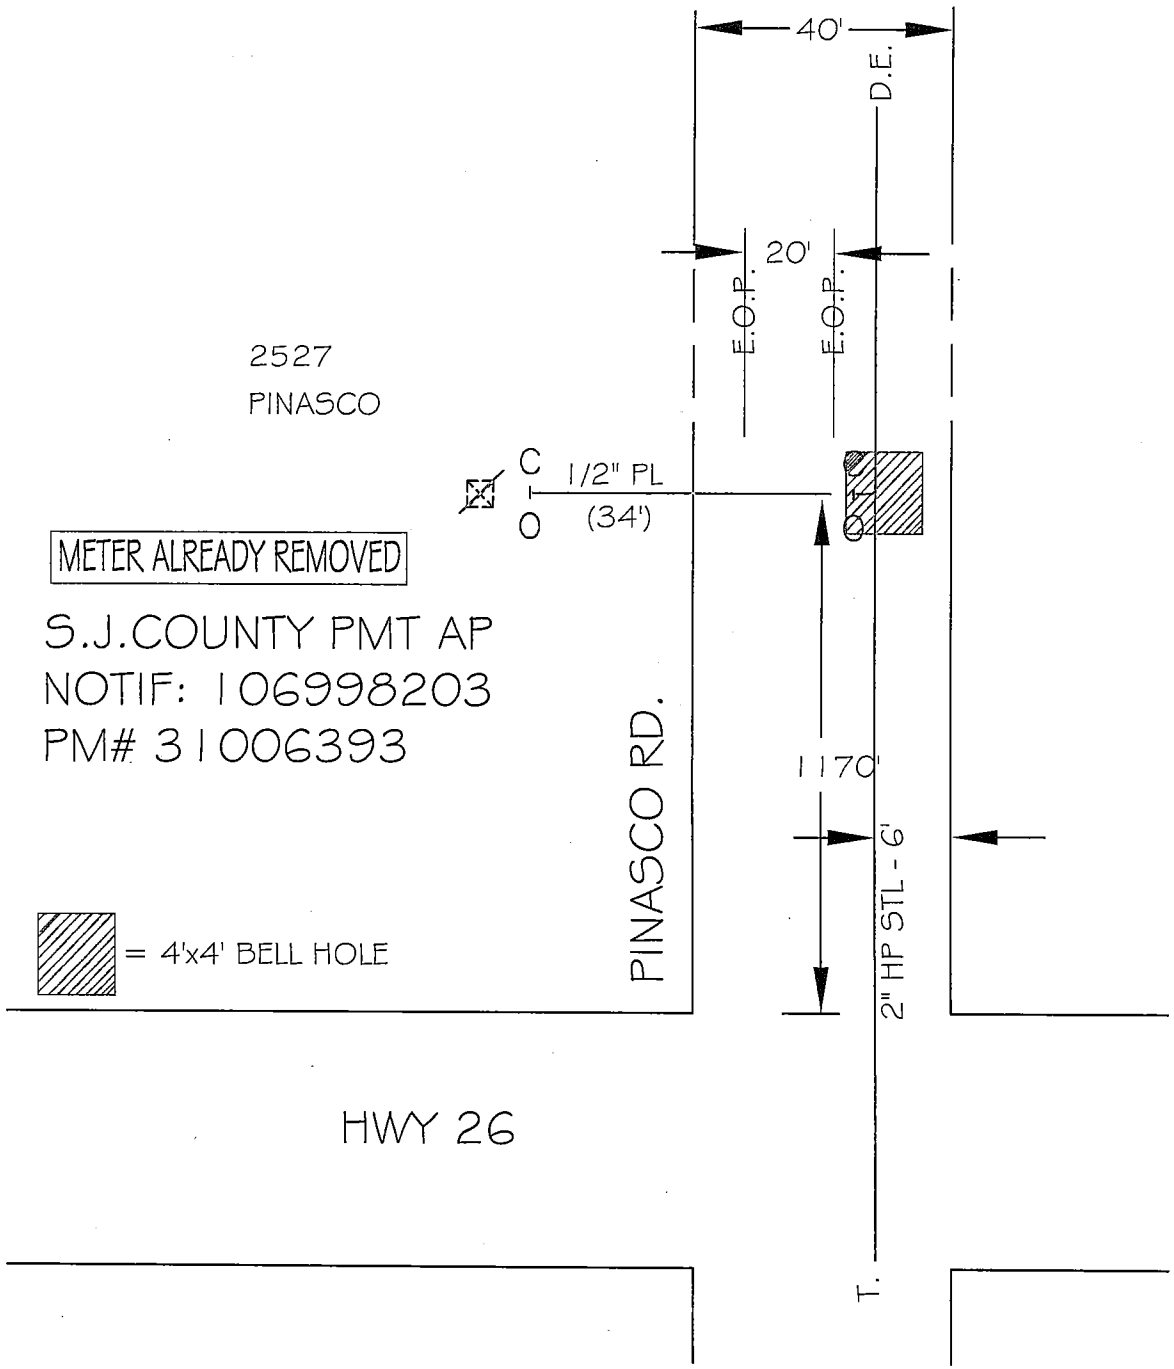
40'
D.E.
20'
E.O.P.
E.O.P.
2527
PINASCO
C
O
1/2" PL
(34')
METER ALREADY REMOVED
S.J.COUNTY PMT AP
NOTIF: 106998203
PM# 31006393
PINASCO RD.
1170'
2" HP STL - 6'
= 4'x4' BELL HOLE
HWY 26
T.

Figure 6H-6. Shoulder Work with Minor Encroachment (TA-6)

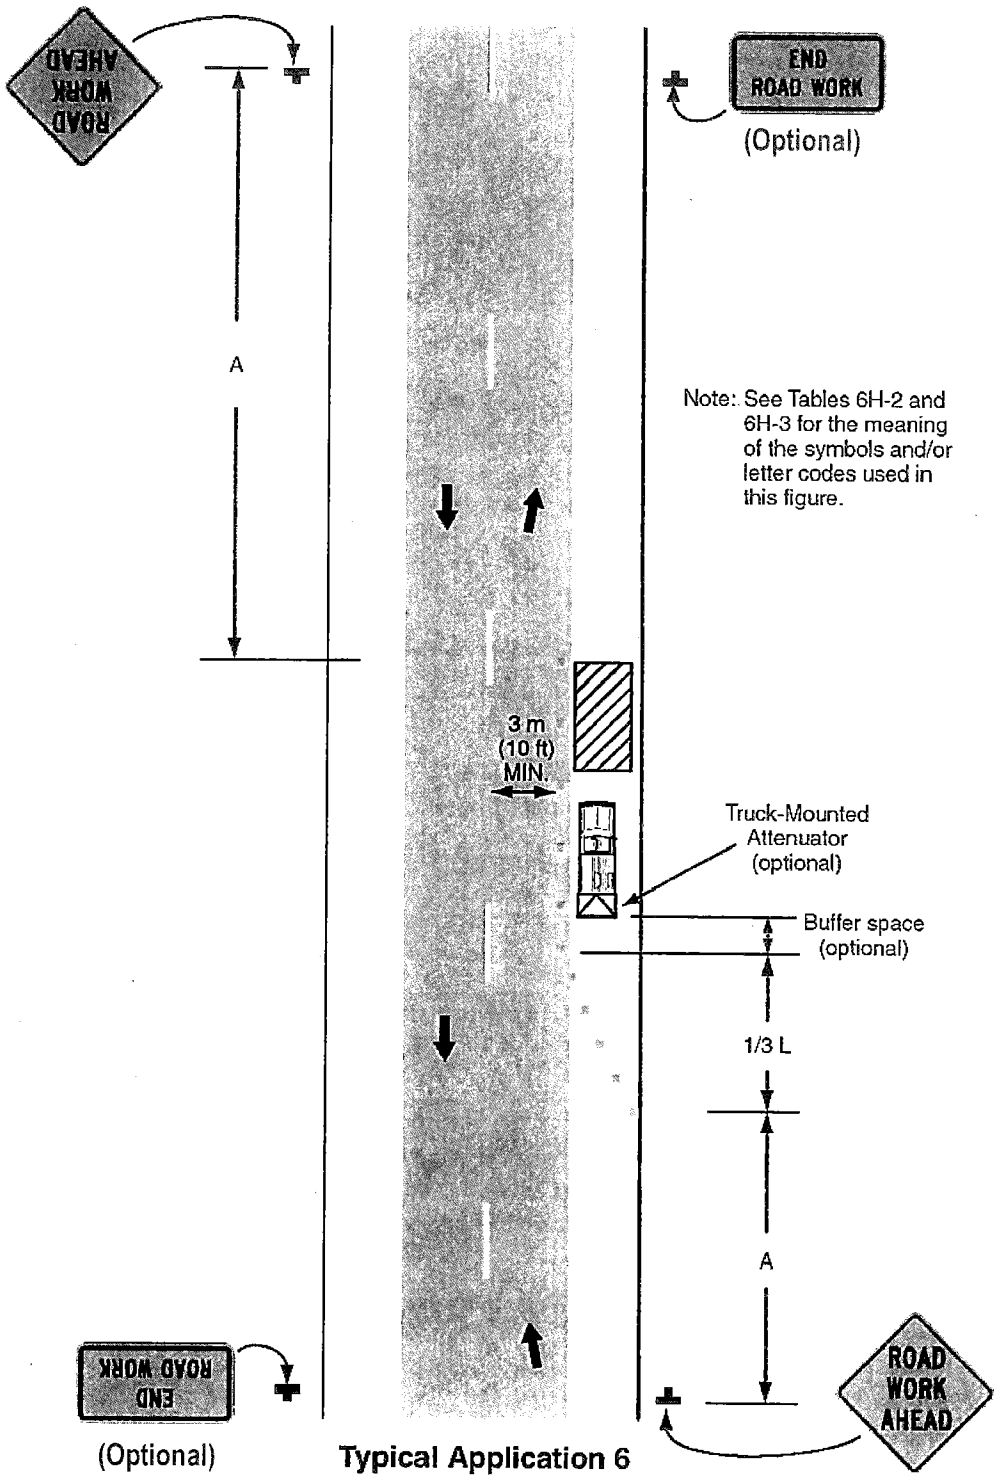

Typical Application 6