COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: **PS-0900343**
Date Issued: 02/17/2009
Exp. Date: 02/17/2010

Project No: PWP110005
APN No: 00317010

DRIVEWAY ENCROACHMENT PERMIT

To: VIERRA, VERNON JOSEPH & JENISE M
151 W TADDEI RD
ACAMPO CA 95220-

DW-0733 NW
IS No longer Valid

Location: W/S OF BENDER RD. 500' N OF TADDEI RD.

In compliance with your request of **02/17/2009**, and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form.
Permission is hereby granted to construct One driveway approach w/pipe shown on
Permit Application No. PS-0900343 Quad: NW

Jobsite shall be kept in a safe condition at all times by removing daily any excess dirt or debris which might be a hazard to pedestrian and/or vehicular traffic. Adequate lights, signs and barricades shall be placed and maintained by the Permittee for the protection of the public in accordance with the current Caltrans Standard Specifications.

A(n) (12 inch) Twelve inch inside diameter per section 62 of the current Caltrans Standard Specifications, ALTERNATIVE PIPE AND PIPE ARCH CULVERTS, shall be installed in roadside drainage ditch for drainage flow maintenance and shall be of sufficient length to clear toe of approach fill or headwalls.

The entire area of driveway approach(es), include flares for turning and /or paved frontage(s), from the edge of roadway pavement to right-of-way (front property) line shall be surfaced with a two inch (2") minimum of asphalt concrete over a (6 inch) Six inch minimum of compacted layer of three-quarter inch (3/4") maximum size aggregate base material (road gravel) conforming to Class 2 Aggregate Base specified in Section 26 of the current Caltrans Standard Specification, or with a four inch (4") minimum of portland cement concrete.

If portland cement concrete pavement is installed, expansion joints shall be provided at the edge of pavement and along property line. Surface grades of approach(es) and/or to open ends of pipe. No ponding or puddles on pavement surface shall be allowed.

The field Engineering Division of this office shall receive no less than forty-eight(48) hours notice prior to beginning of any work within the County right-of-way. After completion of the work permitted herein, all debris, lumber, barricades or any excess material shall be removed and the jobsite left in a neat workmanlike condition. The Permittee shall fill out and mail notice of completion provided by Grantor.

Driveway(s) shall be complete prior to occupancy of the residence, but not to exceed expiration date.

THOMAS R. FLINN, Director
Department of Public Works

By _____
Permit section

FORMS: R-17, SS/WW

DRIVEWAY ENCROACHMENT PERMIT

GENERAL PROVISIONS

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:
   STREETS AND HIGHWAYS CODE
   1. Division 1, Chapter 3
   2. Division 2, Chapter 2, Section 942
   3. Division 2, Chapter 4, Section 1126
   4. Division 2, Chapter 6

   SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 441,648,662,695,700,860, 3359 and 3675.

2. It is understood and agreed by the Permittee that the doing of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.

3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean a condition as is possible and upon completion of the work granted herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.

4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any injury to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility of such maintenance of the encroachment structure by the County of San Joaquin.

5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Director of Public Works or his representative.

6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway may. require, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved by and at the sole expense of the Permittee.

7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.

8. All work shall be planned and carried out so that there will be as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Barricades shall be placed, With approved Signs and lights at light, and flagmen shall be employed, all as may be required by the particular work in progress.

9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to do the work provided for under this permit. In the event any .claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold them and each of them harmless for such claim.

10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely Stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surfacing is cut or damaged in the work of placing an encroachment structure, such material shall either be separately stored and replaced in the roadway as nearly as possible.in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as It was before the commencement of operations of placing the encroachment structure.

11. Whenever necessary to, secure permission from abutting property owners, such authority must be secured by the Permittee prior to starting work..

12. The future safety and convenience of the traveling public shall be given every consideration in the location and type of construction..

13. CONCRETE DRIVEWAYS SHALL BE REPLACED WITH ASPHALT CONCRETE WHEN THE COUNTY RESURFACES ROADWAYS.

COUNTY OF SAN JOAQUIN
DEPARTMENT OF PULIC WORKS

Date: 2/17/2009

Received By: Amy

DRIVEWAYS AND PAVED FRONTAGES PERMIT APPLICATION

CR#: _____

APPLICANT	
Name:	Vern J. Vierra
Address:	151 W. Taddei Rd
City, State, Zip Code:	Acampo Ca 95220
Area Code - Telephone Number:	334-0513

SITE INFORMATION:	
Parcel Owner's Name:	Vern Vierra
Site Address:	22769 N. Bender Rd
City, State, Zip Code:	Acampo Ca. 95220
Area Code - Telephone Number:	334-0513

CONTRACTOR	
Name:	Delta Buildings Inc
Address:	151 W. Taddei Rd
City, State, Zip Code:	Acampo, Ca 95220
Area Code - Telephone Number:	334-0513

OFFICE USE ONLY			
JOB #:	11005	ISSUE DATE:	
APN	003-170-10	FEE DUE:	
EXP. DATE:		DRIVEWAYS:	
STREET:	Bender Rd.		
AREA:	Acampo	QUAD NW	
TYPE:	DW		
FORMS:	SS/WW R-17		
NOTES:			

DRIVEWAY		
TYPE:	QUANTITY	WIDTHS
AGRICULTURE:		@FRONTAGE
COMMERCIAL:	1	
INDUSTRIAL:		@ R/W
RESIDENCE:		

PAVED FRONTAGE				
LENGTH:	Ft.	X	WIDTH:	Ft.

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the W/S side of Bender Rd approximately 500' (feet)/mile 1 N of Taddei Rd, _____, by installing _____

_____

_____

_____

_____ Work will commence on or about _____ for approximately _____ days.

SKETCH (Separate sheet may be submitted)

Will this project be self-installed? _____YES _____NO Contractor's License _____

THE APPLICANT HEREBY CERTIFIES:

1. That he/she has read all the provisions of this application, and that the description included in this application are correct to the best of his/her knowledge; and
2. That he/she is the owner of the respective property, or is qualified to represent the owner; and
3. That he/she will assume full responsibility for all liability for persona; injury or damage to property which may arise out of the work described above, or which may arise out of his/her failure to do the work provided herein; and
4. That in the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, he shall defend, indemnify and hold them and each of them harmless for such claim; and
5. That work shall be performed by the applicant and/or any representative of the application in the County Right-of-Way at the above indicated site with a valid San Joaquin County Encroachment Permit; and
6. That if permission is granted as requested, he agrees to do the work described in accordance with all terms, condition and restriction of this and any attached sheet, included as general or special III provisions.

[signature] ______________ Signature of Applicant Title   2/17/09 ______________ Date

>>>FIELD INSPECTION COMMENTS<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<

EXISTING CONDITIONS

1. DRIVEWAY: None ☐ Dirt ☐ Gravel ☒ Aggregate Base ☐ Paved (poor) ☐ Paved (good) ☐
2. SLOPING: Away from Pavement ☐ Towards Pavement ☒ Flat ☐
3. PIPES: None ☐ Existing – Type 12" Ø ______________
   Other pipes in neighborhood: Yes ☐ No ☒ Approaches ☐ Cross Drain ☐ Size ______
4. HEADWALL: Yes ☐ No ☒
5. ASPHALT CONCRETE DIKE: Yes ☐ No ☒
6. BARRIERS: along Right-of-Way ______________
7. DITCH: Yes ☒ No ☐ If Yes: V Style ☒ 2 Point ☐ Other ☐ Width ______ Depth ______

>>PERMITS REQUIREMENTS<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<

1. DRIVEWAY: SFR ☐ Commercial ☒ Agriculture ☐ Industrial ☐

   Paved with ______ "Min Depth A.C. over ______ "Min Depth ¾" A.B. over

Notes: ______________

____

2. PIPES: Length of Pipe Required ______________ Ft. and Diameter of Pipe ______________ inch(es)

   To be connected to any adjacent driveway pipe Yes ☐ No ☒
   Drainage Inlet Required Yes ☐ No ☒
   Total Length: ______________ (with proposed) Total Number of Storm Drain Inlets: ______________

Notes: ______________

____

3. HEADWALL: Yes ☐ No ☒
4. PAVED FRONTAGE: Paved with ______ "Min Depth A.C. over ______ " Min Depth ¾" A.B.
   Measuring ______ Feet in length and ______ Feet in width

>>FEES<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<<

Driveway Encroachment Permit base fee X $90.00

Field Inspection

☒ Driveway w/ or w/o pipe ______________ $102.00
☐ Driveway w/box Culvert ______________ $167.00
☐ Paved Frontage ______________ $108.00 + 0.50/ft.
☐ Curb, Gutter, Sidewalk ______________ $105.00 + 1.03/ft.

COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810- 1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX# (209) 468-9324

DW EP No:	DW-07 33 NW
Date Issued:	4/3/2007
Expiration Date:	4/2/2008
Job No:	11005
APN No:	003-170-10
CR#	031807

DRIVEWAY ENCROACHMENT PERMIT

To: VERN J. VIEMA
151 W. TADDEI RD.
ACAMPO, CA. 95220

Location: 22757 N. BENDER RD. ACAMPO, CA. 95220; N/S OF TADDEI RD. 500' W/O BENDER RD.

In compliance with your request of 3/29/2007 and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form.

Permission is hereby granted to constuct ONE DRIVEWAY APPROACH WITH PIPE shown on Permit Application No. DW-07 33 NW.

Jobsite shall be kept in a safe condition at all times by removing daily any excess dirt or debris which might be a hazard to pedestrian and/or vehicular traffic. Adequate lights, signs and barricades shall be placed and maintained by the Permittee for the protection of the public in accordance with the current Caltrans Standard Specifications.

A(n) TWELVE nch (12 ") inside diameter per section 62 of the current Caltrans Standard Specifications, ALTERNATIVE PIPE AND PIPE ARCH CULVERTS, shall be installed in roadside drainage ditch for drainage flow maintenance and shall be of sufficient length to clear toe of approach fill or headwalls.

The entire area of driveway approach(es), include flares for turning and/or paved frontage(s), from the edge of roadway pavement to right-of-way (front property) line shall be surfaced with a two inch (2") minimum of asphalt concrete over a FOUR minim 4 mpacted layer of three-quarter inch (3/4") maximum size aggregate base material (road gravel) conforming to Class 2 Aggregate Base specified in Section 26 of the current Caltrans Standard Specification, or with a four inch (4") minimum of portland cement concrete.

If portland cement concrete pavement is installed, expansion joints shall be provided at the edge of pavement and along property line. Surface grades of approach(es) and/or to open ends of pipe. No ponding nor puddles on pavement surface shall be allowed.

The Field Engineering Division of this office shall receive no less than forty-eight (48) hours notice prior to beginning of any work within the County right-of-way. After completion of the work permitted herein, all debris, lumber, barricades or any excess material shall be removed and the jobsite left in a neat workmanlike condition. The Permittee shall fill out and mail notice of completion provided by Grantor.

Driveway(s) shall be complete prior to occupancy of the residence, but not to exceed expiration date.

THOMAS R. FLINN, Director
Department of Public Works

WHITE - Permittee
GOLDENROD - PWD Central File
YELLOW - Field Inspection
PINK - Permit Section

By _____
Permit section

FORMS: R-17, SS/WW

DRIVEWAY ENCROACHMENT PERMIT

GENERAL PROVISIONS

1. This permit is issued under and subject to a11 1aws and ordinances of agencies governing the encroachment herein permitted. See the following references:
   STREETS AND HIGHWAYS CODE
   1. Division 1, Chapter 3
   2. Division 2, Chapter 2, Section 942
   3. Division 2, Chapter 4, Section 1126
   4. Division 2, Chapter 6

   SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 441,648,662,695,700,860, 3359 and 3675.

2. It is understood and agreed by the Permittee that the doing of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.

3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean a condition as is possible and upon completion of the work granted herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.

4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any injury to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility of such maintenance of the encroachment structure by the County of San Joaquin.

5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Director of Public Works or his representative.

6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway may. require, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved by and at the sole expense of the Permittee.

7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.

8. All work shall be planned and carried out so that there will be as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Barricades shall be placed, With approved Signs and lights at light, and flagmen shall be employed, all as may be required by the particular work in progress.

9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to do the work provided for under this permit. In the event any .claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold them and each of them harmless for such claim.

10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely Stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surfacing is cut or damaged in the work of placing an encroachment structure, such material shall either be separately stored and replaced in the roadway as nearly as possible.in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as It was before the commencement of operations of placing the encroachment structure.

11. Whenever necessary to, secure permission from abutting property owners, such authority must be secured by the Permittee prior to starting work..

12. The future safety and convenience of the traveling public shall be given every consideration in the location and type of construction..

13. **CONCRETE DRIVEWAYS SHALL BE REPLACED WITH ASPHALT CONCRETE WHEN THE COUNTY RESURFACES ROADWAYS.**

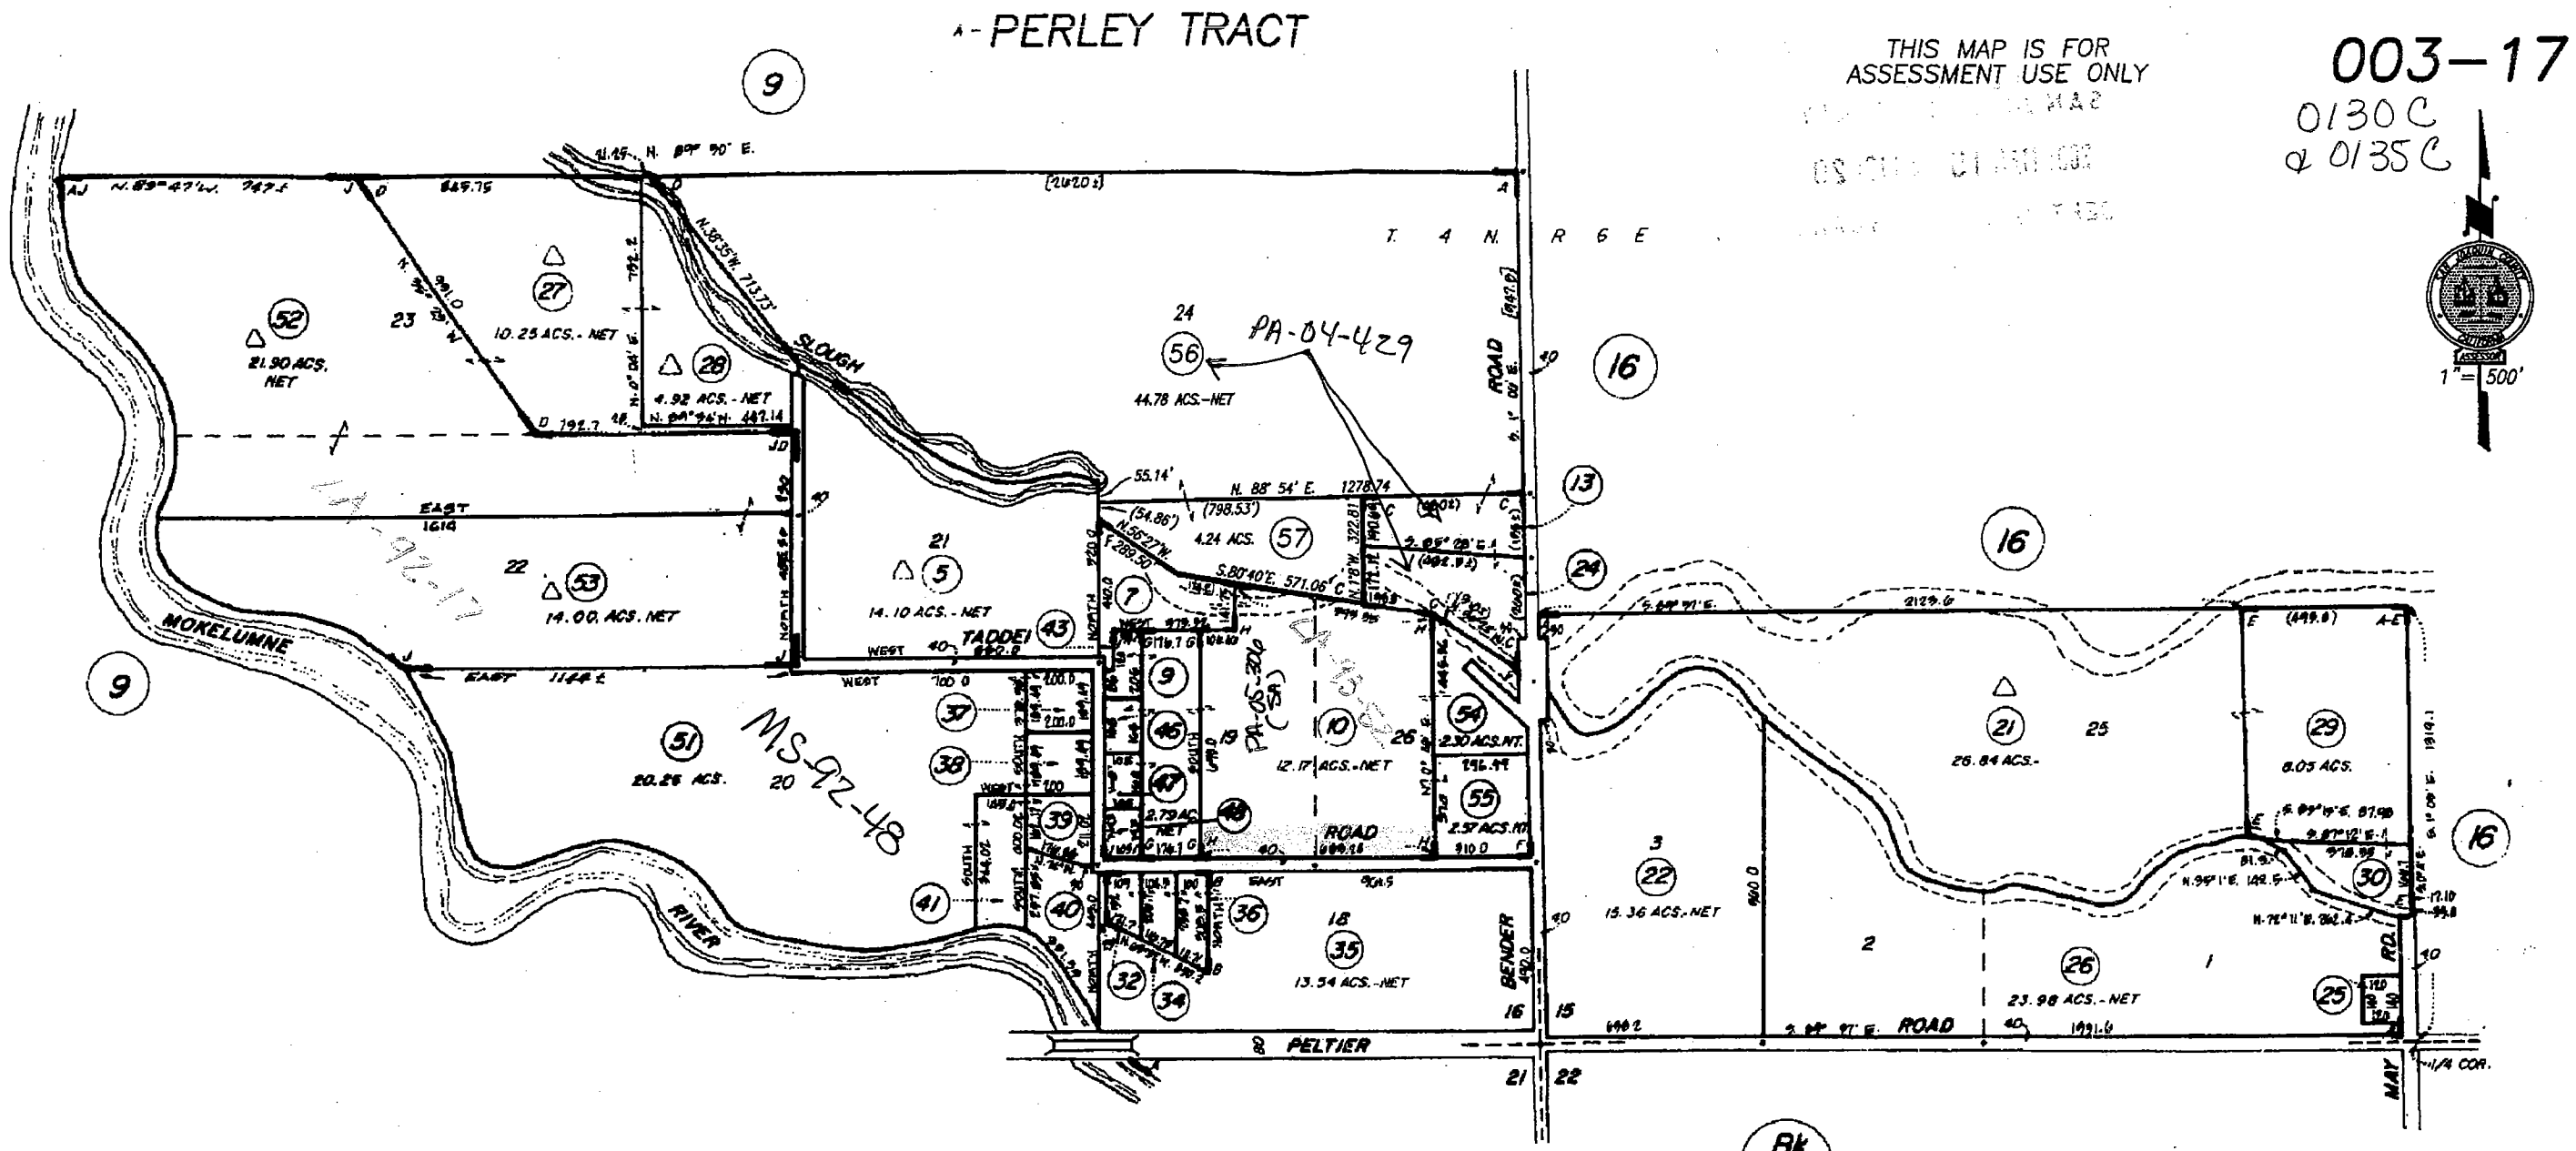

HIGHEST A.P.N. USED			
YEAR	PAR. #	PAR. #	PAR. #
85-86	42		
89-90	44		
90-91	46		
91-92	48		
93-94	50		
95-96	51		
96-97	53		
99-00	55		
05-06	57		

A – R. M. Bk. 04 Pg. 011
B – R. S. Bk. 15 Pg. 038 C3146
C – R. S. Bk. 15 Pg. 033 C3139
D – P. M. Bk. 03 Pg. 143
E – P. M. Bk. 08 Pg. 138
F – R. S. Bk. 13 Pg. 269
G – R. S. Bk. 14 Pg. 093 C2991
R. S. Bk. 15 Pg. 132 C3233
H – P. M. Bk. 06 Pg. 103
I – R. S. Bk. 29 Pg. 152
J – R. S. Bk. 32 Pg. 044

△ – Williamson Act Parcels

NOTE: Assessor's Parcel Numbers Shown in Circles.
Assessor's Block Numbers Shown in Ellipses.
RIVER & SLOUGH AERIAL PHOTO REVISED AS OF 2-85

Assessor's Map Bk.003 Pg.17
County of San Joaquin, Calif.