COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS

P.0. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: **PS-1301505**
Date Issued: 06/05/2013
Exp. Date: 12/01/2013
Project No: PWP110005
Quad: NS

UE/CR/PM NO:41708829

ENCROACHMENT PERMIT

To: PACIFIC GAS & ELECTRIC - STOCKTON
PO BOX 930
STOCKTON, CA 95201

Encroachment Type:

Bell Hole			

Location:
S/S OF TOTTEN AVE. 118' E/O SUNSET AVE.

In compliance with your request of **06/05/2013**, permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

mittee shall call the Department of Public Works, Field Engineering Division (Permit Inspections) at (209)953-7421 at least rorty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion (see attached post card) provided by Grantor.

Special Comments:
Traffic Control Per MUTCD****Emergency Work of Gas Line Repair****

FORMS:	SS/WW, R-29	Trench Cutting	Policy

Est. Permit Fee: $413.00

THOMAS M. GAU, Director
Department of Public Works

By: _____
Permit Section

WHITE	-Permitee
GOLDENROD	-PWD Central File
YELLOW	-Field Inspection
PINK	-Permit Section

ENCROACHMENT PERMIT GENERAL PROVISIONS

13-1

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:
   STREETS AND HIGHWAYS CODE
   1. Division 1, Chapter 3
   2. Division 2, Chapter 2, Section 942
   3. Division 2, Chapter 4, Section 1126
   4. Division 2, Chapter 5.5 and Chapter 6

   SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, 892, 3359, and 3675.

2. It is understood and agreed by the Permittee that the performance of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.

3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean condition as is possible and upon completion of the work authorized herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.

4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any damage to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility for such maintenance by the County of San Joaquin.

5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Department of Public Works.

6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway is necessary, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved or removed by and at the sole expense of the Permittee.

7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.

8. All work shall be planned and carried out with as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Traffic control standards shall be utilized including barricades; approved signs and lights; and flagmen, as required by the particular work in progress.

9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to properly perform the work provided under this permit. In the event any claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold each of them harmless for such claim.

10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surface is removed or damaged in the course of work related to the permitted encroachment, such material shall either be separately stored and replaced in the roadway as nearly as possible in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as it was before the commencement of operations of placing the encroachment structure.

11. Whenever it becomes necessary to secure permission from abutting property owners for the proposed work, such authority must be secured by the Permittee prior to starting work.

12. The current and future safety and convenience of the traveling public shall be given every consideration in the location and methods of construction utilized.

13. The Permittee is responsible for the preservation of survey monuments within the work herein permitted. If any are disturbed, the Permittee is required to tie out each location and re-establish them after completion of work, using a licensed land surveyor. A corner record must be filed in accordance with state law for any re-set monuments.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 5/29/13

To: San Joaquin County
Department of Public Works

Pacific Gas & Electric
P.O. BOX 930
STOCKTON, CA 95201
209-942-1627

OFFICE USE ONLY

JOB #	730052-6	REF #	
APN		CR #	
EXP. DATE	12/1/13		
VALID	5/28/13 TO 12/1/13		DRIVEWAYS:
STREET	TOTTEN AVE.		*
AREA	STOCKTON QUAD N5		*
TYPE	BELL HOLE		*
FORMS	SS/WW, R-29, Trench Cutting Policy		
NOTES			

EMERGENCY WORK

Sketch (Detailed plans may be submitted)

See attached sketch.

PM 41708829
Notif.

Traffic Control Plan
shall be as per
current M.U.T.C.D.
California supplement

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the South/~~East~~ side of Totten approximately 118' feet/~~mile~~ N/E of Sunset Ave, Stockton, by performing the following work (description of work): Emergency work to repair gas line. Work completed 5/28/13. Permanent paving to follow.

Work will commence on or about 5/28/13 for approximately 180 days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

Jan Boucher · Sr. Gas Estimator — 5/29/13

Signature of Applicant - Title — **Date**

E:\PUB-SW\WK\MASTER.PS\ENCROACHMENT PERMIT APPLICATION.DOC (01/08)

Return Permits to:
CCD
P.O. Box 930
Stockton, CA 95201-0930

Pacific Gas and Electric Company
DIVISION CONSTRUCTION
Stockton Division

DATE REQUESTED:	5-28-13	STREET ADDRESS:	2217 Totten Ave
PM	41708829	CROSS STREET:	Sunset
REASON FOR THE CUT:	Gas Repair	CITY:	Stockton
PG&E FOREMAN:	Brandon Jones	COUNTY:	San Joaquin.
FOREMAN PHONE:	209-401-1854	PERMIT NUMBER:	

CONCRETE DEPTH: (CIRCLE ONE)	4"	5"	6"	ADD'TL

ASPHALT DEPTH: (CIRCLE ONE)	4"	5"	6"	ADD'TL

FEET	INCHES	BY	FEET	INCHES
		BY		
		BY		
		BY		
		BY		

FEET	INCHES	BY	FEET	INCHES
3	7	BY	3	6
		BY		
		BY		
		BY		

SAW CUT	15	LINEAL FEET	AC BERM		LINEAL FEET	CURB & GUTTER		LINEAL FEET

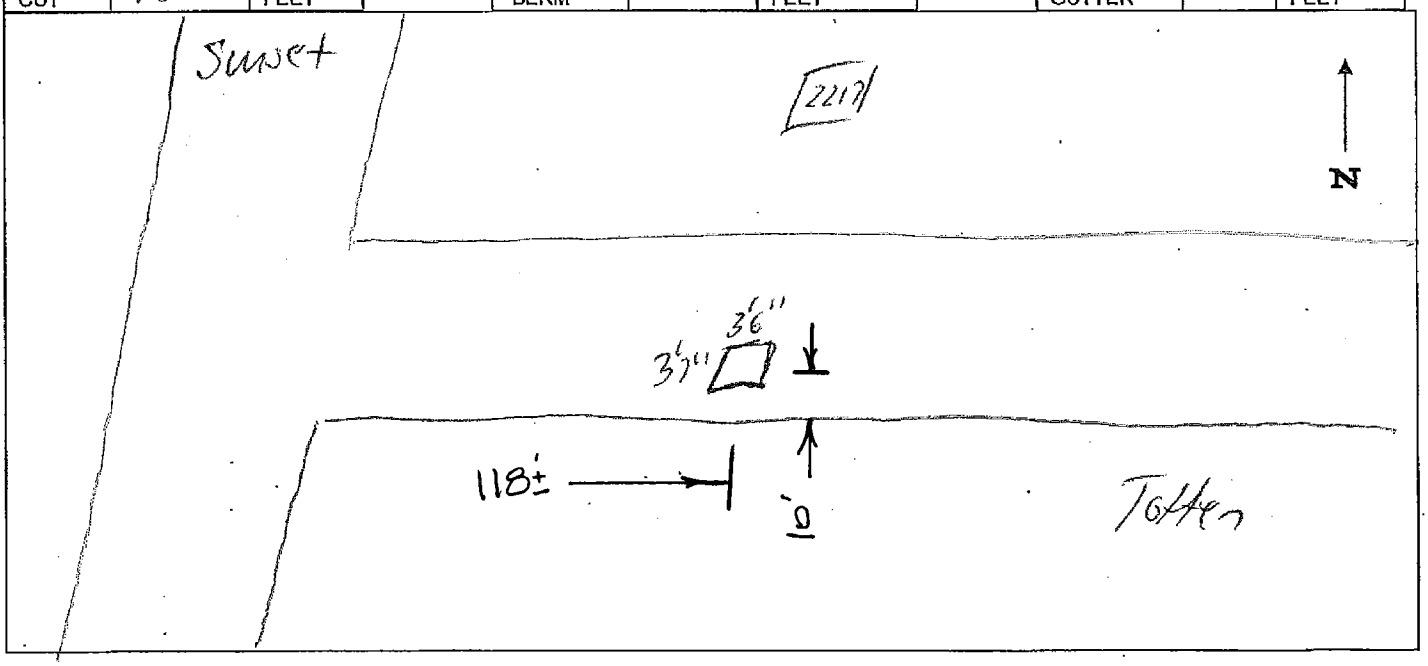

CONTRACTOR'S USE ONLY

DESCRIPTION	UNIT COST	SQUARE FEET	TOTAL

COMPLETION DATE _____

UTA-4 Lane Closure on Street, Self-regulating

1. The traffic control procedure shown is appropriate only for low-volume, low-speed streets / roads.
2. Traffic can regulate itself when volumes are low and the length of the work space is short, if drivers can readily see the roadway beyond.
3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. The one-lane, two-way taper is used in advance of an activity area that occupies part of a two-way roadway in such a manner that a portion of the roadway is used alternately by traffic on both directions. Typically, a flagger controls traffic. A short taper of 100 feet maximum with channelizing devices (cones, etc.) at approximately 16 foot spacing should be used to guide traffic into the one-way section.

TOTTEN

SUNSET

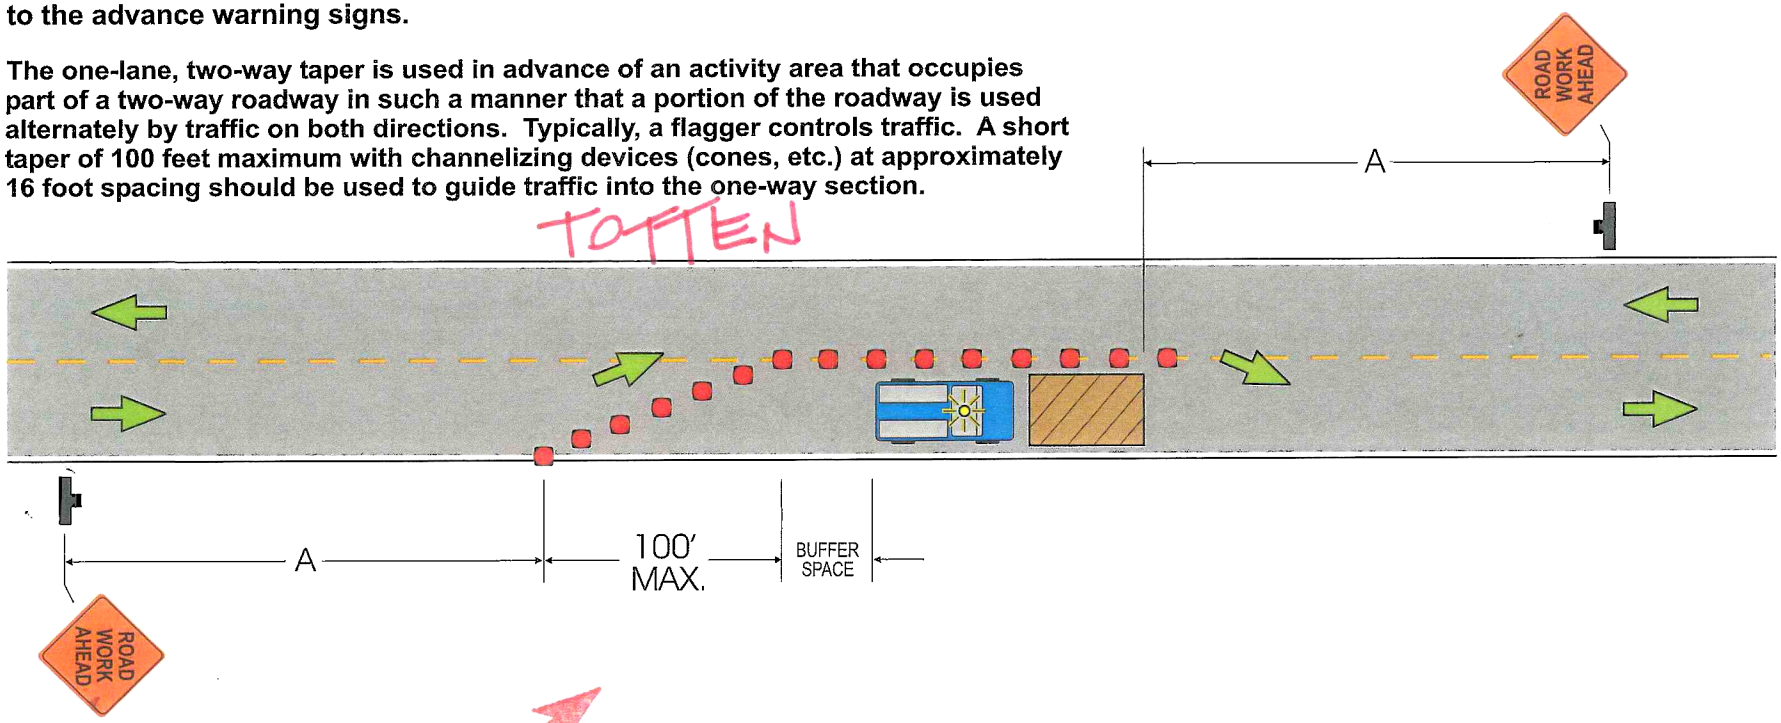

PM 41708829

SIGN SPACING	DISTANCE
ROAD TYPE	A
Urban - 25 MPH or less	200'
Urban - 30 MPH or more	350'
Rural	500'
Expressway/Freeway	1000'

SEE:

- TABLE 1 for Buffer Length (page 26)
- TABLE 4 for "L" & Channelizer (cones, etc.) Quantity (page 28)

NOTE: LOCAL REGULATIONS MAY VARY.

PGEFM1A

© Copyright 2002 InCom, Inc. All rights reserved.