COUNTY OF SAN JOAQUIN

DEPARTMENT OF PUBLIC WORKS
P.O. BOX 1810-1810 E. HAZELTON AVENUE
STOCKTON, CALIFORNIA 95201
(209) 468-3000
FAX # (209) 468-9324

Permit No: **PS-0900049**
Date Issued: 01/08/2009
Exp. Date: 01/15/2009
Project No: PWP110005
Quad: NW

ENCROACHMENT PERMIT

To: KING ISLAND RESORT
11530 W. EIGHT MILE RD.
STOCKTON, CA 95219

Encroachment Type:

Trench			

Location:
BOTH SIDES OF ATHERTON RD. 500' S/O EIGHT MILE RD.

In compliance with your request of **01/08/2009** , permission is hereby granted to do work in County right-of-way as shown on attached application and subject to all the terms, conditions and restrictions written below or printed as general or special provisions on any part of this form. See reverse side and attached sheet, if any.

Trench excavations for service connections will not be permitted within ten feet (10') of pavement centerline unless otherwise approved by the Director. Surface of trench patches shall match in kind and be smooth and even with that of abutting surface. Special attention shall be given to depth of utilities through roadside area in anticipation of future drainage facilities, road profile and/or frontage development. All underground utility facilities are to be established and accurately dimensioned on sketches from surveyed centerline of road right of way, or from right of way (border) lines.

The Department of Public Works, Field Inspection Section shall receive a notice at least forty-eight hours prior to beginning any work within the County right of way. All work performed under this permit shall conform to the rules and regulations pertaining to safety established by the California Division of Industrial Safety and Cal-OSHA.

The jobsite shall be kept in a safe condition at all times by the daily removal of any excess dirt or debris which might be a hazard to either pedestrian or automobile traffic. All necessary traffic convenience and warning devices and personnel shall be provided, placed and maintained by and at the sole expense of the Permittee in accordance with the latest edition of the CALTRANS Manual of Traffic Control.

After completion of the work permitted herein, all debris, lumber, barricades, or any excess material shall be removed and the jobsite left in a neat workmanlike manner. Immediately following completion of construction permitted herein, Permittee shall fill out and mail notice of completion provided by Grantor.

Special Comments:
Traffic Control per MUTCD - Repave road to County Standard R-29

FORMS:

SS/WW, R-29		

Est. Permit Fee: $251.90

THOMAS R. FLINN, Director
Department of Public Works

By: _____
Permit Section

WHITE	-Permitee
GOLDENROD	-PWD Central File
YELLOW	-Field Inspection
PINK	-Permit Section

ENCROACHMENT PERMIT

GENERAL PROVISIONS

1. This permit is issued under and subject to all laws and ordinances of agencies governing the encroachment herein permitted. See the following references:
   STREETS AND HIGHWAYS CODE
   1. Division 1, Chapter 3
   2. Division 2, Chapter 2, Section 942
   3. Division 2, Chapter 4, Section 1126
   4. Division 2, Chapter 6

   SAN JOAQUIN COUNTY ORDINANCES NUMBERED: 324, 441, 648, 662, 672, 695, 700, 860, and 892.

2. It is understood and agreed by the Permittee that the doing of any work under this permit shall constitute an acceptance of all the provisions contained herein and failure on the Permittee's part to comply with any provision will be cause for revocation of this permit. Except as otherwise provided for public agencies and franchise holders, this permit is revocable on five days notice.

3. All work shall be done subject to the supervision of and the satisfaction of the grantor. The Permittee shall at all times during the progress of the work keep the County Highway in as neat and clean a condition as is possible and upon completion of the work granted herein, shall leave the County Highway in a thoroughly neat, clean and usable condition.

4. The Permittee also agrees by the acceptance of this permit to properly maintain any encroachment structure placed by the Permittee on any part of the County Highway and to immediately repair any injury to any portion of the highway, which occurs as a result of the maintenance of the said encroachment structure, until such time as the Permittee may be relieved of the responsibility of such maintenance of the encroachment structure by the County of San Joaquin.

5. The Permittee also agrees by the acceptance of this permit to make, at its own expense, such repairs as may be deemed necessary by the County Director of Public Works or his representative.

6. It is further agreed by the Permittee that whenever construction, reconstruction or maintenance work upon the highway may. require, the installation provided for herein shall, upon request of the County Department of Public Works, be immediately moved by and at the sole expense of the Permittee.

7. No material used for fill or backfill in the construction of the encroachment shall be borrowed or taken from within the County right of way.

8. All work shall be planned and carried out so that there will be as little inconvenience as possible to the traveling public. No material shall be stacked within eight feet (8') of the edge of the pavement or traveled way unless otherwise provided herein. Adequate provision shall be made for the protection of the traveling public. Barricades shall be placed, With approved Signs and lights at light, and flagmen shall be employed, all as may be required by the particular work in progress.

9. The Permittee, by the acceptance of this permit, shall assume full responsibility for all liability for personal injury or damage to property which may arise out of the work herein permitted or which may arise out of the failure of the part of the Permittee to do the work provided for under this permit. In the event any .claim of such liability is made against the County of San Joaquin or any department, official or employee thereof, the Permittee shall defend, indemnify, and hold them and each of them harmless for such claim.

10. All backfill material is to be moistened as necessary and thoroughly compacted with mechanical means. If required by the County Director of Public Works, such backfill shall consist of gravel or crushed rock. The Permittee shall maintain the surface over structures placed hereunder as may be necessary to insure the return of the roadway to a completely Stable condition and until relieved of such responsibility by the County Department of Public Works. Wherever a gravel, crushed rock or asphalt surfacing is cut or damaged in the work of placing an encroachment structure, such material shall either be separately stored and replaced in the roadway as nearly as possible.in its original state or shall be replaced in kind, and the roadway shall be left in at least as good a condition as It was before the commencement of operations of placing the encroachment structure.

11. Whenever necessary to, secure permission from abutting property owners, such authority must be secured by the Permittee prior to starting work..

12. The future safety and convenience of the traveling public shall be given every consideration in the location and type of construction.

APPLICATION FOR ENCROACHMENT PERMIT

PLEASE PRINT:

Date 1-7-09

To: San Joaquin County
Department of Public Works

King Island Resort
(Applicant Name)

11530 W. Eight Mile RD.
(Mailing Address)

Stockton, CA 95219
(City, State, Zip Code)

209-951-2188
(Area Code - Telephone Number)

OFFICE USE ONLY

JOB #	110005	REF #	
APN		CR #	
EXP. DATE	1.15.09		
VALID	1.9.09 TO 1.15.09		DRIVEWAYS:
STREET	ATHERTON RD.		*
AREA	DELTA QUAD NW		*
TYPE	TRENCHING		*
FORMS	SS/WW, E-29		
NOTES			

Sketch (Detailed plans may be submitted)

The undersigned hereby applies for permission to excavate, construct and/or otherwise encroach on County Highway Right-of-Way on the BOTH side of ATHERTON RD. approximately 500 (feet/mile) SOUTH of EIGHT MILE RD., _____, by performing the following work (description of work):

TRENCHING APPROX. 9' DEEP ACROSS ATHERTON RD. → REC. DIST. DOING THE WORK. to replace a 3/4" water line.

Work will commence on or about ASAP for approximately 5 days.

I, the undersigned, certify that I am the owner of the respective property, or am qualified to represent the owner and agree to do the work described above in accordance with the rules and regulations of San Joaquin County and subject to inspection and approval.

General Manager — 1-7-09
Signature of Applicant - Title — Date

Y:\FORMS & TEMPLATES\ENCROACHMENT PERMIT APPLICATION.doc (03/08)

SHERRI - (209) 649-2687 (cell)

Scott Cooper

From: Dodgie Vidad
Sent: Wednesday, January 07, 2009 2:27 PM
To: Scott Cooper
Subject: RE: King Island Encroachment permit info

Scott-
Looks good. Let's just add our typical verbiage of "Signs per MUTCD" on the condition. It may already be on there.

Thanks
Dodgie

-----Original Message-----
From: Scott Cooper
Sent: Wednesday, January 07, 2009 2:23 PM
To: Dodgie Vidad
Subject: FW: King Island Encroachment permit info

Dodgie,
Please take a look at this.
Thanks, Scott

-----Original Message-----
From: Sakfish@aol.com [mailto:Sakfish@aol.com]
Sent: Wednesday, January 07, 2009 2:03 PM
To: Scott Cooper
Subject: King Island Encroachment permit info

Hi Scott,

Thanks again for your help today. Regarding traffic control for this project we will be doing the following.

Putting up detour signs
Notifying all customers, area residents and vendors by telephone, e-mail and flyers which route will be used to enter property while work is being done. We will have staff on site with flags to help with this issue.

Sherri

New year...new news. Be the first to know what is making headlines.

W Eight Mile Rd
Digging for Leak in Water Pipe
Digging for Leak in Water Pipe
Bacon Island Rd
© 2008 Tele Atlas
Pointer 38°03'28.13" N 121°27'29.41" W elev 0 ft Streaming 100%
Eye alt 1675 ft

Google

ki google earth close up.kmz
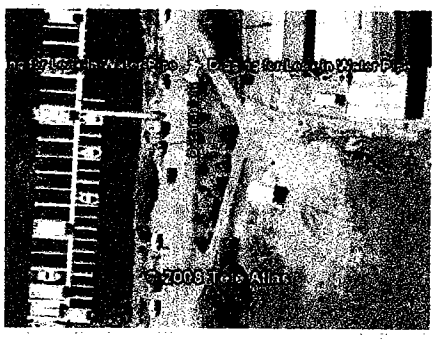
Digging for Leak in Water Pipe