THE WINE GROUP
NORTHERLY TRUCK ENTRANCE IMPROVEMENT

17000 EAST HIGHWAY 120
RIPON, CA 95366

PS-09-2706

GENERAL NOTES:

1. ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE LATEST ADDITION OF THE SAN JOAQUIN IMPROVEMENT STANDARDS
2. CONTRACTOR SHALL OBTAIN AN ENCROACHMENT PERMIT FROM SAN JOAQUIN COUNTY PRIOR TO CONSTRUCTION.
3. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE LABOR CODES.
4. IN THE EVENT OF ANY DISCREPANCY BETWEEN ANY DRAWING AND THE FIGURES WRITTEN THEREON, THE FIGURES SHALL BE TAKEN AS CORRECT.
5. IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, THE CONTRACTOR WILL BE SOLELY AND COMPLETELY RESPONSIBLE FOR THE CONDITIONS OF THE JOB SITE INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF THE WORK. THIS REQUIREMENT WILL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. CONTRACTORS ARE RESPONSIBLE FOR THE DESIGN AND SHORING OF TRENCHES IN ACCORDANCE WITH OCCUPATIONAL SAFETY LAWS, THE DUTIES LAWS. THE DUTIES OF THE ENGINEER DO NOT INCLUDE REVIEW OF THE ADEQUACY OF THE CONTRACTOR'S SAFETY MEASURES, IN, ON, OR NEAR THE CONSTRUCTION SITE. SHOULD IT APPEAR THAT THE WORK TO BE DONE, OR ANY MATTER RELATIVE THERETO, IS NOT SUFFICIENTLY DETAILED OR EXPLAINED ON THESE PLANS, THE CONTRACTOR SHALL CONTACT THE ENGINEER FOR SUCH FURTHER EXPLANATIONS AS MAY BE NECESSARY.
6. ALL SAFETY AND TRAFFIC CONTROL REQUIRED ON EXISTING STREETS WILL BE THE RESPONSIBILITY OF THE SUBCONTRACTOR PERFORMING SAID WORK.
7. AT ALL TIMES DURING CONSTRUCTION AND UNTIL FINAL COMPLETION, THE CONTRACTOR, WHEN HE OR HIS SUBCONTRACTORS ARE OPERATING EQUIPMENT ON THE SITE, SHALL PREVENT THE FORMATION OF AN AIRBORNE DUST NUISANCE BY WATERING AND/OR TREATING THE SITE OF THE WORK IN SUCH A MANNER THAT HE WILL BE RESPONSIBLE FOR ANY DAMAGE DONE BY DUST FROM HIS OR HIS SUBCONTRACTOR'S ACTIVITIES IN PERFORMING THE WORK UNDER THIS CONTRACT.

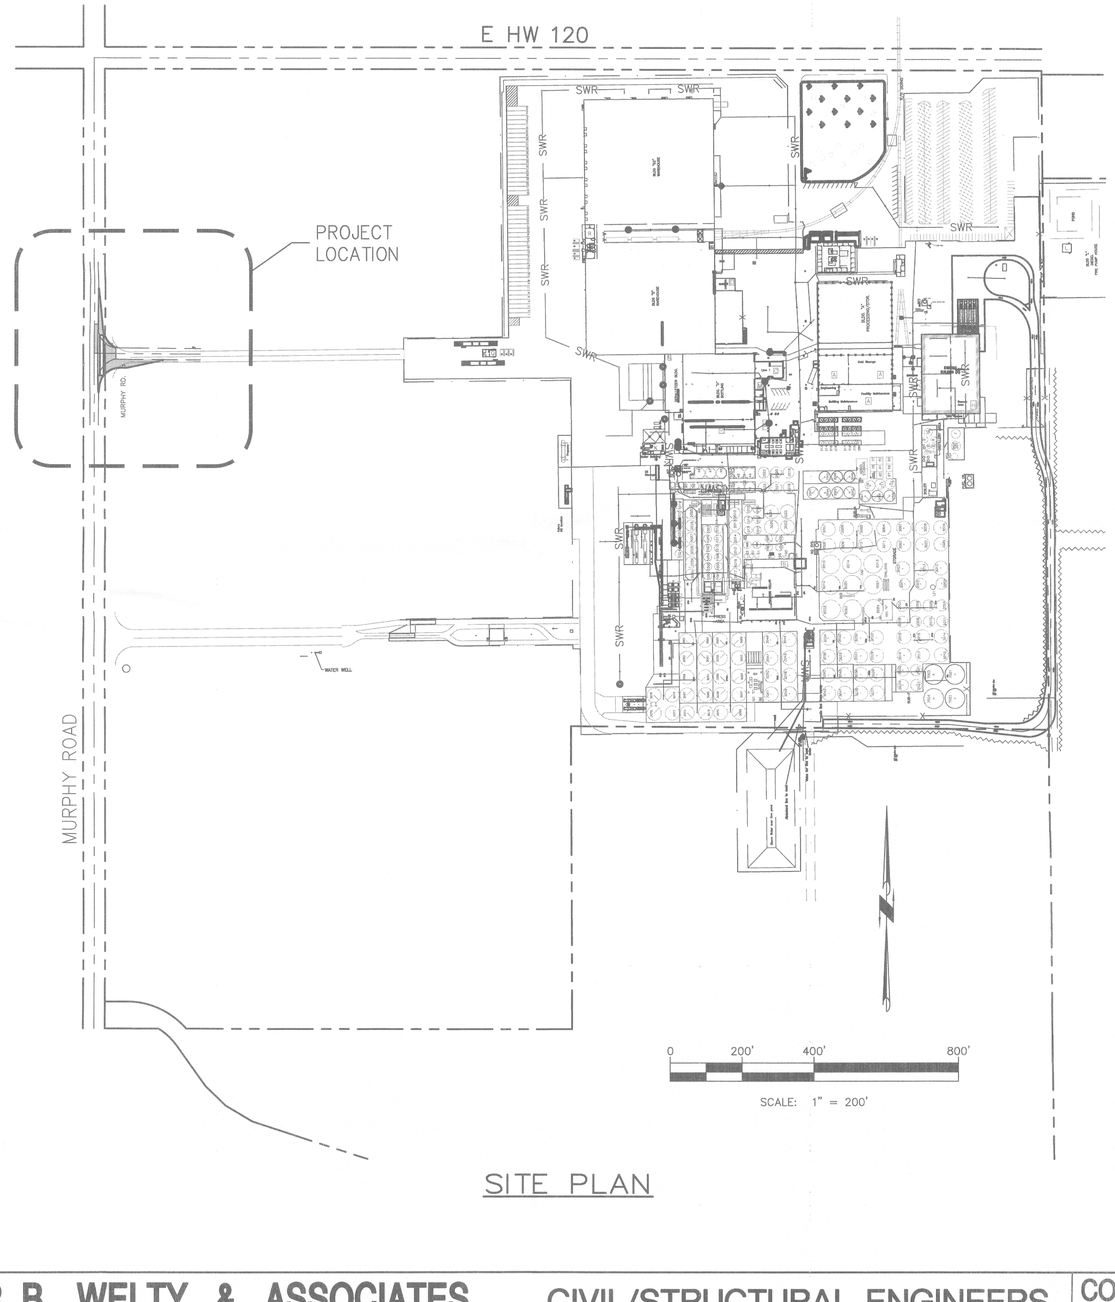

SITE PLAN

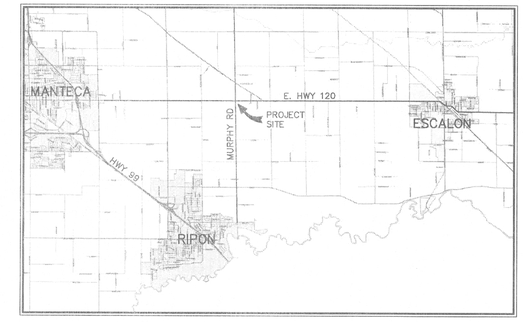

VICINITY MAP
N.T.S.

ABBREVIATIONS:

AC	—	ASPHALT CONCRETE
AB	—	AGGREGATE BASE
CL	—	CENTERLINE
DIA./ø	—	DIAMETER
E	—	ELECTRICAL LINE
EP	—	EDGE OF PAVEMENT
EX	—	EXISTING
FL	—	FLOW LINE ELEVATION
IRR	—	IRRIGATION
LF	—	LINEAL/LINEAR FEET
LIP	—	LIP OF GUTTER
MAX	—	MAXIMUM
MIN	—	MINIMUM
MH	—	MANHOLE
N.T.S.	—	NOT TO SCALE
OH	—	OVERHEAD POWER LINE
P	—	PAVEMENT ELEVATION
PP	—	POWER POLE
PROP	—	PROPOSED
R	—	RADIUS
TOE	—	TOE OF DITCH
TOP	—	TOP OF DITCH
TYP	—	TYPICAL

DRAWING INDEX:

C1 COVER SHEET
C2 DIMENSION PLAN
C3 GRADING AND DRAINAGE PLAN
C4 STRIPING PLAN

NOTES:

1. CONTRACTOR SHALL CALL "UNDERGROUND SERVICE ALERT", TOLL FREE 1-800-642-2444 AT LEAST 48 HOURS PRIOR TO COMMENCEMENT OF WORK TO MARK THE ACTUAL LOCATION OF THE EXISTING UTILITY LINES.

GRADING NOTES:

A. ALL GRADING, DEMOLITION AND SITE PREPARATION SHALL COMPLY WITH APPENDIX CHAPTER 33 OF THE 2007 CBC, CALIFORNIA BUILDING CODE.

LEGEND:

- UTILITY VAULT
- FIRE HYDRANT
- WATER VALVE
- POWER POLE
- LIGHT POLE

NOTE TO DEVELOPERS AND CONTRACTOR:

THESE IMPROVEMENT PLANS HAVE BEEN PREPARED WITH THE INTENT THAT THE FIRM OF R.B. WELTY & ASSOCIATES WILL BE PERFORMING THE CONSTRUCTION STAKING FOR THE COMPLETE PROJECT. IF, HOWEVER ANOTHER ENGINEERING AND/OR SURVEYING FIRM SHOULD BE EMPLOYED TO USE THESE PLANS FOR THE PROPOSED OF CONSTRUCTION STAKING, NOTICE IS HEREBY GIVEN THAT THE FIRM OF R.B. WELTY & ASSOCIATES WILL NOT ASSUME ANY RESPONSIBILITY FOR ERRORS OR OMISSIONS IF ANY, WHICH MIGHT OCCUR AND WHICH COULD HAVE AVOIDED. CORRECTED OR MITIGATED IF R.B. WELTY & ASSOCIATES HAD PERFORMED THE STAKING WORK.

CA:800-642-2444
CALL BEFORE YOU DIG
USA
UNDERGROUND SERVICE ALERT

REGISTERED PROFESSIONAL ENGINEER
FELIX J. REICHMUTH
No. 20208
9-30-11
CIVIL
STATE OF CALIFORNIA
12/28/09

COUNTY OF SAN JOAQUIN
DEPARTMENT OF PUBLIC WORKS
APPROVED: DATE:
RCE NO:
DIRECTOR OF PUBLIC WORKS EXP. DATE:

The design, planning and engineering data contained in this plan are the sole property of R. B. Welty & Associates, Inc. and shall not be used, copied or duplicated in part or in whole by any other person, Corporation or Company without the written permission of R. B. Welty & Associates, Inc. This drawing is not to be used for Construction until it is approved, signed, sealed and dated.

REVISIONS				
No.	DESCRIPTION	BY	DATE	DATE 12/28/09
				DR DANIS
				CK
				APPROVED

R. B. WELTY & ASSOCIATES, INC. CIVIL/STRUCTURAL ENGINEERS
P.O. BOX 1724 (MAILING ADDRESS)
521 13th STREET (LOCATION) MODESTO, CALIFORNIA 95353 - 1724 (209) 526-1515
FELIX J. REICHMUTH SE 2090, C 20208
JUSTIN W. CAPP SE 4813, C 61393
KAISER I. SHAHBAZ LS 8599

COVER SHEET
THE WINE GROUP - NORTHERLY TRUCK ENTRANCE IMPROVEMENT
17000 E. HWY 120
RIPON, CA 95366

JOB No. 78348
SHEET C1 OF

G:\78000\78348_twg driveway\78348.dwg 12-28-09 10:23:49 AM Disho